


■RT 系列铝电解电容器

RT Series Aluminum Electrolytic Capacitor

◆特征

Feature

- * 寿命: 105℃ 2000~3000 小时
Load life:105℃ 2000~3000 hours.
- * 宽温度特性
Wide operating temperature range.
- * 符合 RoHS
Compliant to the RoHS Directive.

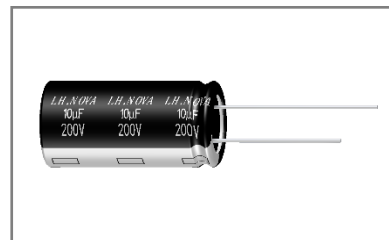

◆应用


Application

- * 适用于开关电源、通信设备及其它各种电子产品
Ideally suited for switching power supplies, telecommunication and other electronic products.

◆型号表示法

Part Number

8		680		VB		M		0511		RT		N		0		1		1		0			
代码 Code		产品类别 Type		代码 Code		电压 Voltage		代码 Code		尺寸 Dimensions ΦDxL(mm)		代码 Code		商标 Trademark		代码 Code		内码 Internal Code		代码 Code		产品脚型 Lead Forming Type	
8		成品 Product		LA		6.3		0511		Φ5x11		N		LH.NOVA		1		105℃		0		散装品 Bulk	
				LB		10		AA12		Φ6.3x12										P		直脚方式编带品 original type(verical) tape	
				LC		16		0812		Φ8x12													
				LD		25		1020		Φ10x20													
				VA		400		AB20		Φ12.5x20													
				VE		420		1820		Φ18x40													
				VB		450																	
				VC		500																	
代码 Code		标称容量 Nominal Capacitance		代码 Code		误差 Tolerance		代码 Code		型号 Series		代码 Code		胶管颜色 Sleeve Color		代码 Code		内码 Internal Code					
R68		0.68uF		K		±10%		RT		RT		0		黑色 Black		1		普通品 regular					
680		68uF		V		± ²⁰ ₁₀ %						1		深蓝色 Deep-blue		E		PET 胶管 平台胶粒					
501		500uF		M		±20%						7		棕色 Brown		F		PET 胶管 凹台胶粒					
472		4700uF		Q		± ³⁰ ₁₀ %						9		绿色 Green									
103		10000uF																					

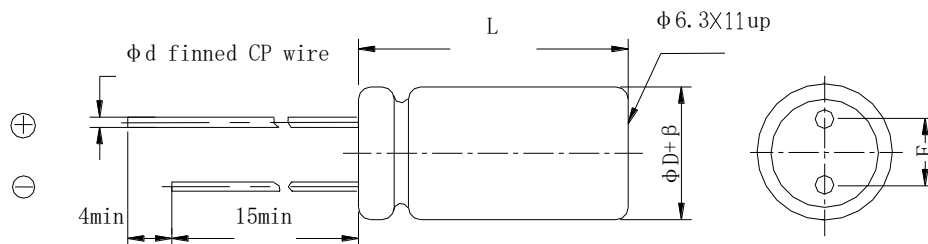◆产品结构
Product Structure


β(mm)	±0.5			±1.0				
ΦD(mm)	5	6.3	8	10	12.5	16	18	22
F±0.5(mm)	2.	2.5	3.5	5.0		7.5		10.0
Φd±0.1(mm)	0.5		0.6			0.8		
L(mm)	11,12		12,16	12,16,	16,20,25	16,20,25,30,35	20,25,30,35,40	25,30,35,40
	L±2.0							

◆主要特性表
Main specifications

项目 Item	主要特性 Performance Characteristics									
额定工作电压范围 Rated Voltage Range	6.3~100V.DC					160~500V.DC				
使用温度范围 Operating Temperature Range	-40℃~-+105℃					-40℃~-+105℃				
标称静电容量范围 Nominal Capacitance Range	0.68~10000 μ F					1~220 μ F				
静电容量允许偏差 Capacitance Tolerance	±20% (M, +20℃, 120Hz)									
漏电流 Leakage Current (20℃)	额定工作电压(V) Rated working voltage	6.3~100				160~500				
	漏电流 Leakage current	2 分钟后 ≤0.01CV 或 3(μA),取最大 值 After 2 min. ≤0.01CV or 3(μA), Whichever is greater.				2 分钟后 ≤0.03CV+25(μA) After 2 min . ≤0.03CV+25(μA)				
C: 标称静电容量 (μF) Nominal Capacitance in μF V: 额定工作电压 (V) Rated working voltage in V										
损耗角正切 DF Dissipation Factor	额定工作电压(V) Rated working voltage	6.3	10	16	25	35	50	63	100	160~500
	DF(MAX) (20℃,120Hz)	0.26	0.22	0.18	0.16	0.14	0.12	0.10	0.08	0.15
当容量值大于 1000μF 时, 每增加 1000μF, DF 值加 0.02 For capacitance of more than 1000μF,add 0.02 forevery increase of 1000μF.										

浪涌电压 Surge Voltage Test	额定工作电压(V) Rated working voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	500							
	浪涌电压(V) Surge voltage		8	13	20	32	44	63	79	125	200	250	300	400	450	500	550							
	施加表中所列浪涌电压, 充电 30±5 秒, 放电 5.5± 0.5 分钟作为一个周期, 共进行 1000 次。 测试温度: 15℃-35℃然后在标准大气条件下放置达到热稳定, 测试各参数。 Application of DC surge Voltage stated at table,1000 times of charging for 30 ± 5 sec.,discharging with a period of 5.5± 0.5 min.. Test temperature: 15℃ -35℃And the capacitor shall be stored under standard atmospheric conditions to obtain thermal stability, after which measurements shall be made. 容量变化: 在初始值的± 20%以内。损耗角正切值不大于规定值的 200%。漏电流: 不大于初始规定值 Capacitance change:Within ± 20% of the initial value Dissipation factor:Not more than 200% of the specified value.Leakage current: more than the initial specified value																							
温度特性 Temperature Stability	额定工作电压(V) Rated working voltage		6.3	10	16	25	35	50	63	100	160~250	350~450	500											
	阻抗比(120Hz) Impedance Ratio	z-25℃ /z+20℃	4	3	2	2	2	2	2	2	3	4	6											
		z-40℃ /z+20℃	8	6	4	4	3	3	3	3	8	12	15											
高温负荷特性 Load life	在+105℃ 环境中施加额定工作电压和最大允许纹波电流 2000~3000 小时后,电容器的性能符合下面要求: After application of rated working voltage with max permissible ripple current specified at +105℃ for 2000 ~3000hours, capacitors meet the characteristics requirements measured at +20℃ listed at below: 1、电容量变化率:±20%初始测量值以内 Capacitance change : ±20% initial measured value 2、漏电流: ≤初始规定值 Leakage current: ≤initial specified value 3、损耗角正切值≤200%倍初始规定值 Dissipation factor: ≤200% initial specified value																							
			<table><tr><td>外径</td><td>时间 (hrs)</td></tr><tr><td>Case Dia</td><td>Life Time</td></tr><tr><td>φD≤8</td><td>2000</td></tr><tr><td>φD≥10</td><td>3000</td></tr></table>															外径	时间 (hrs)	Case Dia	Life Time	φD≤8	2000	φD≥10
外径	时间 (hrs)																							
Case Dia	Life Time																							
φD≤8	2000																							
φD≥10	3000																							
高温贮存特性 Shelf life	在+105℃环境无负荷放置 1000 小时后, 根据 JIS-C-5101-4, 加额定电压 30min.,常温放置 24~48 小时后测试, 电容器的性能符合下面要求: After leaving capacitors under no load at +105 ℃ for 1000 hours, According to JIS-C-5101-4, apply the rated DC voltage for 30 minutes and store the capacitors under room temperature for 24-48 hours. The capacitors meet the characteristics listed as below: 1、电容量变化率:±20%初始测量值以内 Capacitance change : ±20% initial measured value 2、漏电流: ≤初始规定值 Leakage current:≤initial specified value 3、损耗角正切值≤200%倍初始规定值 Dissipation factor: ≤200% initial specified value																							

耐焊接热 Resistance to soldering heat	焊锡温度: $260 \pm 5^{\circ}\text{C}$, 浸入时间: 10 ± 1 秒, 浸入深度: 1.6mm Solderbath temperature: $260 \pm 5^{\circ}\text{C}$, Immersion time: $10 \pm 1\text{sec}$. Immersion depth: 1.6mm 外观: 无异状 Appearance: No remarkable abnormality 容量变化: 在初始值$\pm 10\%$范围内 Capacitance change: Within $\pm 10\%$ of the initial value. 损失角正切值: 不大于初始规定值 Dissipation factor: $\leq$ initial specified value 漏电流: 不大于初始规定值 Leakage current: $\leq$ initial specified value
稳态湿热 Resistance to damp heat (steady state)	试验温湿度: $40 \pm 2^{\circ}\text{C}$, 90~95%RH 试验时间: $500 \pm 10\text{h}$ 试验后, 电容器在标准大气条件下 2 小时, 然后测试参数 Test temperature and humidity: $40 \pm 2^{\circ}\text{C}$, 90~95%RH Test time: $500 \pm 10\text{h}$ After completion of test, the capacitor shall be subjected to standard atmospheric conditions for 2 hours, after which measurements shall be made. 外观: 无异状 Appearance: No remarkable abnormality 容量变化: 在初始值$\pm 10\%$范围内 Capacitance change: Within $\pm 10\%$ of the initial value. 损失角正切值: 不大于初始规定值 Dissipation factor: $\leq$ initial specified value 漏电流: 不大于初始规定值 Leakage current: $\leq$ initial specified value
防爆试验 Safety vent	以下试验只适用于铝壳直径$\geq \Phi 8$ 产品。 The following tests only apply to those products with vent products at diameter $\geq \Phi 8$ with vent. 在电容器两极施加反向直流电压, 其中通过的电流为 1A, 在测试时防爆装置应能在 30 分钟内动作。 DC Application test: The capacitor shall be subjected to a reverse DC voltage. The current flowing through the capacitor shall be 1A. If the vent does work with the voltage applied for 30 minutes, the test is considered to be passed. 应无引线、铝箔等散射, 无火花产生 The safety vent is actuated under the test conditions, thereby preventing terminals, metal pieces, etc, of the capacitor from scattering due to burst, the case from separating from the seal packing, or the capacitor from producing flame.

可焊性 Solder ability	焊锡温度：235±5℃ 浸入时间：2±0.5 秒 Temperature of solder: 235±5℃ Dipping time: 2±0.5sec. This specification shall be met after the capacitors are stored under standard atmospheric conditions for 6 months. 浸入焊锡的引线表面积约 90%以上应附着新锡。 At least 90% of circumferential surface of the dipping portion of terminal shall be covered with new solder.																								
端子强度 Terminal strength	端子抗拉强度：沿电容器端子引线方向施加拉力(如下表)，10±1 秒。 <table><tr><td>引线直径 φ</td><td>0.45</td><td>0.50</td><td>0.60</td><td>0.80</td><td>1.00</td></tr><tr><td>拉力 N</td><td>5</td><td>5</td><td>10</td><td>10</td><td>20</td></tr></table> Tensile strength of terminal: Astatic load shall be applied to the terminal in the axial direction and acting in a direction away from the body for 10±1 sec. 端子抗弯强度：在电容器引线施加固定重力（如下表），然后 5 秒内完成将电容体弯折 90° 后回到原位，再向相反方向弯折 90° 后回到原位。 <table><tr><td>引线直径 φ</td><td>0.45</td><td>0.50</td><td>0.60</td><td>0.80</td><td>1.00</td></tr><tr><td>拉力 N</td><td>2.5</td><td>2.5</td><td>5</td><td>2</td><td>10</td></tr></table> Bending strength of terminal: Hang the specified dead weight, in about 5 sec then bend the body through 90°, return to the original position. Next bend it in opposite direction through 90° with the same speed, again return to the original position 外观：无可见机械损伤 Appearance: no visible mechanical damage 电容器应无接触不良开路或短路 The capacitor shall be no intermittent contacts, or open or short circuiting	引线直径 φ	0.45	0.50	0.60	0.80	1.00	拉力 N	5	5	10	10	20	引线直径 φ	0.45	0.50	0.60	0.80	1.00	拉力 N	2.5	2.5	5	2	10
引线直径 φ	0.45	0.50	0.60	0.80	1.00																				
拉力 N	5	5	10	10	20																				
引线直径 φ	0.45	0.50	0.60	0.80	1.00																				
拉力 N	2.5	2.5	5	2	10																				
振动试验 Resistance to vibration	在 3 个互相垂直的方向分别施加 2 小时振动，共 6 小时。 频率：10-55Hz 振幅峰-峰值：1.5mm. 振速：1 分钟内振速 10～55～10Hz Direction and duration of vibration: 3 orthogonal directions mutually each for 2h , Total 6h. Vibration frequency range :10-55Hz. Peak to peak amplitude: 1.5mm Sweep rate :10 to 55 to 10Hz in about 1 min. 外观：无可见机械损伤 Appearance: no visible mechanical damage 电容器应无接触不良开路或短路 The capacitor shall be no intermittent contacts, or open or short circuiting																								

◆尺寸表、允许纹波、电流纹波电流频率因子

Dimensions and ripple current and frequency coefficient

纹波电流频率因子

Ripple current frequency coefficient

Freq (Hz) WV(V)	50 (60)	100 (120)	1K	10K	≥100K
6.3~100	0.20	0.40	0.70	0.80	1.00
160~500	0.25	0.50	0.80	0.90	1.00

尺寸表与允许纹波电流

Dimensions and ripple current

WV/V Cap/μF	6.3 (LA)		10(LB)		16(LC)		25(LD)		35(LE)		50(LF)		63(LG)		100(MA)	
	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)
0.68											5×11	15			5×11	16
1											5×11	18	5×11	20	5×11	23
1.5											5×11	23	5×11	24	5×11	25
2.2											5×11	28	5×11	30	5×11	33
3.3											5×11	38	5×11	40	5×11	44
4.7							5×11	36	5×11	41	5×11	45	5×11	51	5×11	55
6.8							5×11	60	5×11	47	5×11	58	5×11	68	6.3×12	70
10					5×11	52	5×11	60	5×11	66	5×11	76	5×11	83	6.3×12	98
15					5×11	60	5×11	70	5×11	77	5×11	78	6.3×12	90	8×12	110
22	5×11	51	5×11	68	5×11	82	5×11	87	5×11	98	6.3×12	110	6.3×12	130	8×12	170
33	5×11	83	5×11	98	5×11	98	5×11	105	6.3×12	130	6.3×12	160	6.3×12	165	10×12	240
47	5×11	98	5×11	105	5×11	120	6.3×12	120	6.3×12	170	6.3×12	185	8×12	230	10×12	310
68	5×11	110	5×11	120	6.3×12	150	6.3×12	160	6.3×12	190	8×12	230	8×12	250	10×16	440
100	5×11	150	6.3×12	160	6.3×12	190	6.3×12	210	8×12	280	8×12	310	10×12	380	10×20	580
150	6.3×12	180	6.3×12	200	6.3×12	250	8×12	270	8×12	440	10×12	420	10×16	480	12.5×25	680
220	6.3×12	240	6.3×12	260	6.3×12 8×12	250 330	8×12	360	10×12	480	10×16	600	10×20	700	12.5×25	860
330	6.3×12	310	8×12	380	8×12	400	10×12	530	10×16	650	10×20	800	12.5×20	980	16×25	1080
470	8×12	420	8×12	440	10×12	590	10×16	700	10×20	870	12.5×20	1100	12.5×20 12.5×25	1200	16×30	1300
680	8×12	520	10×12	620	10×16	740	10×20	950	12.5×20	980	12.5×25	1220	16×25	1380	18×30	1680
1000	10×12	690	10×16	800	10×20	1050	12.5×20	1280	12.5×25	1500	16×25	1650	16×30	1800	18×40	1980
1500	10×16	894	10×20	1050	12.5×20	1210	12.5×25	1400	16×25	1600	16×30	1850	18×30	2300		
2200	10×20	1380	12.5×20	1500	12.5×25	1700	16×25	1840	16×30	2200	16×35 18×30	2230	18×40	2700		
3300	12.5×20	1650	12.5×25	1820	16×25	1950	16×30	2200	18×30	2500	18×40	2710				
4700	12.5×25	1980	16×25	2100	16×30	2350	18×30	2400	18×40	3100						
6800	16×25	2220	16×30	2400	18×30	2600										
10000	16×30	2730	18×30	2920	18×35	3200										

(1) 外形尺寸 Case Size D×L(mm)

(2) 最大允许纹波电流 Max allowable ripple current (mA rms +105℃,100KHz)

WV/V	160(MB)		200(MC)		250(MD)		350(MF)		400(VA)		450(VB)		500(VC)	
Cap/ μ F	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)	(1)	(2)
1							8×12	70	8×12	80	8×12	80	8×12	80
1.8							8×12	75	10×12	85	10×12	100	10×12	100
2.2							8×12	80	10×12	90	10×12	110	10×12	110
3.3							10×12	100	10×16	110	10×16	150	10×16	150
4.7	8×12	70	8×12	72	10×12	100	10×16	150	10×16	150	10×20	180	10×20	180
6.8	8×12	80	8×12	83	10×16	110	10×16	180	10×20	180	10×20	180	10×20	180
10	10×16	130	10×16	250	10×16	180	10×20	250	12.5×20	250	12.5×20	280	12.5×20	280
15	10×16	150	10×20	250	10×16	280	12.5×20	280	12.5×20	280	12.5×25	330	12.5×25	350
22	10×20	200	10×20	250	10×20	300	12.5×20	300	12.5×25	310	16×25	330	16×25	350
33	10×20	250	12.5×20	300	12.5×20	350	12.5×25	330	16×25	350	16×30	380	16×30	380
47	12.5×20	300	12.5×20	300	12.5×25	380	16×25	350	16×30	380	18×30	430	18×30	430
68	12.5×25	380	12.5×25	380	16×25	430	16×25	390	16×30	400	18×30	440	18×25 18×40	450 550
100	16×25	660	16×25	600	16×30	650	18×30	460	18×30	460	18×40	510		
120	16×25	680	16×25	680	16×30	660	18×35	500	18×35	500				
220	16×30	720	18×30	720	18×35	750								

(1) 外形尺寸 Case Size D×L(mm)


(2) 最大允许纹波电流 Max allowable ripple current (mA rms +105℃, 100KHz)

◆包装

Packaging

* 编带产品包装规范与数量 Taped packaging quantity

直径 ΦD(mm)	数量(只) Qty. (Pcs)	L(电容高度)≤22mm	L(电容高度)=25±2mm
		L×W×H(mm)	L×W×H(mm)
Φ5	2000	328×235×50	328×235×57
Φ6.3	1500		
Φ8	1000		
Φ10	600		
Φ12.5	400		
Φ16	250		
Φ18	200		



* 散装品包装数量 Bulk packaging quantity

直径 ΦD(mm) Diameter	高度 L(mm) Length	数量 (只/袋) Quantity (pcs/bag)	袋/盒 bag/box	内箱/外箱 Inner box/outer box	(只/箱) psc/box
Φ4	7-8	1000	15	4	60000
Φ5	5-7	1000	12	4	48000
Φ6	11	1000	10	4	40000
Φ6.3	5-7	1000	10	4	40000
Φ6.3	8-15	1000	8	4	32000
Φ6.3	15-20	1000	6	4	24000
Φ8	5-12	500	8	4	16000
Φ8	14-16	500	8	4	16000
Φ8	20	500	6	4	12000
Φ10	9-13	500	6	4	12000
Φ10	14-16	250	8	4	8000
Φ10	17-20	250	8	4	8000
Φ10	25-30	200	8	4	6400

直径 ΦD(mm) Diameter	高度 L(mm) Length	数量 (只/袋) Quantity (pcs/bag)	袋/盒 bag/box	内箱/外箱 Inner box/outer box	(只/箱) psc/box
Φ10	31-35	200	6	4	4800
Φ12-Φ13	16-28	200	6	4	4800
Φ12-Φ13	30-40	100	8	4	3200
Φ12-Φ13	45-55	100	6	4	2400
Φ16	15-20	100	8	4	3200
Φ16	21-30	100	6	4	2400
Φ16	31-40	50	10	4	2000
Φ18	15-20	100	6	2	1200
Φ18	25-30	50	8	2	800
Φ18	35-40	50	6	2	600
Φ18	41-50	25	10	2	500
Φ20	25-40	50	10	2	1000
Φ22	25-35	50	5	2	500
Φ22	≥40	25	10	2	500

◆贮存方法 Storage Methods

* 请保管在室温 5°C~35°C，湿度 75%RH 以下的环境

* (1) 产品储存期限：≤12 个月；Storage life: ≤12 months

* (2) 产品储存期限超 12 个月时，需充电后再使用

* (3) 产品储存时间超过 3 年的应报废处理

* (4) 库存有效期以套管上印刷的时间开始计算

* (5) 请尽量以包装状态保管

* (6) 当电容器长期储存后，漏电流会升高，温度越高，漏电流上升越快，因此应注意储存环境。如铝电解电容器的漏电流上升对电路有不良影响，请在使用前充电处理

* (7) 请避免在以下环境中保管

① 溅水、高温高湿及结露的环境；

② 溅油、或者充满气体油成分的环境；

③ 充满酸性有毒气体（硫化氢、亚硫酸、亚硝酸、氯、溴、溴化甲烷等）的环境；

* We recommend the following conditions for storage: Ambient temperature: 5°C~35°C, Ambient humidity: Less than 75% RH.

* (1) Storage life: ≤12 months;

* (2) If storage life time is over 12 months, the products need to be recharged;

* (3) If storage life time is over three years, the product need to be discarded;

* (4) Expiry date: calculating from the date marked on the sleeve;

* (5) Please keep capacitors in the original package;

* (6) Leakage current tends to increase when capacitors have been stored for long period of time. The higher temperature, the faster leakage current rises. Please take caution when selecting the storage location. The leakage current

decreases gradually as voltage is applied to the capacitor. If the rising leakage current may cause problems in the circuit, please charge the capacitor before using.

* (7) Avoid storing the capacitors under such circumstances:

- ① Environment of water splashing, high temperature, high humidity and dewing;
- ② The environment that splashes oil, or is filled with gas oil;
- ③ With full of acid toxic gases environment such as (hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, bromine, methyl bromide, etc.

◆铝电解电容器使用注意事项

Important information on the application of aluminum electrolytic capacitors

* (1) 直流铝电解电容器应按正确的极性使用

当直流铝电解电容器被反极性接入电路时，电容器会导致电子线路短路，由此产生的电流会引致电容器损坏。若电路中有可能在负引线施加正极电压，请选用无极性产品

* (2) 在额定工作电压以下作用

当电容器上所施加电压高于额定工作电压时，电容器的漏电流将上升，其电气特性将在短时间内劣化直至损坏。注意电压峰值请勿超出额定工作电压

* (3) 常规产品禁止作快速充放电使用

当常规电容器被用作快速充电用途。其使用寿命可能会因为容量下降，温度急剧上升等而缩减。

* (4) 施加纹波电流应小于额定值

施加纹波电流超过额定值后，会导致电容器体过热，容量下降，寿命缩短。所施加纹波电压的峰值应小于额定工作电压。

* (5) 使用环境温度

铝电解电容器的使用寿命会受到环境温度的影响。据科学统计，使用环境温度下降 10℃ 其使用寿命增加 1 倍。

* (6) 引出线强度

当拉力施加到电容器引出线，该拉力将作用于电容器内部，这将导致电容器内部短路，开路或漏电流上升。在电容器焊装到电路板，请勿强烈摇动电容器。

* (7) 焊接过程耐热性

铝电解电容器装至电路板进行浸焊或波峰焊时，其塑料套管可能因焊接时间过长、温度过高而发生破裂或二次收缩。

* (8) 电路板的安装孔距及安装位置

电路板安装孔的设计应与产品说明书的引线脚距一致，如果将电容器强行插入孔距不配套的电路板，那么会有应力作用于引出线，这将导致短路或漏电流上升。

* (9) 铝电解电容可能会有残留电压，请在使用前对电容器进行放电。

(1) DC aluminum electrolytic capacitors should be used according to the correct polarity

When a DC aluminum electrolytic capacitor is connected to a circuit with reverse polarity, the capacitor will cause a short circuit in the electronic circuit, and the resulting current will cause damage to the capacitor. If it is possible to apply positive voltage to the negative lead in the circuit, please choose a non-polar product.

(2) Function below rated operating voltage

When capacitor is used at higher voltage than the rated voltage, leakage current increases, characteristics drastically deteriorate and damage in a short period may occur as a result. Please take extra caution that the peak voltage should not exceed the rated voltage.

(3) Conventional capacitors are prohibited from being used for fast charging and discharging

When aluminum electrolytic capacitors for general purpose are employed in rapid charge and discharge application, its life may be shorted by capacitance decreasing, heat rising, etc.

(4) The applied ripple current should be less than the rated value

Excessive heat will reduce capacitance and result in shortened life of capacitor if ripple currents exceeding the specified rated value are applied. The peak value of the ripple voltage should be less than the rated voltage.

(5) Operating ambient temperature

Its ambient temperature closely affects the life of an aluminum electrolytic capacitor. It is generally stated, that life doubles for each 10°C decrease in temperature.

(6) Terminal Strength

When a strong force is applied to the lead wires or terminals, stress is put on the internal connections. This may result in short circuit, open circuit or increased leakage current. It is not advisable to bend or handle a capacitor after it has been soldered to the PCB board.

(7) Heat resistance during welding process

In the dip soldering process of PCB board with aluminum electrolytic capacitors mounted, secondary shrinkage or crack of PVC sleeve may be observed when solder temperature is too high or dipping time is too long.

(8) Installation pitch-row and installation position of circuit boards

PCB board must be designed so its hole coincides with the lead pitch (lead spacing) of the capacitor specified by the catalog or specifications. When a capacitor is forcibly inserted into an unmatched hole, a stress is put on the leads. This could result in a short circuit or increased leakage current.

(9) Aluminum electrolytic capacitors may have residual voltage, please discharge the capacitor before use.

◆推荐安装/焊接方法 Recommended Installation/Welding Methods

*波峰焊接条件


预热：105°C

波峰焊：260±5°C 10±1 秒以下（或 380±10°C 3±0.5 秒以下：手焊）

*Wave Soldering Conditions

Preheating: 105°C

Wave Soldering: 260±5°C for ≤10±1 seconds (or 380±10°C for ≤3±0.5 seconds for manual soldering)

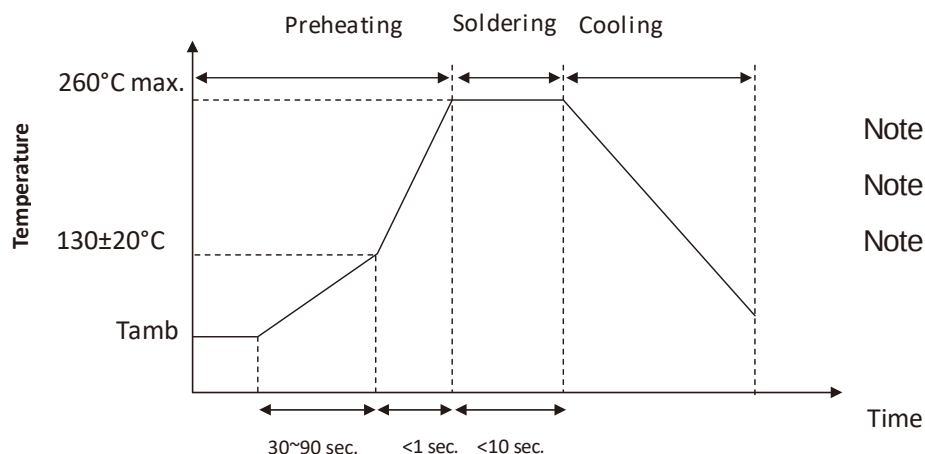

◆ 其它说明 OTHERS

*本产品不含铅、镉等元素

This product does not include Plumbum or Cadmium.

注：上述所提供之内容为产品规格说明。在产品未变更时，风华保有修改此内容不另行通知之所有权利，任何产品变更将会以 P C N 通知客户。