


## ■AMT 系列铝电解电容器

## AMT Series Aluminum Electrolytic Capacitor

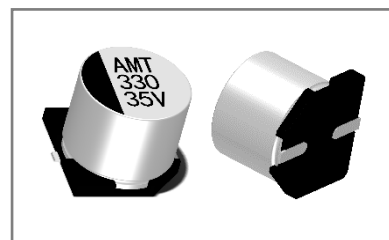

### ◆ 特征

## Feature

- \* 寿命: 105℃ 2000 小时  
Load life:105℃ 2000 hours.
- \* 符合 RoHS  
Compliant to the RoHS Directive.
- \* 符合 AEC-Q200  
Compliant to the AEC-Q200 Directive.

### ◆应用

## Application

- \* 适用于汽车模块电子产品  
Ideally suited for switching power supplies, telecommunication and other electronic products.
- \* 适用于自动表面贴装技术和高密度电路  
Ideally suited for automatic SMT and high density circuits.

### ◆型号表示法

## Part Number

The diagram illustrates the relationship between different code segments of an electronic component. The segments are organized into columns, each representing a different code segment. The segments are: 8 (Product Type), 220 (Nominal Capacitance), LF (Voltage), M (Tolerance), AA05 (Dimensions), MT (Series), 0 (Trademark), 0 (Sleeve Color), 0 (Internal Code), B (Internal Code), and Q (Lead Forming Type). Each segment is represented by a box containing its code and a description. The boxes are connected by lines, showing the flow from the most significant code (8) to the least significant (Q).

| 代码   | 产品类别          |
|------|---------------|
| Code | Type          |
| 8    | 成品<br>Product |

| 代码   | 电压      |
|------|---------|
| Code | Voltage |
| LA   | 6.3     |
| LB   | 10      |
| LC   | 16      |
| LE   | 35      |
| LF   | 50      |
| LG   | 63      |
| MA   | 100     |

| 代码   | 尺寸 Dimensions |
|------|---------------|
| Code | ΦDxL(mm)      |
| 0405 | Φ4x5.5        |
| 0505 | Φ5x5.5        |
| AA05 | Φ6.3x5.5      |
| AA07 | Φ6.3x7.7      |
| 0810 | Φ8x10.5       |
| 1010 | Φ10x10.5      |

| 代码   | 商标        |
|------|-----------|
| Code | Trademark |
| 0    | 无商标       |

| 代码   | 内码                       |
|------|--------------------------|
| Code | Internal Code            |
| 0    | 无印刷温度<br>品, 贴片、闪<br>光灯品, |

| 代码   | 产品脚型                                  |
|------|---------------------------------------|
| Code | Lead Forming<br>Type                  |
| 0    | 散装品 Bulk                              |
| Q    | 胶盘包装<br>Tape and<br>Reel<br>Packaging |


| 代码   | 标称容量                |
|------|---------------------|
| Code | Nominal Capacitance |
| R10  | 0.1uF               |
| 1R0  | 1uF                 |
| 2R2  | 2.2uF               |
| 220  | 22uF                |
| 102  | 1000uF              |

| 代码   | 误差                              |
|------|---------------------------------|
| Code | Tolerance                       |
| K    | ±10%                            |
| V    | ± <sup>20</sup> <sub>10</sub> % |
| M    | ±20%                            |
| Q    | ± <sup>30</sup> <sub>10</sub> % |

| 代码   | 型号     |
|------|--------|
| Code | Series |
| MT   | AMT    |

| 代码   | 胶管颜色            |
|------|-----------------|
| Code | Sleeve Color    |
| 0    | 无胶管<br>No label |

| 代码   | 内码                                |
|------|-----------------------------------|
| Code | Internal Code                     |
| B    | 汽车电子<br>Automotive<br>electronics |

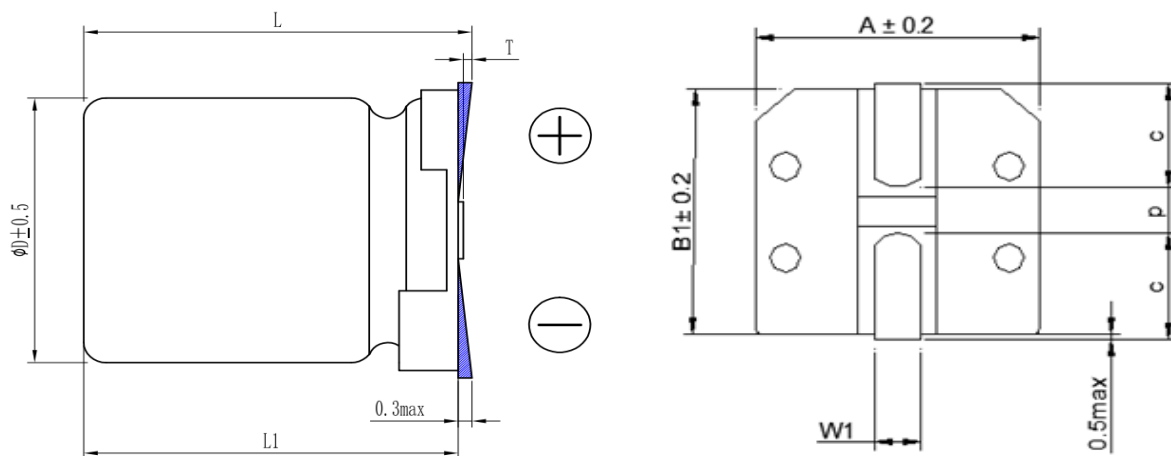**◆产品结构**
**Product Structure**


| $\Phi D \pm 0.5$ | L              | $A \pm 0.2$ | $B_1$ | $C \pm 0.2$ | $W_1$   | $P \pm 0.2$ |
|------------------|----------------|-------------|-------|-------------|---------|-------------|
| 4                | $5.5 \pm 0.2$  | 4.3         | 4.3   | 1.8         | 0.5~0.8 | 1.0         |
| 5                | $5.5 \pm 0.2$  | 5.3         | 5.3   | 2.1         | 0.5~0.8 | 1.4         |
| 6.3              | $5.5 \pm 0.2$  | 6.6         | 6.6   | 2.5         | 0.5~0.8 | 2.0         |
| 6.3              | $7.7 \pm 0.3$  | 6.6         | 6.6   | 2.5         | 0.5~0.8 | 2.0         |
| 8                | $10.5 \pm 0.5$ | 8.5         | 8.5   | 2.9         | 0.8~1.1 | 3.1         |
| 10               | $10.5 \pm 0.5$ | 10.3        | 10.3  | 3.2         | 0.8~1.1 | 4.5         |

**◆主要特性表**
**Main specifications**

| 项目 Item                               | 主要特性 Performance Characteristics                                                     |  |                                                                                         |      |      |      |      |        |
|---------------------------------------|--------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------|------|------|------|------|--------|
| 额定工作电压范围<br>Rated Voltage Range       | 6.3~100V.DC                                                                          |  |                                                                                         |      |      |      |      |        |
| 使用温度范围<br>Operating Temperature Range | -55℃~+105℃                                                                           |  |                                                                                         |      |      |      |      |        |
| 标称静电容量范围<br>Nominal Capacitance Range | 0.1~1000 μ F                                                                         |  |                                                                                         |      |      |      |      |        |
| 静电容量允许偏差<br>Capacitance Tolerance     | ±20% (M, +20℃, 120Hz)                                                                |  |                                                                                         |      |      |      |      |        |
| 漏电流<br>Leakage Current (20℃)          | 额定工作电压(V)<br>Rated working voltage                                                   |  | 6.3~100                                                                                 |      |      |      |      |        |
|                                       | 漏电流<br>Leakage current                                                               |  | 2 分钟后 I≤0.01CV 或 3(μ A), 取较大值<br>After 2 min. I≤0.01CV or 3(μ A), Whichever is greater. |      |      |      |      |        |
|                                       | C: 标称静电容量 (μF) Nominal Capacitance in μF<br>V: 额定工作电压 (V) Rated working voltage in V |  |                                                                                         |      |      |      |      |        |
| 损耗角正切值<br>Dissipation Factor          | 额定工作电压(V)<br>Rated working voltage                                                   |  | 6.3                                                                                     | 10   | 16   | 25   | 35   | 50~100 |
|                                       | DF(MAX)<br>(25℃,120Hz)                                                               |  | 0.30                                                                                    | 0.24 | 0.20 | 0.16 | 0.14 | 0.14   |


|                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------|---------|----|--------|-----------------------|-------------------------------|--------------------------|---------------------------|---|-------|-----------------------|----|--------|---------|-------------|-------|-----------------------|---|---|---|---|
| 浪涌电压<br>Surge Voltage                                                                                                                                                                                                                                                                                                                                                           | <table><tr><td>额定工作电压(V)<br/>Rated working voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>100</td></tr><tr><td>浪涌电压<br/>Surge voltage (V)</td><td>8</td><td>13</td><td>20</td><td>32</td><td>44</td><td>63</td><td>125</td></tr></table>                                                                                                                        | 额定工作电压(V)<br>Rated working voltage | 6.3            | 10      | 16 | 25     | 35                    | 50                            | 100                      | 浪涌电压<br>Surge voltage (V) | 8 | 13    | 20                    | 32 | 44     | 63      | 125         |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 额定工作电压(V)<br>Rated working voltage                                                                                                                                                                                                                                                                                                                                                                  | 6.3                                | 10             | 16      | 25 | 35     | 50                    | 100                           |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 浪涌电压<br>Surge voltage (V)                                                                                                                                                                                                                                                                                                                                                                           | 8                                  | 13             | 20      | 32 | 44     | 63                    | 125                           |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 施加表中所示浪涌电压，充电 30±5 秒，放电 5.5±0.5 分钟作为一个周期，共进行 1000 次。测试温度：15℃-35℃。然后在标准大气条件下放置达到热稳定，测试各参数。<br>Application of DC surge Voltage stated at table,1000 times of charging for 30±5 sec., discharging with a period of 5.5±0.5 min. Test temperature: 15℃-35℃ And the capacitor shall be stored under standard atmospheric conditions to obtain thermal stability, after which measurements shall be made. |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 容量变化：在初始值的±10%以内。<br>Capacitance change: Within ± 10% of the initial value                                                                                                                                                                                                                                                                                                                          |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 损耗角正切值不大于规定值。<br>Dissipation factor: Not more than the specified value.                                                                                                                                                                                                                                                                                                                             |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 漏电流：不大于规定值。<br>Leakage current: Not more than the specified value                                                                                                                                                                                                                                                                                                                                   |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 电容器根据下表的次序处理，放置在每一温度下，待阻抗或电容量稳定后方可测试。<br>The capacitor shall be subjected in turn to the procedures specified below. The capacitor should be stored at each temperature until measured impedance or capacitance are stabilized.                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | <table><tr><td>阶段 Step</td><td>温度 Temperature</td><td>时间 Time</td></tr><tr><td>1</td><td>20±2℃</td><td>热平衡状态 Thermal balance</td></tr><tr><td>2</td><td>下限类别温度 Lower temperature</td><td>2 hours</td></tr><tr><td>3</td><td>20±2℃</td><td>热平衡状态 Thermal balance</td></tr><tr><td>4</td><td>105±2℃</td><td>2 hours</td></tr><tr><td>5</td><td>20±2℃</td><td>热平衡状态 Thermal balance</td></tr></table>  | 阶段 Step                            | 温度 Temperature | 时间 Time | 1  | 20±2℃  | 热平衡状态 Thermal balance | 2                             | 下限类别温度 Lower temperature | 2 hours                   | 3 | 20±2℃ | 热平衡状态 Thermal balance | 4  | 105±2℃ | 2 hours | 5           | 20±2℃ | 热平衡状态 Thermal balance |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | 阶段 Step                                                                                                                                                                                                                                                                                                                                                                                             | 温度 Temperature                     | 时间 Time        |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 1                                                                                                                                                                                                                                                                                                                                                                               | 20±2℃                                                                                                                                                                                                                                                                                                                                                                                               | 热平衡状态 Thermal balance              |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 2                                                                                                                                                                                                                                                                                                                                                                               | 下限类别温度 Lower temperature                                                                                                                                                                                                                                                                                                                                                                            | 2 hours                            |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 3                                                                                                                                                                                                                                                                                                                                                                               | 20±2℃                                                                                                                                                                                                                                                                                                                                                                                               | 热平衡状态 Thermal balance              |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 4                                                                                                                                                                                                                                                                                                                                                                               | 105±2℃                                                                                                                                                                                                                                                                                                                                                                                              | 2 hours                            |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 5                                                                                                                                                                                                                                                                                                                                                                               | 20±2℃                                                                                                                                                                                                                                                                                                                                                                                               | 热平衡状态 Thermal balance              |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 阶段 1：测定容量，损耗和阻抗值。<br>Step 1: Capacitance, Dissipation Factor and impedance shall be measured.                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 阶段 2：放置 2 小时后，达到热平衡状态再测定容量，损耗和阻抗值。<br>Step 2: After the capacitor being stored for 2 hours, Capacitance, Dissipation Factor and impedance shall be Measured. The measurement shall be made at thermal stability.                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 阶段 4：放置 2 小时后，达到热平衡状态再测定容量，损耗和阻抗值。<br>Step 4: After the capacitor being stored for 2 hours, Capacitance, Dissipation Factor and impedance shall be Measured. The measurement shall be made at thermal stability.                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 阻抗比（阶段 2 对阶段 1）Impedance ratio                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| <table><tr><td>额定工作电压(V)<br/>Rated working voltage</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50~100</td></tr><tr><td>阻抗比(120Hz)<br/>Impedance Ratio</td><td>z-25℃/z+20℃</td><td>6</td><td>4</td><td>4</td><td>3</td><td>2</td><td>2</td></tr><tr><td></td><td>z-40℃/z+20℃</td><td>12</td><td>10</td><td>8</td><td>6</td><td>4</td><td>4</td></tr></table> | 额定工作电压(V)<br>Rated working voltage                                                                                                                                                                                                                                                                                                                                                                  | 6.3                                | 10             | 16      | 25 | 35     | 50~100                | 阻抗比(120Hz)<br>Impedance Ratio | z-25℃/z+20℃              | 6                         | 4 | 4     | 3                     | 2  | 2      |         | z-40℃/z+20℃ | 12    | 10                    | 8 | 6 | 4 | 4 |
| 额定工作电压(V)<br>Rated working voltage                                                                                                                                                                                                                                                                                                                                              | 6.3                                                                                                                                                                                                                                                                                                                                                                                                 | 10                                 | 16             | 25      | 35 | 50~100 |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 阻抗比(120Hz)<br>Impedance Ratio                                                                                                                                                                                                                                                                                                                                                   | z-25℃/z+20℃                                                                                                                                                                                                                                                                                                                                                                                         | 6                                  | 4              | 4       | 3  | 2      | 2                     |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
|                                                                                                                                                                                                                                                                                                                                                                                 | z-40℃/z+20℃                                                                                                                                                                                                                                                                                                                                                                                         | 12                                 | 10             | 8       | 6  | 4      | 4                     |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 静电容量变化率（阶段 4 对阶段 1）：阶段 1 的±20%<br>Capacitance change: within ±20% of step 1                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |
| 漏电流（阶段 4）：规定值 5 倍以下<br>Leakage Current: Less than 500% of the specified value.                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                     |                                    |                |         |    |        |                       |                               |                          |                           |   |       |                       |    |        |         |             |       |                       |   |   |   |   |

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>高温负荷特性<br/>Load life</p>         | <p>试验温度：105±2℃,施加额定电压和额定纹波电流<br/>试验时间：2000 小时<br/>Test temperature:105±2℃, Application of the rated voltage and the rated ripple current.<br/>Test time: 2000h</p> <p>外观：无异状<br/>Appearance: No remarkable abnormality<br/>容量变化：在初始值±30%范围内<br/>Capacitance change: Within ±30% of the initial value.<br/>损失角正切值：≤300%规定值<br/>Dissipation factor: ≤300% of the specified value<br/>漏电流：不大于规定值<br/>Leakage current: ≤specified value</p>                                                                                                                                                                                                                                             |
| <p>高温贮存特性<br/>Shelf life</p>        | <p>试验温度：105±2℃环境下无负荷贮存<br/>试验时间：1000 小时<br/>Test temperature: without voltage load at 105±2℃<br/>Test time : 1000h</p> <p>外观：无异状<br/>Appearance: No remarkable abnormality<br/>容量变化：在初始值±25%范围内<br/>Capacitance change: Within ±25% of the initial value.<br/>损失角正切值：≤200%规定值<br/>Dissipation factor: ≤200% of the specified value<br/>漏电流：≤200%规定值<br/>Leakage current: ≤200% of the specified value</p>                                                                                                                                                                                                                                                                           |
| <p>温度循环<br/>Temperature Cycling</p> | <p>试验温度：高温：上限类别温度、低温：下限类别温度；高低温暴露时间：各 30 分钟；<br/>转换时间：小于 1 分钟；循环次数：1000 次；试验结束后（24±4）小时内进行测试。<br/>Expose to the upper and lower category temperatures for 30 minutes each, with a transition time of less than 1 minute between high and low temperatures, and cycle 1000 times. The test shall be conducted within 24±4 hours after the end of the experiment.</p> <p>外观：无可见损伤和电解质漏出<br/>Appearance: No remarkable damage and electrolyte leakage<br/>容量变化：在初始值±20%范围内<br/>Capacitance change: Within ±20% of the initial value.<br/>损失角正切值：≤200% 规定值<br/>Dissipation factor: ≤200% of the specified value<br/>漏电流：≤200% 规定值<br/>Leakage current: ≤200% of the specified value</p> |

耐焊接热  
Resistance To Soldering Heat

回流焊温度曲线

Return to normal temperature and measure it after reflow in the condition

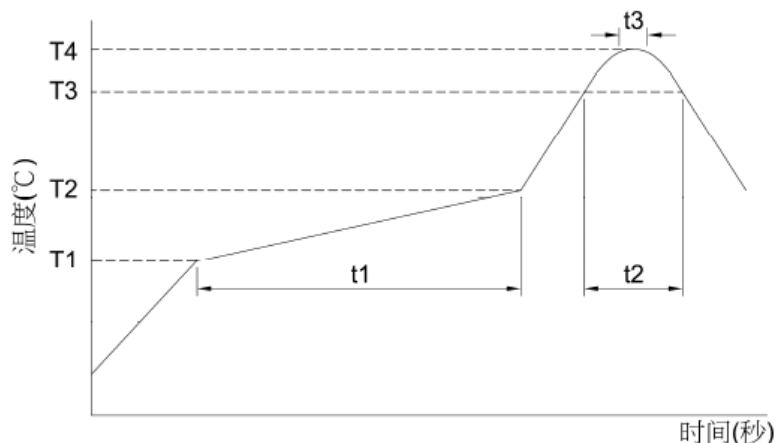

|          |         |       |     |       |       |     |       |
|----------|---------|-------|-----|-------|-------|-----|-------|
| 额定电压 V   | 4~50    | 4~50  |     | ≥63   | 4~100 |     | ≥160  |
| 尺寸 φ     | 4~6.3   | 4~6.3 |     | 4~6.3 | 8~10  |     | ≥12.5 |
| 温度 T1~T2 | 150~180 |       |     |       |       |     |       |
| 时间 t1, s | 120     | 100   |     |       |       |     |       |
| 温度 T3    | 230     | 217   | 230 | 217   | 217   | 230 | 217   |
| 时间 t2, s | 30      | 90    | 60  | 60    | 60    | 40  | 40    |
| 温度 T4    | 250     | 260   |     | 250   | 250   |     | 240   |
| 时间 t3, s | 5       |       |     |       |       |     |       |
| 回流次数     | 1       | ≤2    |     |       |       |     |       |

- 1) 电容表面温度不超过 T4(°C)
- 2) 电容器表面温度超过 200°C和 230°C的时间分别不得超过 t2 秒。
- 3) 预热应在 100°C~200°C之间进行，最长时间为 180 秒
- 1) Temperature at surface of capacitor shall not exceed T4(°C).
- 2) Period that temperature at surface of capacitor becomes more than 200°C and 230°C shall not exceed t2.
- 3)Preheat shall be made at 100°C~200°C and for maximum 180 seconds.

外观：无异状

Appearance: No remarkable abnormality

容量变化：在初始值±3%范围内

Capacitance change: Within ±3% of the initial value.

损失角正切值：不大于规定值

Dissipation factor: ≤ specified value

漏电流：不大于规定值

Leakage current: ≤specified value

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>耐溶剂性<br/>Solvent Resistance</p> | <p>三种溶剂：</p> <p>溶剂 a、在 20°C~30°C按下述配方构成混合溶剂：1）一份体积的分析纯异丙醇；2）三份体积的 80%体积的煤油和 20%体积的乙苯构成的混合液；</p> <p>溶剂 b、三氯三氟乙烷，半水溶性的溶剂；</p> <p>溶剂 c、在 63°C~70°C，按下述配方构成混合溶剂；1）42 份体积的去离子水；</p> <p>2）一份体积的乙二醇-丁醚；3）一份体积的单乙醇胺；</p> <p>将样品分成 3 组，分别浸在 a、b、c 三种溶剂 3min 后擦拭 10 次；擦拭后，立即按上述方法再重复 2 回，浸、刷共 3 回。然后用水洗清洗剂进行清洗，并在室温下对整个表面进行通风干燥。</p> <p>The solvent solutions used in this test shall consist of the following:</p> <p>Solvent a: A mixture consisting of the following at 20°C~30°C:</p> <p>1) One part by volume of isopropyl alcohol.</p> <p>2) Three parts by volume of a mixture of 80% by volume of kerosene and 20% by volume ethyl benzene.</p> <p>Solvent b: Trichlorotrifluoroethane, semi water-soluble solvents.</p> <p>Solvent c: A mixture consisting of the following at 63°C~70°C:</p> <p>1) Forty-two parts by volume of deionized water.</p> <p>2) One part by volume of ethylene glycol butyl ether.</p> <p>3) One part by volume of monoethanolamine.</p> <p>The specimens subjected to this test shall be divided into three groups of approximately equal size, were immersed in a, b, c three solvents solutions. The specimens shall be completely immersed for 3 minutes, immediately following immersing, each specimen shall be tested as follows: The bristle portion of the brush, shall be dipped in the solution until wetted and the specimen shall be brushed with normal hand pressure (approximately 2 to 3 ounce applied normal to the surface) for ten strokes on the portion of the specimen where has been applied. The brush stroke shall be directed in a forward direction across the surface of the specimen being tested. Immediately after brushing, the procedure shall be repeated two more times, for a total of three immersions, followed by brushing. After completion of the third immersion and brushing, the specimens shall be rinsed in approximately 25°C water and all surfaces sir-blown dry.</p> <p>外观：无异状<br/>Appearance: No remarkable abnormality</p> <p>容量变化：在初始值±3%范围内<br/>Capacitance change: Within ±3% of the initial value.</p> <p>损失角正切值：不大于规定值<br/>Dissipation factor: ≤ specified value</p> <p>漏电流：不大于规定值<br/>Leakage current: ≤ specified value</p> |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>可焊性<br/>Solderability</p>      | <p>焊锡温度: 255±5℃, 浸入时间: (5+0/-0.5)秒, 浸入和提出速率: (25±6)毫米/秒<br/>Solder Temperature: 255±5℃, Solder Immersion Time:(5+0/-0.5) sec. Solder Immersion / Emersion Rate: (25±6) mm/sec.</p> <p>浸入焊锡的引线表面积约 95%以上应附着新锡。<br/>At least 95% of circumferential surface of the dipping portion of terminal shall be covered with new solder.</p>                                                                                                                                                                                                                                                                              |
| <p>高温高湿<br/>Biased Humidity</p>   | <p>试验电压: 额定电压<br/>Test voltage: rated voltage<br/>试验温湿度: 85℃, 85%RH<br/>Test temperature and humidity : 85℃, 85%RH<br/>试验时间: 1000 小时<br/>Test time :1000 h<br/>试验结束后 24±4 小时后进行测试<br/>Measurement at 24±4 hours after test conclusion.</p> <p>外观: 绝缘套管的剥落、剥落、碎裂、起泡或收缩是可以接受的。<br/>Appearance: Peeling, flaking, chipping, bubbling or shrinking of insulation sleeve is acceptable.<br/>容量变化: 在初始值±20%范围内<br/>Capacitance change: Within ±20% of the initial value.<br/>损失角正切值: ≤150% 规定值<br/>Dissipation factor: ≤ 150% of specified value<br/>漏电流: ≤150%规定值<br/>Leakage current: ≤ 150% of specified value</p> |
| <p>端子强度<br/>Terminal Strength</p> | <p>将组件安装在带有待测试设备的 PCB 上, 向待测试设备侧面施加 17.7 N (1.8 Kg) 的力。应施加此力 60+1 秒。此外, 应逐渐施加力, 以免对被测部件造成冲击。<br/>With the component mounted on a PCB with the device to be tested, apply a 17.7 N (1.8 Kg) force to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to apply a shock to the component being tested.</p> <p>外观: 无可见机械损伤<br/>Appearance: no visible mechanical damage<br/>电容器应无接触不良开路或短路<br/>The capacitor shall be no intermittent contacts, or open or short circuiting</p>                                                  |

|                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>振动试验<br/>Resistance To Vibration</p>                                                        | <p>在 X、Y、Z 三个互相垂直的方向分别进行 12 个循环，共 36 个循环，一个循环 20 分钟。<br/>频率：10-2000Hz<br/>加速度：5g.<br/>Perform 12 cycles in X, Y, and Z directions perpendicular to each other, for a total of 36 cycles, each lasting 20 minutes.<br/>Vibration frequency range: 10-2000Hz<br/>Acceleration: 5g</p> <p>外观：无可见机械损伤<br/>Appearance: No visible mechanical damage<br/>容量变化：在初始值±3%范围内<br/>Capacitance change: Within ±3% of the initial value.<br/>损失角正切值：不大于规定值<br/>Dissipation factor: ≤ specified value<br/>漏电流：不大于规定值<br/>Leakage current: ≤ specified value</p>                                                                                |
| <p>机械冲击<br/>Mechanical Shock</p>                                                               | <p>脉冲波形：正半弦波；峰值加速度：100g；脉冲持续时间：6ms；三个轴六个向各 3 次，共 18 次，电容器的性能符合下面要求：<br/>Waveform: Half-sine, Peak value: 100g, Normal duration: 6ms Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). Capacitors meet the characteristics listed as below.</p> <p>外观：无可见机械损伤<br/>Appearance: No visible mechanical damage<br/>电容量变化率:±3%初始测量值以内<br/>Capacitance change: Within ±3% of the initial value.<br/>损耗角正切值≤规定值<br/>Dissipation factor: ≤specified value<br/>漏电流: ≤规定值<br/>Leakage current:≤ specified value</p>                                             |
| <p>可燃性<br/>(对绝缘底座进行试验)<br/>Flammability<br/>(Applicable to components having a resin case)</p> | <p>样品置于纸包松木板上方 200mm 处，用 12mm 针焰，每一试样引燃 3 次，分别引燃 10s、60s、120s。<br/>Place the sample 200 mm above the paper wrapped pine board and ignite it three times with a 12 mm needle flame, respectively for 10 seconds, 60 seconds, and 120 seconds.</p> <p>要求：第一次施加试验火焰后，试样不应完全燃尽，任一次施加试验火焰后，任何试样的燃烧持续时间应≤15s，薄垫纸应不被引燃，松木板应不被烤焦炭化。<br/>Requirement: After the first application of the test flame, the test specimens shall not be consumed completely. After any application of the test flame, the duration of the burning of any specimen shall not exceed 15s.The tissue paper shall not ignite and the board shall not scorch.</p> |

**◆尺寸表、允许纹波电流、纹波电流频率因子**

Dimensions and ripple current and frequency coefficient

**\* 纹波电流频率因子**

Ripple current frequency coefficient

| Freq (Hz)<br>Cap (μF) | 50 (60) | 100 (120) | 500  | 1K   | ≥10K |
|-----------------------|---------|-----------|------|------|------|
| 0.1~1                 | 0.50    | 1.00      | 1.20 | 1.30 | 1.50 |
| 2.2~4.7               | 0.65    | 1.00      | 1.20 | 1.30 | 1.50 |
| 10~68                 | 0.80    | 1.00      | 1.20 | 1.30 | 1.50 |
| 100~1000              | 0.80    | 1.00      | 1.10 | 1.15 | 1.20 |

**\* 尺寸表与允许纹波电流**

Dimensions and ripple current

| WV/V<br>Cap/μF | 6.3(LA)           |            | 10(LB)             |           | 16(LC)             |           | 25(LD)            |            | 35(LE)             |            | 50(LF)         |          |
|----------------|-------------------|------------|--------------------|-----------|--------------------|-----------|-------------------|------------|--------------------|------------|----------------|----------|
|                | (1)               | (2)        | (1)                | (2)       | (1)                | (2)       | (1)               | (2)        | (1)                | (2)        | (1)            | (2)      |
| 0.1            |                   |            |                    |           |                    |           |                   |            |                    |            | 4×5.5          | 1.0      |
| 0.22           |                   |            |                    |           |                    |           |                   |            |                    |            | 4×5.5          | 2.0      |
| 0.33           |                   |            |                    |           |                    |           |                   |            |                    |            | 4×5.5          | 2.5      |
| 0.47           |                   |            |                    |           |                    |           |                   |            |                    |            | 4×5.5          | 4.0      |
| 1              |                   |            |                    |           |                    |           |                   |            |                    |            | 4×5.5          | 8.0      |
| 2.2            |                   |            |                    |           |                    |           |                   |            | 4×5.5              | 7.5        | 4×5.5          | 11       |
| 3.3            |                   |            |                    |           |                    |           |                   |            | 4×5.5              | 9          | 4×5.5          | 13       |
| 4.7            |                   |            |                    |           |                    |           | 4×5.5             | 13         | 4×5.5              | 14         | 4×5.5<br>5×5.5 | 15<br>18 |
| 10             |                   |            |                    |           | 4×5.5              | 20        | 4×5.5<br>5×5.5    | 17<br>20   | 4×5.5<br>5×5.5     | 20<br>24   | 6.3×5.5        | 28       |
| 22             | 4×5.5             | 23         | 5×5.5              | 25        | 4×5.5<br>5×5.5     | 23<br>31  | 5×5.5<br>6.3×5.5  | 28<br>36   | 6.3×5.5            | 46         | 6.3×5.5        | 45       |
| 33             | 5×5.5             | 27         | 5×5.5              | 34        | 5×5.5<br>6.3×5.5   | 35<br>40  | 6.3×5.5           | 48         | 6.3×5.5            | 49         | 6.3×7.7        | 65       |
| 47             | 4×5.5<br>5×5.5    | 31<br>37   | 6.3×5.5            | 41        | 5×5.5<br>6.3×5.5   | 48<br>56  | 6.3×5.5           | 49         | 6.3×5.5<br>6.3×7.7 | 50<br>80   | 6.3×7.7        | 70       |
| 100            | 6.3×5.5           | 57         | 6.3×5.5            | 57        | 6.3×5.5<br>6.3×7.7 | 60<br>100 | 6.3×7.7           | 100        | 6.3×7.7<br>8×10.5  | 80<br>240  | 8×10.5         | 210      |
| 150            | 6.3×5.5           | 86         | 6.3×7.7            | 86        | 6.3×7.7            | 95        | 8×10.5            | 140        | 8×10.5             | 155        | 10×10.5        | 180      |
| 220            | 6.3×7.7           | 120        | 6.3×5.5<br>6.3×7.7 | 75<br>120 | 6.3×7.7            | 120       | 8×10.5            | 270        | 8×10.5<br>10×10.5  | 270<br>270 | 10×10.5        | 330      |
| 330            | 6.3×7.7<br>8×10.5 | 93<br>290  | 8×10.5             | 290       | 8×10.5             | 290       | 8×10.5            | 290        | 10×10.5            | 370        | 10×10.5        | 500      |
| 470            | 8×10.5            | 320        | 8×10.5             | 320       | 10×10.5            | 380       | 8×10.5<br>10×10.5 | 380<br>490 | 10×10.5            | 300        | 10×10.5        | 220      |
| 680            | 8×10.5            | 210        | 10×10.5            | 410       | 10×10.5            | 410       |                   |            |                    |            |                |          |
| 1000           | 8×10.5<br>10×10.5 | 230<br>410 | 10×10.5            | 410       |                    |           |                   |            |                    |            |                |          |

| WV/V<br>Cap/μF | 63V(LG) |     | 100V(MA) |     |
|----------------|---------|-----|----------|-----|
|                | (1)     | (2) | (1)      | (2) |
| 0.1            | 4×5.5   | 1.0 |          |     |
| 0.22           | 4×5.5   | 2.0 |          |     |
| 0.33           | 4×5.5   | 2.5 |          |     |
| 0.47           | 4×5.5   | 4.0 |          |     |
| 1              | 4×5.5   | 8.0 |          |     |
| 2.2            | 4×5.5   | 11  |          |     |
| 3.3            | 4×5.5   | 16  |          |     |
| 4.7            | 4×5.5   | 16  | 5×5.5    | 20  |
|                | 5×5.5   | 19  | 6.3×5.5  | 25  |
| 10             | 6.3×5.5 | 32  | 6.3×7.7  | 35  |
|                |         |     | 8×10.5   | 100 |
| 22             | 6.3×7.7 | 58  | 8×10.5   | 100 |
| 33             | 8×10.5  | 140 | 10×10.5  | 150 |
| 47             | 8×10.5  | 170 | 10×10.5  | 200 |
| 100            | 10×10.5 | 310 |          |     |

(1) 外形尺寸 Case Size D×L(mm)

(2) 最大允许纹波电流 Max allowable ripple current (mA rms +105°C, 120Hz)

#### ◆包装

Packaging

包装标签内容 Package label content

- |              |                       |            |                                |
|--------------|-----------------------|------------|--------------------------------|
| 1) 客户物料号 P/N | Customer Material P/N | 6) 容量偏差    | Tolerance on Rated Capacitance |
| 2) 风华物料号 P/N | FENGHUA Material P/N  | 7) 规格尺寸    | Specification                  |
| 3) 批号        | Lot number            | 8) 日期      | Date                           |
| 4) 数量        | Quantity              | 9) RoHS 标识 | RoHS                           |
| 5) 系列        | Series                | 10) 二维码    | QR code                        |

其中批号的填写 Lot number

1
2
3
4
5
6
7
8
9
10
11
12
13
14

类别 年份 月份 日期 区别号


流传单号码

Sort Year Month Date Discriminate mark


Sequence number

\* 编带产品按下图包装方式

Taped capacitors are packed into carton, according to the following drawing

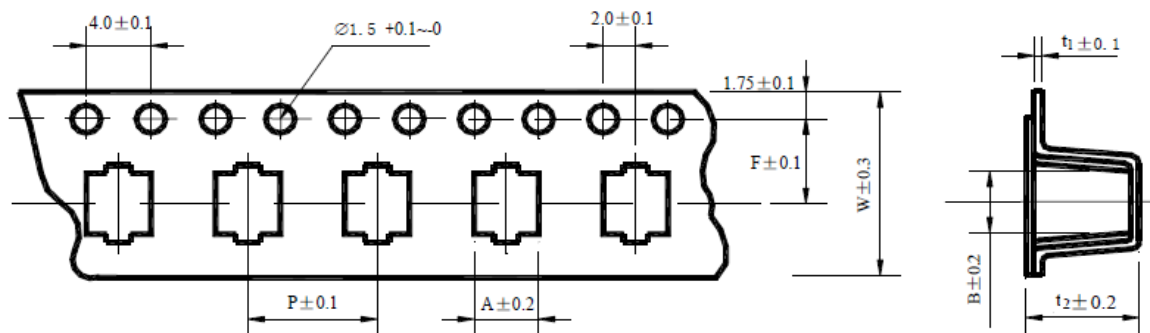

Reel:

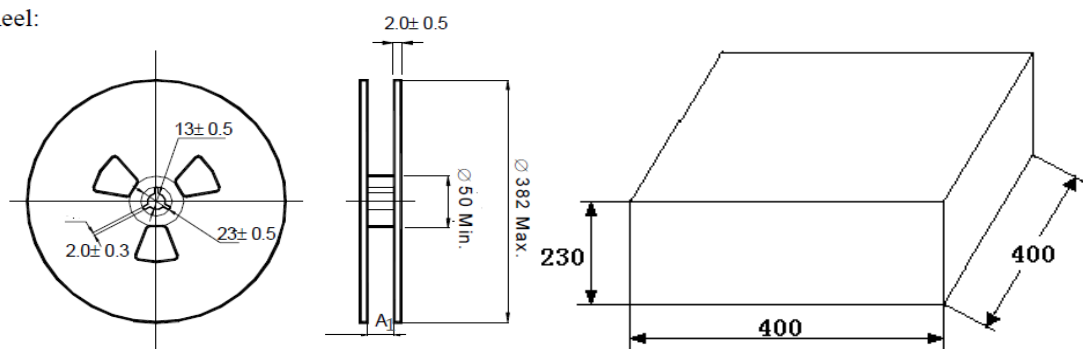

| 系列<br>Series | 尺寸 Size  | W    | A    | B    | P  | t <sub>2</sub> | F    | t <sub>1</sub> |
|--------------|----------|------|------|------|----|----------------|------|----------------|
| AMT          | Φ4×5.5   | 12.0 | 4.7  | 4.7  | 8  | 5.7            | 5.5  | 0.4            |
|              | Φ5×5.5   | 12.0 | 5.7  | 5.7  | 12 | 5.7            | 5.5  | 0.4            |
|              | Φ6.3×5.5 | 16.0 | 7.0  | 7.0  | 12 | 5.7            | 7.5  | 0.4            |
|              | Φ6.3×7.7 | 16.0 | 7.0  | 7.0  | 12 | 8.3            | 7.5  | 0.4            |
|              | Φ8×10.5  | 24.0 | 8.7  | 8.7  | 16 | 11.0           | 11.5 | 0.4            |
|              | Φ10×10.5 | 24.0 | 10.7 | 10.7 | 16 | 11.0           | 11.5 | 0.4            |

| 垂直安装 Vertical Mount |                |                  |
|---------------------|----------------|------------------|
| 尺寸 Size             | A <sub>1</sub> | 数量 Quantity/reel |
| Φ4×5.5              | 14             | 2000pcs          |
| Φ5×5.5              | 14             | 1000pcs          |
| Φ6.3×5.5            | 18             | 1000pcs          |
| Φ6.3×7.7            | 18             | 1000pcs          |
| Φ8×10.5             | 26             | 500pcs           |
| Φ10×10.5            | 26             | 400pcs           |

### ◆贮存方法 Storage Methods

\* 请保管在室温 5℃~35℃，湿度 75%RH 以下的环境

\* (1)产品储存期限：≤12 个月；

\* (2)产品储存期限超 12 个月时，需充电后再使用

\* (3)产品储存时间超过 3 年的应报废处理

\* (4)库存有效期以套管上印刷的时间开始计算

\* (5)请尽量以包装状态保管

\* (6)避免在下列环境中保管

① 溅水、高温高湿及结露的环境;

② 溅油、或者充满气体油成分的环境;

③ 充满酸性有毒气体（硫化氢、亚硫酸、亚硝酸、氯、溴、溴化甲烷等）的环境;

\* We recommend the following conditions for storage:

Ambient temperature: 5℃~35℃, Ambient humidity: Less than 75% RH.

\* (1) Storage life: ≤12 months;

\* (2) If storage life time is over 12 months, the products need to be recharged;

- \* (3) If storage life time is over three years, the products need to be discarded;
- \* (4) Expiry date: calculating from the date marked on the sleeve;
- \* (5) Please keep capacitors in the original package;
- \* (6) Avoid storing the capacitors under such circumstances:
  - ① Environment of water splashing, high temperature, high humidity and dewing;
  - ② The environment that splashes oil, or is filled with gas oil;
  - ③ With full of acid toxic gases environment such as( hydrogen sulfide , sulfurous acid, nitrous acid, chlorine , bromine, methyl bromide, etc.

### ◆ 铝电解电容器使用注意事项

#### Precautions for using aluminum electrolytic capacitors

- \* (1) 直流铝电解电容器应按正确的极性使用  
当直流铝电解电容器被反极性接入电路时，电容器会导致电子线路短路，由此产生的电流会引致电容器损坏。若电路中有可能在负引线施加正极电压，请选用无极性产品
- \* (2) 在额定工作电压以下作用  
当电容器上所施加电压高于额定工作电压时，电容器的漏电流将上升，其电气特性将在短小时内劣化直至损坏。注意电压峰值请勿超出额定工作电压
- \* (3) 常规产品禁止作快速充放电使用  
当常规电容器被用作快速充电用途。其使用寿命可能会因为容量下降，温度急剧上升等而缩减。
- \* (4) 施加纹波电流应小于额定值  
施加纹波电流超过额定值后，会导致电容器体过热，容量下降，寿命缩短。所施加纹波电压的峰值应小于额定工作电压。
- \* (5) 使用环境温度  
铝电解电容器的使用寿命会受到环境温度的影响。据科学统计，使用环境温度下降 10℃其使用寿命增加 1 倍。
- \* (6) 引出线强度  
当拉力施加到电容器引出线，该拉力将作用于电容器内部，这将导致电容器内部短路，开路或漏电流上升。在电容器焊装到电路板，请勿强烈摇动电容器。
- \* (7) 焊接过程耐热性  
铝电解电容器装至电路板进行浸焊或波峰焊时，其塑料套管可能因焊接时间过长、温度过高而发生破裂或二次收缩。
- \* (8) 电路板的安装孔距及安装位置  
电路板安装孔的设计应与产品说明书的引线脚距一致，如果将电容器强行插入孔距不配套的电路板，那么会有应力作用于引出线，这将导致短路或漏电流上升。
- \* (9) 铝电解电容可能会有残留电压，请在使用前对电容器进行放电。

#### (1) DC aluminum electrolytic capacitors should be used according to the correct polarity

When a DC aluminum electrolytic capacitor is connected to a circuit with reverse polarity, the capacitor will cause a short circuit in the electronic circuit, and the resulting current will cause damage to the capacitor. If it is possible to apply positive voltage to the negative lead in the circuit, please choose a non-polar product.

(2) Function below rated operating voltage

When capacitor is used at higher voltage than the rated voltage, leakage current increases, characteristics drastically deteriorate and damage in a short period may occur as a result. Please take extra caution that the peak voltage should not exceed the rated voltage.

(3) Conventional capacitors are prohibited from being used for fast charging and discharging

When aluminum electrolytic capacitors for general purpose are employed in rapid charge and discharge application, its life may be shorted by capacitance decreasing, heat rising, etc.

(4) The applied ripple current should be less than the rated value

Excessive heat will reduce capacitance and result in shortened life of capacitor if ripple currents exceeding the specified rated value are applied. The peak value of the ripple voltage should be less than the rated voltage.

(5) Operating ambient temperature

Its ambient temperature closely affects the life of an aluminum electrolytic capacitor. It is generally stated, that life doubles for each 10°C decrease in temperature.

(6) Terminal Strength

When a strong force is applied to the lead wires or terminals, stress is put on the internal connections. This may result in short circuit, open circuit or increased leakage current. It is not advisable to bend or handle a capacitor after it has been soldered to the PCB board.

(7) Heat resistance during welding process

In the dip soldering process of PCB board with aluminum electrolytic capacitors mounted, secondary shrinkage or crack of PVC sleeve may be observed when solder temperature is too high or dipping time is too long.


(8) Installation pitch-row and installation position of circuit boards

PCB board must be designed so its hole coincides with the lead pitch (lead spacing) of the capacitor specified by the catalog or specifications. When a capacitor is forcibly inserted into an unmatched hole, a stress is put on the leads. This could result in a short circuit or increased leakage current.

(9) Aluminum electrolytic capacitors may have residual voltage, please discharge the capacitor before use.

**◆推荐安装/焊接方法 Recommended Installation/Welding Methods**
**(1) 焊接方法之适用性**

| 焊接方法 | 回流焊 | 铬铁 | 波峰焊 |
|------|-----|----|-----|
| 可行性  | 可行  | 可行 | 不可行 |

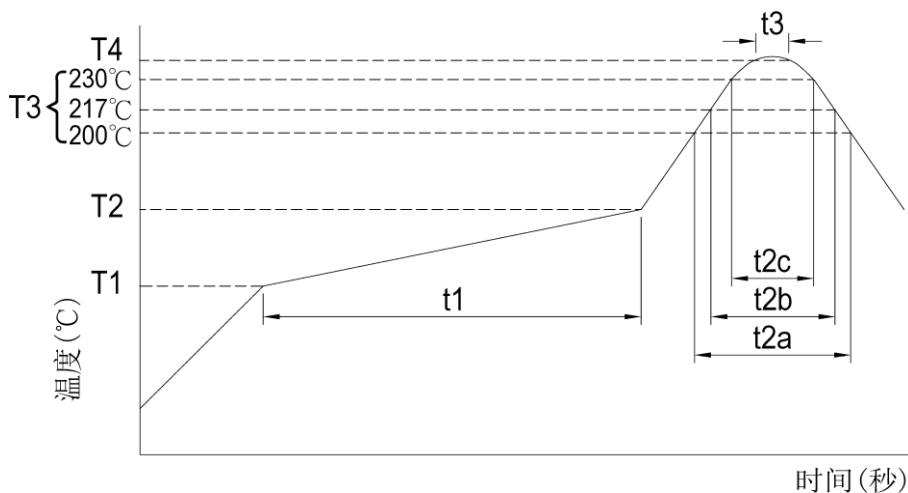**(2) 无铅回流焊使用条件**

**(3) 测试条件**

| 制品别     |                     | 非固态电容器             |         |         |         |        |     |     | 高分子固态电<br>容器 |     | 高分子固液混<br>合电容器 |     |     |
|---------|---------------------|--------------------|---------|---------|---------|--------|-----|-----|--------------|-----|----------------|-----|-----|
| 额定电压(V) |                     | 4 ~ 50             | 4 ~ 50  | ≥ 63    | 4 ~ 100 | ≥ 160  |     |     | ---          |     | ---            |     |     |
| 制品尺寸(φ) |                     | 4 ~ 6.3φ<br>× 4.5L | 4 ~ 6.3 | 4 ~ 6.3 | 8 ~ 18  | ≥ 12.5 |     |     | ---          |     | ---            |     |     |
| 预热      | 温度<br>(T1 ~ T2, °C) | 150 ~ 180          |         |         |         |        |     |     | 150 ~ 200    |     | 150 ~ 180      |     |     |
|         | 时间(t1)<br>(最大, 秒)   | 120                | 180     |         |         |        |     | 180 |              | 120 |                |     |     |
| 持续时间    | 温度<br>(T3, °C)      | 230                | 217     | 230     | 217     | 217    | 230 | 217 | 217          | 230 | 200            | 217 | 280 |
|         | 时间(t2)<br>(最大, 秒)   | t2c                | t2b     | t2c     | t2b     | t2b    | t2c | t2b | t2b          | t2c | t2a            | t2b | t2c |
|         |                     | 30                 | 90      | 60      | 60      | 60     | 30  | 90  | 70           | 60  | 70             | 50  | 40  |
| 最高温度    | 温度<br>(T4, °C)      | 250                | 260*    |         | 250     | 250    |     | 240 | 250          | 260 | 250            |     | 260 |
|         | 时间<br>(t3, 秒)       | 5                  |         |         |         |        |     |     | 5            |     | 5              |     |     |
| 回流次数    |                     | 1                  | ≤ 2     |         |         |        |     | 2   |              | 1   | 2              |     | 1   |

- ① 如使用条件较上表所列为高时, 请与我们联系。
- ② 在执行第 2 次回流焊时, 请确认电容器之温度已冷却至 5 ~ 35°C。

**(4) OP-CAP 回流焊注意事项**

回流焊会降低制品额定静电容量, 应确认回流焊条件是否满足建议回流焊之规范。

虽然实际的回流焊条件变更仍依据回各项回流焊焊接方法, 请注意制品铝壳底部之最高温度及电极端子不可超过最高温度。

请特别注意: OP-CAP 制品在回流焊加热过程之温度应提高至 200°C 以上。

若回流焊条件(温度或持续时间)大于上表所列, 则 OP-CAP 制品会受损: 制品静电容量降低约 50%、漏电流变大(上升至数毫安/mA), 以及损坏电容器外部。

◆ 其它说明 OTHERS

\*本产品不含铅、镉等元素

This product does not include Plumbum or Cadmium.

注：上述所提供之内容为产品规格说明。在产品未变更时，风华保有修改此内容不另行通知之所有权利，任何产品变更将会以 P C N 通知客户。