


## ■片式分流电阻器

### Chip Shunt Resistor

#### ◆特点

#### Features

- \* 2512 最高功率达 6W  
2512 High power up to 6W;
- \* 3921 最高功率达 9W  
3921 High power up to 9W;
- \* 5931 最高功率达 15W  
5931 High power up to 15W;
- \* 适应再流焊  
Suit for re-flow solder;
- \* 符合 ROHS 指令要求  
Compliant with RoHS directive.



#### ◆应用领域

#### Application


开关电源、过电流保护、电压调节器、电源转换器、充电器、便携式设备等。

Switching Power Supply、Over Current Protection、Voltage Regulation Module(VRM)、DC-DC Converter、Charger、Portable Devices etc.


#### ◆型号表示法

#### Part Number


MS	V	3921	K	R001	F	T					
↓	↓	↓	↓	↓	↓	↓					
产品代号 Product Code	额定功率代号 Power Rating Code		型号代号 Type Code		电阻温度系数代号 T.C.R Code	电阻值代号 Resistance Value Code	阻值误差精度代号 Resistance Tolerance Code	包装方式代号 Packing Style Code			
片式分流 电阻器 Chip Shunt Resistor	代号 Code	额定功率系列 Power Rating	代号 Code	型号 Type	代号 Code	T.C.R PPM/℃	单位Ω，小数点用 R 表示；单位 mΩ，小数点用 M 表示； Units:Ω Decimal point should be expressed by "R"; Units : mΩ Decimal point should be expressed by 'M' 例如 Example: R001=0.001Ω R004=0.004Ω 0M20=0.20mΩ 0M50=0.50mΩ	代号 Code	误差精度 Tolerance	代号 Code	包装方法 Packing Style
	N	3W	12	2512	H	±50		F	±1%	T	编带包装 Tape & Reel
	U	4W			X	±75					
	V	5W			K	±100					
	W	6W	3921	3921	J	±150		G	±2%	C	塑料袋散装 Case
	Z	7W			W	±200					
	A	8W			L	±250					
	I	9W	5931	5931				J	±5%		
	B	10W									
	C	15W									

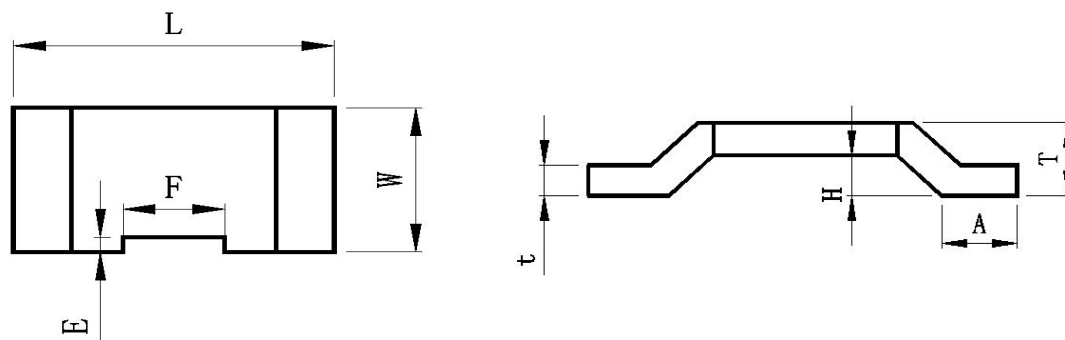**◆结构 Construction**


\*2512 0.2mΩ/5931 0.1mΩ侧面示意图:

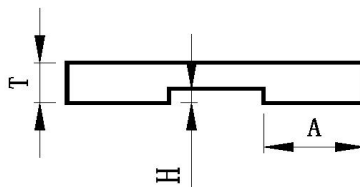
**◆规格尺寸 Dimensions**

型号 Type	电阻值 (mΩ) Resistance Value	电阻 材料 Material	t (mm)	L (mm)	W (mm)	H (mm)	T (mm)	A (mm)	F (mm)	E (mm)
3921	0.2	MnCu	1.70±0.10	10.00 ±0.25	5.20 ±0.20	0.50 ±0.20	2.20±0.20	2.00±0.20	4.50±0.50	max. 1
	0.3		1.28±0.10				1.78±0.20			
	0.4		1.00±0.10				1.50±0.20			
	0.5		0.80±0.10				1.30±0.20			
	0.7		0.55±0.10				1.05±0.20			
	0.8	0.48±0.10	0.98±0.20							
	1	FeCrAl	1.25±0.10				1.75±0.20			
	2		0.62±0.10				1.12±0.20			
	3		0.42±0.10				0.92±0.20			
	4		0.35±0.10				0.85±0.20			
	5		0.28±0.10				0.78±0.20			
5931	0.1	MnCu	/	15.00 ±0.25	7.70 ±0.20	1.00±0.30	2.50±0.20	5.50±0.20	4.00±0.50	
	0.2		1.50±0.10			0.50 ±0.20	2.00±0.20	4.20±0.20	5.00±0.50	
	0.3		0.96±0.10				1.46±0.20			
	0.4		0.72±0.10				1.22±0.20			
	0.5		0.58±0.10				1.08±0.20			
	0.7		0.42±0.10				0.92±0.20			
	0.75		0.39±0.10				0.89±0.20			
	0.8		0.36±0.10				0.86±0.20			
	1	FeCrAl	0.94±0.10				1.44±0.20			
	2		0.48±0.10				0.98±0.20			
	3		0.31±0.10				0.81±0.20			
2512	0.2		MnCu	/	6.40 ±0.25		3.20 ±0.20			
	0.3	0.95±0.10		1.45±0.20		1.20±0.20		3.00 ±0.50		
	0.35	0.80±0.10		1.30±0.20						
	0.4	0.88±0.10		1.38±0.20						
	0.5	0.85±0.10		1.35±0.20						
	0.7	0.60±0.10		1.10±0.20						
	0.75	0.56±0.10		1.06±0.20						
	1	0.42±0.10		0.92±0.20						
	2	FeCrAl	0.67±0.10	1.17±0.20						
	3		0.45±0.10	0.95±0.20						
	4		0.32±0.10	0.82±0.20						
	5		0.32±0.10	0.82±0.20						

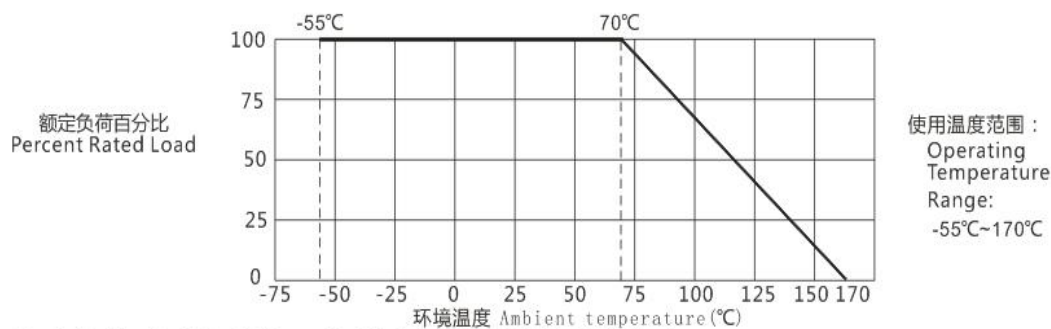**◆产品特性曲线图 Product Characteristic Curve**


注：当电阻使用的环境温度超过70°C时，其额定负荷(额定功率)按上述曲线下降。

Note: For resistors operated in ambient over 70°C, rated load (rated power) shall be derated in accordance with the above figure.

**◆额定值 Ratings**


型号 Type	额定功率(70℃) Power Rating	电阻值 Resistance Value	TCR (PPM/°C)	使用温度范围 Operating Temp. Range
3921	5W - 9W	0.2mΩ	± 200	-55℃ ~ +170℃
		0.3mΩ、0.4mΩ、0.5mΩ	± 150	
	5W - 7W	0.7mΩ、0.8mΩ		
		1mΩ		
	5W - 6W	2m Ω、3mΩ	± 75	
	3W - 4W	4 mΩ、5mΩ		
5931	7W - 15W	0.1 mΩ、0.2 mΩ	± 200	
	7W - 10W	0.3 mΩ		
	7W - 9W	0.4mΩ		
		0.5mΩ		
		0.7mΩ、0.75mΩ、0.8mΩ	± 100	
		1mΩ	± 75	
	7W	2mΩ、3mΩ		
	2512	3W - 6W	0.2 mΩ、0.3mΩ、0.35mΩ、0.4mΩ	± 200
0.5mΩ、0.7mΩ、0.75mΩ、1mΩ			± 150	
3W - 5W		2mΩ	±75	
3W - 4W		2.5mΩ、3mΩ		
3W		4 mΩ、5mΩ		

**◆特性 Characteristics**


项目 Item	标 准 Specifications	测试方法 Test Methods
电阻温度系数 T.C.R	在规定值内 Within specified T.C.R	IEC 60115-1 4.8 +20℃/+125℃/+20℃
短时过负载 Short time overload	无可见损伤 No mechanical damage $\Delta R \leq \pm 1.0\%R$	IEC 60115-1 4.13: 2.5 倍额定功率, 保持 5 秒。 Rated Power $\times$ 2.5 for 5 s.
可焊性 Solderability	可焊面积 $\geq 95\%$ 95% Cover Min	IEC 60115-1 4.17 245℃ $\pm$ 5℃锡槽, 保持 3s $\pm$ 0.3s。 Lead-free solder bath at 245℃ $\pm$ 5℃ for 3s $\pm$ 0.3s.
耐焊接热 Resistance to Soldering Heat	无可见损伤 No mechanical damage $\Delta R \leq \pm 1.0\%R$	IEC 60115-1 4.18 270℃ $\pm$ 5℃, 保持 10s $\pm$ 1s。 Lead-free solder bath at 270℃ $\pm$ 5℃ for 10s $\pm$ 1s.
工作寿命 Operational Life	无可见损伤 No mechanical damage $\Delta R \leq \pm 1.0\%R$	AEC-Q200 Test 8/ MIL-STD-202 Method 108/IEC 60115-1 4.25.1 70℃ $\pm$ 2℃, 1000 小时, 额定电流或元件极限电流 (取较小值), 通 1.5 小时/断 0.5 小时。 70℃ $\pm$ 2℃, 1000h, rated current or limiting element current whichever is lower for 1.5h ON/0.5h OFF.
高温高湿 Biased Humidity	无可见损伤 No mechanical damage $\Delta R \leq \pm 1.0\%R$	AEC-Q200 Test 7/MIL-STD-202 Method 103 温度 85℃, 湿度 85%RH 的条件下施加 10%额定功率 (电流) 或元件极限电流 (取较小值), 持续 1000 小时。 85℃/85%RH. 1000 h, Apply 10% of operating power(current) or limiting element current whichever is lower.
热冲击 Thermal Shock	无可见损伤 No mechanical damage $\Delta R \leq \pm 1.0\%R$	AEC-Q200 Test 16/MIL-STD-202 Method 107 -55℃ (15 分钟) $\sim$ 常温 ( $\leq 20$ 秒) $\sim$ 155℃ (15 分钟), 300 个循环。 -55℃ (15min) $\sim$ normal temperature ( $\leq 20$ s) $\sim$ 155℃ (15min), 300 cycles.
上限类别温度耐久性 Endurance at Upper Category temperature	无可见损伤 No mechanical damage $\Delta R \leq \pm 1.0\%R$	AEC-Q200 Test 3/MIL-STD-202 method 108 /IEC 60115-1 4.25.3 170℃ $\pm$ 2℃, 1000h

**◆ 包装 Packaging**

\*2512 型号载带图示:

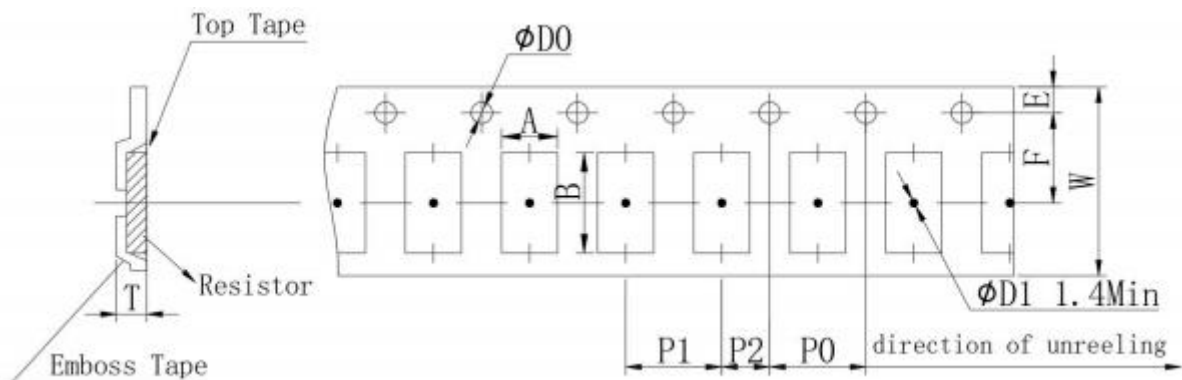


\*3921/5931 型号载带图示：

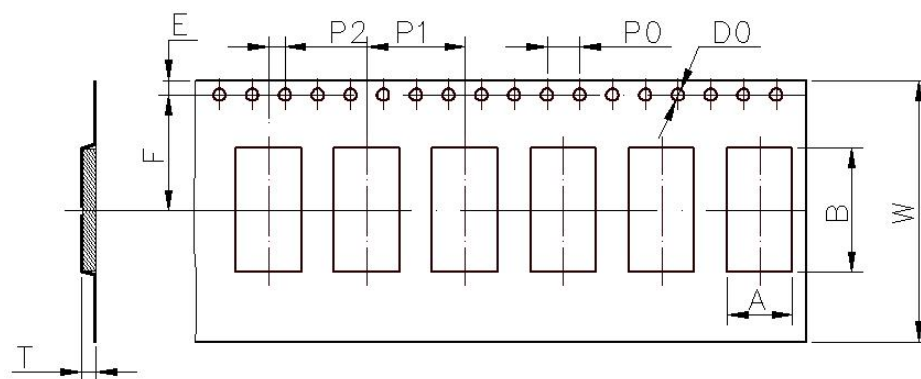

单位：Unit: mm

Type	A	B	W	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	ØD <sub>1</sub>	T	Quantity (EA)
2512	3.5±0.1	6.8±0.1	16.0±0.1	1.75±0.10	7.5±0.1	4.0±0.1	8.0±0.1	2.0±0.1	1.50±0.10	1.8±0.1	4000
3921	5.7±0.1	11.2±0.1	24.0±0.1	1.75±0.10	7.5±0.1	4.0±0.1	12.0±0.1	2.0±0.1	1.50±0.10	2.5±0.1	2000
5931	8.2±0.1	16.1±0.1	32.0±0.1	1.75±0.10	11.5±0.1	4.0±0.1	12.0±0.1	2.0±0.1	1.50±0.10	2.5±0.1	2000

●推荐焊盘尺寸 Solder pad dimensions

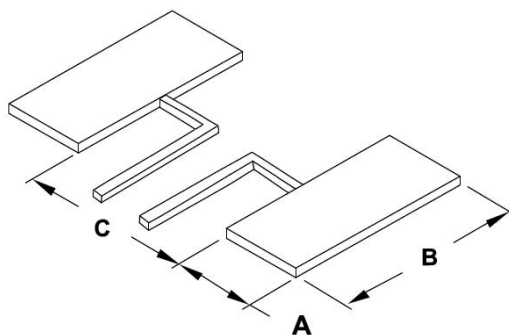


型号 Type	A(mm)	B(mm)	C(mm)
2512	1.80±0.25	3.60±0.25	3.80±0.25
3921	2.70±0.25	6.20±0.25	5.60±0.25
5931	5.20±0.25	8.75±0.25	5.60±0.25
5931 (0M10)	3.60±0.25	8.75±0.25	6.20±0.25

## 附录 Appendix I

### ■ 推荐焊盘尺寸 Recommend Solder Pad Size


#### ● 片式固定电阻器 Chip fixed resistor

单位 unit: mm



厚膜电阻及薄膜电阻 Thick Film Resistor and Thin Film Resistor			
型号 Type	A	B	C
01005	0.17±0.03	0.60±0.03	0.22±0.03
0201	0.23±0.05	0.84±0.05	0.38±0.05
0402	0.45±0.05	1.45±0.05	0.60±0.05
0603	0.80±0.05	2.50±0.05	0.95±0.05
0805	1.05±0.1	3.25±0.1	1.40±0.1
1206	1.90±0.1	4.50±0.1	1.75±0.1
1210	2.00±0.1	4.60±0.1	2.70±0.1
2010	3.50±0.1	6.50±0.1	2.70±0.1
2512(1W、1.5W)	4.80±0.1	7.80±0.1	3.40±0.1
2512(2W)	2.70±0.1	7.80±0.1	3.60±0.1
0508	0.60±0.1	2.20±0.1	2.00±0.1
0612	0.60±0.1	2.90±0.1	3.30±0.1
1225	1.40±0.1	4.50±0.1	6.40±0.1

#### ● 厚膜片式网络电阻器 Thick film chip network resistor

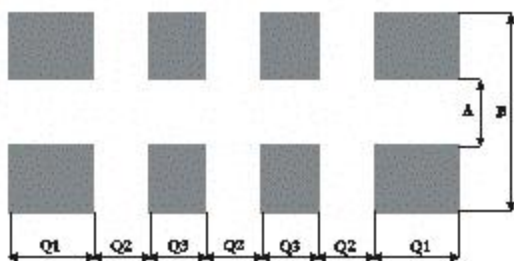

单位 unit: mm


型号 Type	A	B	Q1	Q2	Q3
2R01	0.30±0.05	0.90±0.05	0.30±0.05	0.20±0.05	---
4R01	0.30±0.05	0.90±0.05	0.20±0.05	0.20±0.05	0.20±0.05
2R02	0.35±0.05	1.25±0.05	0.65±0.05	0.20±0.05	0.30±0.05
4R02	0.38±0.05	1.60±0.05	0.40±0.05	0.20±0.05	---
4R03	0.80±0.05	2.70±0.05	0.60±0.05	0.40±0.05	0.40±0.05
备注 Remarks	1、2R01 型号包含 including:RC-MYO4、RCMY04、RH-MY04、RHMY04 2、4R01 型号包含 including:RC-MY08、RCMY08、RH-MY08、RHMY08 3、2R02 型号包含 including:RC-MT04、RCMT04、RH-MT04、RHMT04 4、4R02 型号包含 including:RC-MT08、RCMT08、RH-MT08、RHMT08 5、4R03 型号包含 including:RC-ML08、RCML08、RH-ML08、RHML08 6、上述型号说明适用于附录中所有型号。 The above description applies to all types in the appendix.				

## ■ 包装 Packaging

### \* 纸带编带 Paper Taping

适用于 01005、0201、0402、2R01、4R01、2R02、4R02:

For 01005、0201、0402、2R01、4R01、2R02、4R02:

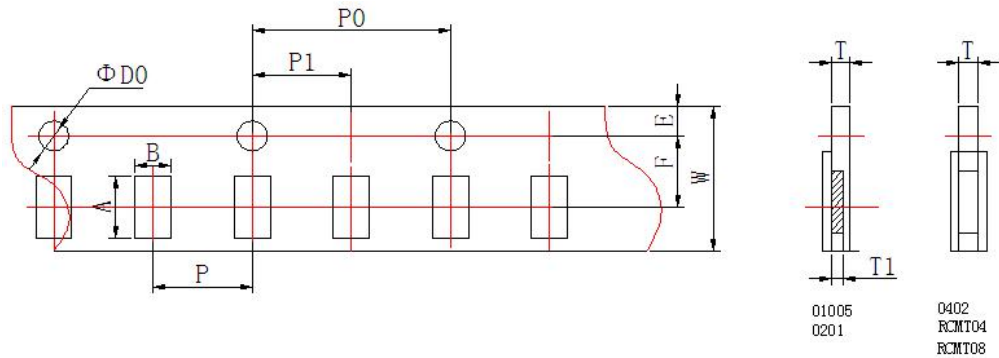

单位 unit: mm


型号 Type	A	B	W	F	E
01005	0.45±0.02	0.25±0.02	8.00±0.02	3.50±0.05	1.75±0.05
0201	0.70±0.10	0.40±0.10	8.00±0.20	3.50±0.05	1.75±0.10
0402	1.15±0.10	0.65±0.10	8.00±0.20	3.50±0.05	1.75±0.10
2R01	0.97±0.05	0.77±0.05	8.00±0.20	3.50±0.05	1.75±0.10
4R01	1.57±0.05	0.77±0.05	8.00±0.20	3.50±0.05	1.75±0.10
2R02	1.45±0.10	1.20±0.10	8.00±0.20	3.50±0.05	1.75±0.10
4R02	2.20±0.10	1.20±0.10	8.00±0.20	3.50±0.05	1.75±0.10

单位 unit: mm

型号 Type	P	P0	P1	ΦD0	T1	T
01005	2.00±0.05	4.00±0.10	2.00±0.05	1.55±0.02	0.17±0.02	0.31±0.02
0201	2.00±0.05	4.00±0.10	2.00±0.05	1.50±0.10	0.28±0.04	0.42±0.05
0402	2.00±0.05	4.00±0.10	2.00±0.05	1.50±0.10	/	0.44±0.05
2R01	2.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	/	0.60±0.10
4R01	2.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	/	0.60±0.10
2R02	2.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	/	0.60±0.10
4R02	2.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	/	0.60±0.10

适用于 0603、0805、0508、1206、0612、1210、4R03:

For 0603、0805、0508、1206、0612、1210、4R03:

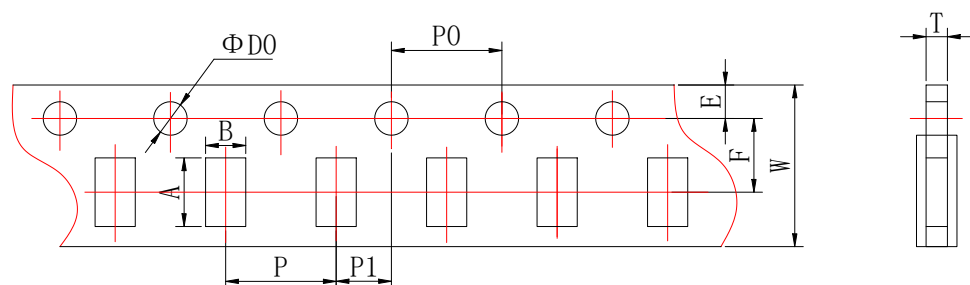

单位 unit: mm

型号 Type	A	B	W	F	E
0603	1.80±0.10	1.05±0.10	8.00±0.20	3.50±0.05	1.75±0.10
0805	2.30±0.10	1.50±0.10	8.00±0.20	3.50±0.05	1.75±0.10
0508	2.30±0.10	1.50±0.10	8.00±0.20	3.50±0.05	1.75±0.10
1206	3.50±0.20	1.90±0.20	8.00±0.20	3.50±0.05	1.75±0.10
0612	3.50±0.20	1.90±0.20	8.00±0.20	3.50±0.05	1.75±0.10
1210	3.50±0.20	2.80±0.20	8.00±0.20	3.50±0.05	1.75±0.10
4R03	3.50±0.20	1.90±0.20	8.00±0.20	3.50 ± 0.05	1.75±0.10


单位 unit: mm

型号 Type	P	P0	P1	ΦD0	T	
					厚膜电阻及薄膜电阻 Thick Film Resistor and Thin Film Resistor	合金片式固定 电阻 Metal Foil resistor
0603	4.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	0.60±0.10	0.75±0.10
0805	4.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	0.75±0.10	0.95±0.10
0508	4.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	0.75±0.10	0.95±0.10
1206	4.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	0.75±0.10	0.95±0.10
0612	4.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	0.75±0.10	0.95±0.10
1210	4.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	0.75±0.10	---
4R03	4.00±0.10	4.00±0.10	2.00±0.05	1.50±0.10	0.75±0.10	---

## \* 塑料带编带 Embossed Taping

适用于 2010、2512、1225:

For 2010、2512、1225:

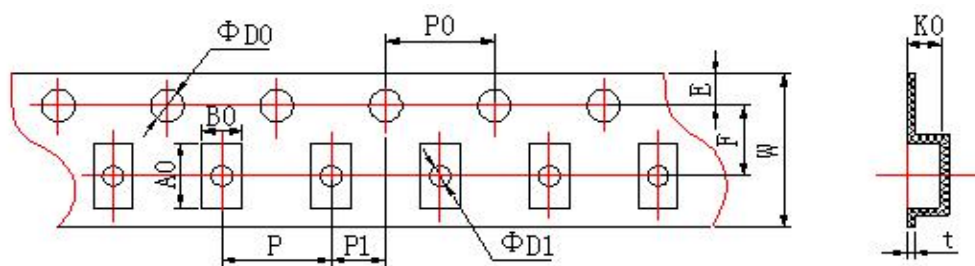

单位 unit: mm


型号 Type	A0	B0	W	F	E	t
2010	5.50±0.15	2.82±0.15	12.00±0.10	5.50±0.10	1.75±0.10	0.25±0.05
2512	6.78±0.15	3.45±0.15	12.00±0.10	5.50±0.10	1.75±0.10	0.25±0.05
1225	6.78±0.15	3.45±0.15	12.00±0.10	5.50±0.10	1.75±0.10	0.25±0.05



单位 unit: mm

型号 Type	P	P0	P1	ΦD0	ΦD1	K0	
						厚膜电阻及薄膜电阻 Thick Film Resistor and Thin Film Resistor	合金片式固定电阻 Metal Foil resistor
2010	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.10/-0	1.50±0.10	0.84±0.10	0.84±0.10
2512	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.10/-0	1.50±0.10	0.81±0.10	1.00±0.10
1225	4.00±0.10	4.00±0.10	2.00±0.05	1.50+0.10/-0	1.50±0.10	0.81±0.10	1.00±0.10

\* 卷盘 Reel

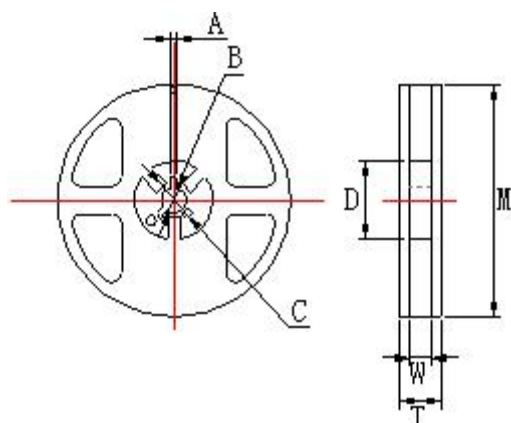

单位 unit: mm

卷盘尺寸 Reel Type	型号 Type	M	W	T	A	B	C	D
7 英寸 7inch dia.Reel	01005、0201 0402、0603 0805、1206 1210、2R01 4R01、2R02 4R02、4R03 0508、0612	178±2.0	9.5±1.0	12.5±1.5	2.0±0.5	13.0±0.5	21.0±0.5	58.0±2.0
	2010、2512 1225	178±2.0	13.0±0.5	15.5±1.5	2.0±0.5	13.0±0.5	21.0±0.5	57.0±2.0
13 英寸 13 inch dia.Reel	0201、0402 0603、0805 1206	330±2.0	9.5±1.0	13.4±1.0	2.0±0.5	13.0±0.5	21.0±0.5	100.0±1.0


## ● 编带包装能力 Taping Ability

面带拉力 Top tape peel strength

面带拉力强度未 11~70g (0.1N~0.7N)，速度：300mm/min, 经下列试验后不允许有破裂断带现象。

Peel strength is 11~70g (0.1N~0.7N), with speed of 300mm/min, and should not have flash and tear after peeling.

测试方法 Test method:

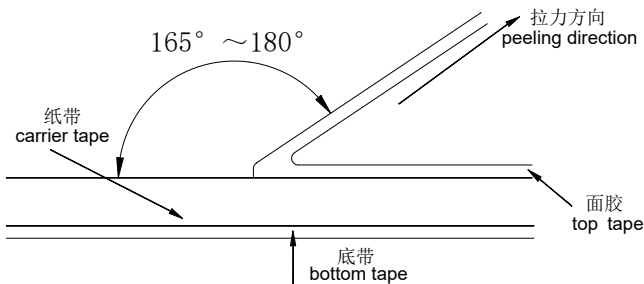

电阻松动自如，无粘面胶带、底胶带现象。

Resistor is free, no sticking to top tape and bottom tape.

电阻易从纸带中取出，且晶片孔无机械损伤。

Resistor is easy to take out from carrier tape and chip hole have no mechanical damage.

## ● 包装数量 Packaging Quantity

包装方法 Packaging style	7 英寸 7inch dia.Reel					13 英寸 13 inch dia.Reel	
型号 Type	01005	0201	0402、2R01 2R02、4R01 4R02	0603、0805 1206、1210 4R03、0508 0612	2010、2512、 1225	0201、 0402	0603、0805、 1206
数量 Quantity (pcs)	20000	15000	10000	5000	4000	50000	50000

## ■ IEC E-24、E-96 系列电阻值代码对照表

### IEC E-24、E-96 Series Resistance Cross-reference List

#### ● E-24 系列 E-24 series ( $\times 10^n \Omega$ )

(单位 unit: 0.001 $\Omega$ 、0.01 $\Omega$ 、0.1 $\Omega$ 、1 $\Omega$ 、10 $\Omega$ 、100 $\Omega$ 、1k $\Omega$ 、10k $\Omega$ 、100k $\Omega$ 、1M $\Omega$ 、10M $\Omega$ 、100M $\Omega$ 、1000M $\Omega$ )

表一 Table One:

1.0	1.5	2.2	3.3	4.7	6.8
1.1	1.6	2.4	3.6	5.1	7.5
1.2	1.8	2.7	3.9	5.6	8.2
1.3	2.0	3.0	4.3	6.2	9.1

● E-96 系列 E-96 series ( $\times 10^n \Omega$ )

(单位 unit: 0.001 $\Omega$ 、0.01 $\Omega$ 、0.1 $\Omega$ 、1 $\Omega$ 、10 $\Omega$ 、100 $\Omega$ 、1k $\Omega$ 、10k $\Omega$ 、100k $\Omega$ 、1M $\Omega$ 、10M $\Omega$ 、100M $\Omega$ 、1000M $\Omega$ )

表二 Table Two:

1.00	1.33	1.78	2.37	3.16	4.22	5.62	7.50
1.02	1.37	1.82	2.43	3.24	4.32	5.76	7.68
1.05	1.40	1.87	2.49	3.32	4.42	5.90	7.87
1.07	1.43	1.91	2.55	3.40	4.53	6.04	8.06
1.10	1.47	1.96	2.61	3.48	4.64	6.19	8.25
1.13	1.50	2.00	2.67	3.57	4.75	6.34	8.45
1.15	1.54	2.05	2.74	3.65	4.87	6.49	8.66
1.18	1.58	2.10	2.80	3.74	4.99	6.65	8.87
1.21	1.62	2.15	2.87	3.83	5.11	6.81	9.09
1.24	1.65	2.21	2.94	3.92	5.23	6.98	9.31
1.27	1.69	2.26	3.01	4.02	5.36	7.15	9.53
1.30	1.74	2.32	3.09	4.12	5.49	7.32	9.76

● E-96 系列 0603 型号《乘数代码对照表》及《电阻值代码对照表》

E-96 series(0603)《multiplied Cross-reference List》And《Resistance Cross-reference List》

表三 Table Three:

乘数 multiplied	$\times 10^0$	$\times 10^1$	$\times 10^2$	$\times 10^3$	$\times 10^4$	$\times 10^5$	$\times 10^6$	$\times 10^7$	$\times 10^{-1}$	$\times 10^{-2}$	$\times 10^{-2}$	$\times 10^{-3}$
代码 code	A	B	C	D	E	F	G	H	X	Y	Y	Z

表四 Table Four:

代号 code	E-96 系列电阻 E-96 resistance	代号 code	E-96 系列电阻 E-96 resistance	代号 code	E-96 系列电阻 E-96 resistance	代号 code	E-96 系列电阻 E-96 resistance
01	100	25	178	49	316	73	562
02	102	26	182	50	324	74	576
03	105	27	187	51	332	75	590
04	107	28	191	52	340	76	604
05	110	29	196	53	348	77	619
06	113	30	200	54	357	78	634
07	115	31	205	55	365	79	649
08	118	32	210	56	374	80	665
09	121	33	215	57	383	81	681
10	124	34	221	58	392	82	698
11	127	35	226	59	402	83	715
12	130	36	232	60	412	84	732
13	133	37	237	61	422	85	750
14	137	38	243	62	432	86	768
15	140	39	249	63	442	87	787
16	143	40	255	64	453	88	806
17	147	41	261	65	464	89	825
18	150	42	267	66	475	90	845
19	154	43	274	67	487	91	866
20	158	44	280	68	499	92	887
21	162	45	287	69	511	93	909
22	165	46	294	70	523	94	931
23	169	47	301	71	536	95	953
24	174	48	309	72	549	96	976

## ■厚膜电阻阻值代码及标记规则

### Description for Resistance Value Code and Marking of Thick Film Chip Resistor

#### ●阻值代码 Resistance Value Code

所有厚膜电阻的阻值代码与其标记是相对的。

All the resistance value code of thick film chip resistor is corresponding with the marking.

#### ●标记 Marking


\*E-24 系列 (0603、 $\geq \pm 5\%$ )：采用三位数字表示，前二位表示电阻值有效数字，第三位表示乘以 10 的次方数。

E-24 series: Express resistance value on the glass side with three digits, the first two digits should be significant and the third one denotes number of zeros.

例 For example   $\longrightarrow$  30K $\Omega$    $\longrightarrow$  33 $\Omega$

\*E-24 系列 (0603、 $\leq \pm 1\%$ )：在三位数字标记下方增加下横线识别。

E-24 series(0603、 $\leq \pm 1\%$ ): One short bar under marking letter.

例 For example: 

\*E-96 系列和 E-24 系列 (0508、0805、0612、1206、1225、1210、2010、2512、 $\pm 1\%$  &  $\pm 0.5\%$ )：

▲采用四位数字表示，前三位表示电阻值有效数字，第四位表示乘以 10 的次方数。

E-96 series & E-24 series (0508、0805、0612、1206、1225、1210、2010、2512、 $\pm 1\%$  &  $\pm 0.5\%$ ): Express the resistance value with four digits, the first three digits are significant figures and the fourth de notes the number of zeros.

例 For example:   $\longrightarrow$  100K $\Omega$

\*E-96 系列 (0603、 $\leq \pm 1\%$ )：

▲采用三位代码表示，前两位表示 E-96 系列阻值代码，后一位字母表示乘数代码（见表三和表四）。

Express the resistance value with three code, the first two digit code denote the resistance of E-96 series, and the third code of letter denote the multiplier (see the table three and four ).

例 For example:   $\longrightarrow$  2M $\Omega$

\*小数点以“R”表示 The decimal point should be expressed by “R” .

例 For example:   $\longrightarrow$  5.6 $\Omega$    $\longrightarrow$  22 $\Omega$

\*跨接电阻以“0”表示 The jumper should be expressed by “0”

例 For example:



0 Ω



0 Ω

\*≤ 0402 产品不作标记 : For the chip resistor (≤ 0402) , there is no mark on the glass side.

例 For example:



\*非 IEC 标准系列的电阻值标记表示方法：一般以最接近 IEC E24 系列标称阻值的标记表示方法。

For the resistance values which don't belong to IEC serial, use the resistance of IEC serial which is most close to the required resistance of non-IEC serial for replacement.

\*客户对标记有特殊要求时，则按照协商的结果印刷标记。

To get agreement by both party if the customers have special requirements for the marking.

#### ■ 薄膜电阻阻值代码及标记规则

Description for Resistance Value Code and Marking of Thin of Thin Film Chip Resistor

##### ● 阻值代码 Resistance Value Code

所有薄膜电阻全尺寸统一采用四位数阻值代码表示。

All resistance value code of thin film chip resistor used four digits.

例 Example

TD03G4701BT



四位数代号表示，如：4701=4.7KΩ；1R50=1.5Ω

To use four digits codes represent resistance value,

例 Example 4701=4.7KΩ 1R50=1.5Ω

##### ● 标记 Marking

\* 当阻值同时存在于 E24 和 E96 系列时，优先采用 E96 系列。

When resistance value belongs to E24 as well as E96 series, we suggest preferentially use E96 series.

例 Example 10K=1002, ≠103

\*≥ 0805 产品标记 For the chip resistor (≥ 0805) :

▲采用四位数字表示，前三位表示电阻值有效数字，第四位表示 10 的次方数。

Express the resistance value with four digits, the first three digits are significant figures and the fourth denotes the number of zeros.

例 Example




100KΩ

\*0603 标记 Marking for 0603 Size Resistor

▲0603-E96 系列：采用三位代码表示，前二位表示 E-96 系列阻值代码，后一位字母表示乘数代码（见表三和表四）；

Express the resistance value with three code, the first two digit code denote the resistance of E-96 series, and the third code of letter denote the multiplier (see the table three and four).


例 Example



▲0603-E24 系列：采用三位数字表示，前二位表示电阻值有效数字，第三位表示 10 的次方数。


Express the resistance value on the glass side with three digits, the first two digits should be significant and the third denote number of zeros.

例 Example



\*▲小数点以“R”表示 The decimal point should be expressed by“R”.

例 Example



\*≤ 0402 产品：不作标记 For the chip resistor ( ≤ 0402 ) , there is no mark on the glass side.

例 Example



## ■电流检测电阻阻值代码及标记规则

### Description for resistance Value Code and Marking of Current Sensing Thick Film Chip Resistor

#### ● 阻值代码 Resistance Value Code

所有电流检测电阻全尺寸统一采用四位数阻值代码表示。

All resistance value code of current sensing thick film chip resistor used four digits.

例 Example

RBF03MR010FT

四位数代号表示，如：R010=10mΩ；30M1=30.1mΩ

To use four digits codes represent resistance value,

例 Example R010=10mΩ；30M1=30.1mΩ

#### ● 标记 Marking

\*E-24 和 E-96 系列（0508、0805、0612、1206、1225、1210、2010、2512， ≤±5%）：采用四位标记代码。

For（0508、0805、0612、1206、1225、1210、2010、2512， ≤±5%），when resistance value belongs to E24 and E96 series, we suggest preferentially use four digits.

标记代码 Mark Code	阻值范围 Resistance Value	示例 Sample
R00×	$1\text{m}\Omega \leq R \leq 9\text{m}\Omega$	R005=5mΩ
R0×	$10\text{m}\Omega \leq R \leq 99\text{m}\Omega$	R033=33mΩ
R×	$100\text{m}\Omega \leq R \leq 999\text{m}\Omega$	R100=100mΩ
×	$1\text{m}\Omega < R < 10\text{m}\Omega$ (包含小数点后两位有效数字) (Contains two significant digits after the decimal point.)	5M10=5.1mΩ
×	$10\text{m}\Omega < R < 100\text{m}\Omega$ (包含小数点后一位数字) (Contains one significant digit after the decimal point.)	30M1=30.1mΩ

\* E-24 和 E-96 系列 (0603,  $\leq \pm 5\%$ ) : 采用三位标记代码。

For the chip resistor (0603,  $\leq \pm 5\%$ ), when resistance value belongs to E024 and E96 series, we suggest preferentially use three digits.

标记代码 Mark Code	阻值范围 Resistance Value	示例 Sample
V0×	$1\text{m}\Omega \leq R \leq 9\text{m}\Omega$	V05=5mΩ
V×	$10\text{m}\Omega \leq R \leq 99\text{m}\Omega$	V33=33mΩ
R×	$100\text{m}\Omega \leq R \leq 999\text{m}\Omega$	R100=100mΩ
×	$1\text{m}\Omega < R < 10\text{m}\Omega$ (包含小数点后一位有效数字) (Contains one significant digit after the decimal point.)	5M10=5.1mΩ

\* ≤0402 产品不印刷标记。

For the chip resistor ( $\leq 0402$ ), there is no mark on the glass side.

\*非 IEC 标准系列的电阻标记表示方法: 一般以最接近 IEC E24 系列标称阻值的标记表示方法。

For the resistance values which don't belong to IEC serial, use the resistance of IEC serial which is most close to the required resistance of non-IEC serial for replacement.

\* 客户对标记有特殊要求时, 则按照协商的结果印刷标记。

To get agreement by both party if there special requirement for the marking.

#### ■ 片式电阻器使用说明 Chip Resistor Instructions For Use

● 本产品在以下特殊环境下应用, 性能可能会受到影响:

- 1、在各种类型的液体, 包括水、油、化学品、有机溶剂的使用。
- 2、在户外直接暴露在阳光的地方, 或在灰尘多的地方使用。
- 3、在产品暴露的地方, 有海风或腐蚀性气体, 包括氯气、硫化氢、氨气、二氧化硫、二氧化氮。
- 4、在产品暴露于静电或电磁波的地方使用。
- 5、在产生热量的部件、塑料线, 或其他易燃物品附近使用。
- 6、在用树脂或其他涂层材料密封产品的情况下使用。
- 7、焊接后使用不洁焊料或使用水或水溶性清洗剂清洗产品。

8、片状电阻器的基材是氧化铝。由于和安装基板的热膨胀系数不同，在反复施加提供热循环等热应力时，接合部的焊锡（焊锡部）有时会发生裂纹。如果环境温度反复发生很大的变动，并且载荷反复进行 ON/OFF，则需要注意龟裂的发生。因热应力而发生的龟裂，取决于所安装的焊盘的大小、焊锡量、安装基板的散热性等，因此在环境温度有很大的变化或者载荷 NO/OFF 的条件下使用时，请充分注意以进行设计。

● Application of the products in a special environment can deteriorate product performance:

1、Use in various types of liquid, including water, oils, chemicals, and organic solvents.

2、Use outdoors where the products are exposed to direct sunlight, or in dusty places.

3、Use in places where the products are exposed to sea winds or corrosive gases, including  $\text{Cl}_2$ ,  $\text{H}_2\text{S}$ ,  $\text{NH}_3$ ,  $\text{SO}_2$ , and  $\text{NO}_2$  etc.

4、Use in places where the products are exposed to static electricity or electromagnetic waves.

5、Use in proximity to heat-producing components, plastic cords, or other flammable items.

6、Use involving sealing or coating the products with resin or other coating materials.

7、Use involving unclean solder or use of water or water-soluble cleaning agents for cleaning after soldering.

8、The substrate of chip resistors is alumina. Cracks may occur at the connection of solder (solder fillet portion) due to the difference of the coefficient of thermal expansion from a mounting board when heat stresses like heat cycle, etc. are repeatedly given to them. Care should be taken to the occurrence of the cracks when the change in ambient temperature or ON/OFF of load is repeated. The occurrence of the crack by heat stress may be influenced by the size of a pad, solder volume, heat radiation of mounting board etc., so please pay careful attention to designing when a big change in ambient temperature and conditions for use like ON/OFF of load can be assumed.

#### ● 产品使用注意事项

1、避免采用超过正常额定功率的功率，超过额定功率的稳态负载条件下可能会对产品性能和可靠性产生负面影响。

2、用镊子拿起产品时要小心，有可能会将保护或电阻体夹碎。

3、手动安装产品时，烙铁头勿触碰产品。

4、贮存条件：温度  $5^{\circ}\text{C} \sim 30^{\circ}\text{C}$ ，相对湿度 30%~70%。建议在符合上述储存条件下六个月内使用。

5、用于车载设备、医疗设备、航空设备以及其他涉及人身安全、或可能引起重大损失的设备上时，请务必事先与我公司联系。这些产品在这类用途中出现故障或失灵可能导致人身事故或严重损坏。

#### ● Precautions on use of products

1、Avoid applying power exceeding normal rated power, exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.

2、Be careful when pick up the products with tweezers. There may be a care that the overcoat and / or the body can be chipped.

3、Soldering tip shall not touch the product when install product manually.


4、Storage conditions: T:  $5^{\circ}\text{C} \sim 30^{\circ}\text{C}$ , RH: 30%~70%. The products are suggested to be used within six months when received, and the storage condition mentioned above should be followed.

5、Contact our sales representatives before you use our products for applications including automotive, medical equipment and aerospace equipment. Malfunction or failure of the products in such applications may cause loss of human life or serious damage.




## ■ 焊接 Soldering

● 推荐的回流焊曲线 Recommended reflow profile

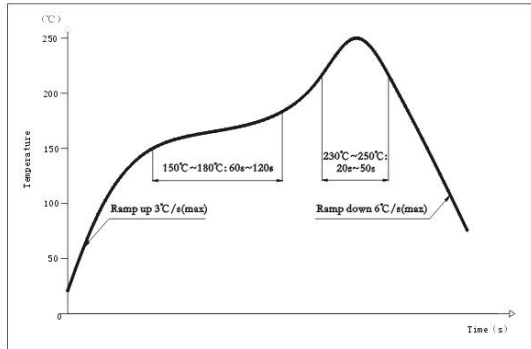

● 推荐的波峰焊曲线 Recommended wave solder profile

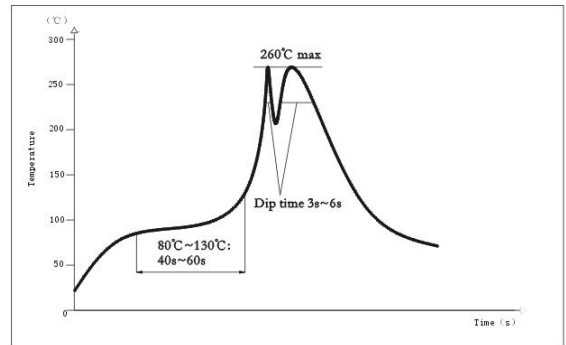

● 推荐的焊膏类型 Recommended solder alloy: 96.5Sn-3.0Ag-0.5Cu

**◆修订履历 Revision History**

版本 Version	日期 Date	修订内容 Change Description	修订确认 Checked by
V9.0	2025-3-27	-修改“产品结构图”的参数 Revised the parameters of Construction. -新增产品的规格尺寸 Add the dimensions of products.	何国强 Guoqiang He
V8.0	2023-8-16	-修改“包装”的参数 Revised the parameters of packaging. -修改“额定值”的参数 Revised the parameters of Ratings. -新增及修改部分产品的规格尺寸 Add and revised the dimensions of products	敖桂荣 Guirong Ao
V7.0	2023-4-25	-“品名构成”中增加功率 8W、10W、15W Add power rating 8W/10W/15W to type designation -修改“额定值”的参数 Revised the parameters of Ratings. -新增及修改部分产品的规格尺寸 Add and revised the dimensions of products	敖桂荣 Guirong Ao
V6.0	2023-2-23	-规格尺寸、额定值：2512 增加 0.2mΩ Dimensions and Ratings:2512 add 0.2mΩ -修改 3921 (2mΩ) “额定值”的参数 -Revised the “Ratings” of 3921(2mΩ) product	敖桂荣 Guirong Ao
V5.0	2023-2-20	-附录：增加 RH-MY04, RH-MY08 产品编带包装参数 Appendix:Add the taping parameters of RH-MY04,RH-MY08 -附录：修改 0201, 0603, 0805 编带包装 A, B, T 参数 Appendix: Modify the taping parameters A,B,T of 201040206030805	卢振强 Zhenqiang Lu
V4.0	2022-10-13	-规格尺寸、额定值：5931 增加 0.1mΩ Dimensions and Ratings:5931 add 0.1mΩ -特性：修改“短时间过负载”、“温度快速变化的”的测试方法。 Characteristics;Revised the test methods of Short time overload and Rapid Change of Temperature.	杜建业 Jianye Du
V3.0	2022-4-21	-“品名构成”中增加功率 9W Add power rating 9W to type designation -修改“额定值”的参数 Revised the parameters of Ratings. -修改“包装”的参数 Revised the parameters of packaging. -修改“推荐焊盘尺寸”的参数 Revised the parameters of solder pad dimensions.	杜建业 Jianye Du
V2.0	2022-2-25	-附录中“包装数量”：修改 0201 尺寸为 15K 包装数量 Revise the quantity of 0201 15Kpcs to Packaging Quantity	杜建业 Jianye Du
V2020.1.0	2021-1-6	-增加额定功率 4W。Add the rated power4W -修改 5931 (0.5mΩ) “t” 值 Revised the“t”of 5931(0.5mΩ) product -修改额定值 Revised the ratings	何国强 Guoqiang He
V2020.0	2020-6-23	原版 The original version	吴晓玲 Xiaoling Wu

注: 上述所提供之内容为产品规格说明。在产品未变更时, 风华保有修改此内容不另行通知之所有权利, 任何产品变更将会以 PCN 通知客户。

Remark: Information provided above is intended to indicate product specifications only. Fenghua reserves all the rights for revising this content without further notification, as long as products are unchanged. Any product change will be announced by PCN.