

■AHW 车规绕线型片式电感器

AHW Automotive Grade Wire Wound Chip Inductors

◆特征 Feature

- * 体积小，适合高密度表面贴装

Small Size Suitable For SMT.

- * 精度高、Q 值高

High Q Value And Tight Inductance Tolerance.

- * 本产品满足 AEC-Q200 汽车标准相关条款

The products involved in this letter are compliant with AEC-Q200 standard.



◆应用 Application

- * 推荐用于汽车信息系统、影音娱乐系统、车身与舒适系统等。

recommended for automobile information system, audio-visual entertainment system, body and comfort system, etc.

◆型号表示法 Part Number

AHW	0603	UC	068	J	S	T	AEA
①	②	③	④	⑤	⑥	⑦	⑧

①产品类型 Product Type:

AHW: 车规绕线型片式电感器系列

AHW: Automotive Grade Wire Wound Inductor Series

②尺寸 Dimensions: 0402(1.0×0.5mm)、0603 (1.6×0.8mm)、0805 (2.0×1.2mm)

③材料代号 Material Code: UC---陶瓷芯 Ceramic Core

④标称电感量 Inductance: 1N0=1.0nH、010=10nH、R10=100nH、1R0=1.0μH、100=10μH


⑤标称电感值偏差 Tolerance: F---±1%; G---±2%; J---±5%; K---±10%; M---±20%

⑥电极表面镀层材料 Terminal: G---金端头 Gold; S---锡端头 Tin

⑦包装 Packaging: T: 编带包装 Tape & Reel

⑧设计代号 Design Code

◆产品结构 Product Structure

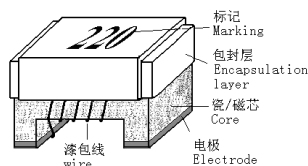


序号 No.	部位 Component	材料 Material
1	瓷芯Core	陶瓷体Al ₂ O ₃
2	电极Electrode	锡或金Sn or Au
3	漆包线wire	铜Cu
4	包封层encapsulation layer	树脂UV Adhesive
5	标识Marking	油墨UV printing ink

* 0402及0603系列产品无印标识 0402&0603 series products are not marked.

◆规格尺寸 Dimension

单位 Unit: mm (inch)

Size	L (Max)	W (Max)	T (Max)	A(typ)	B(typ)	C(typ)	D(typ)	E(typ)
1005 (0402)	1.19 (0.047)	0.66 (0.026)	0.60 (0.024)	0.50 (0.020)	0.23 (0.009)	0.66 (0.026)	0.36 (0.014)	0.46 (0.018)
1608 (0603)	1.78 (0.070)	1.10 (0.043)	0.95 (0.037)	0.76 (0.030)	0.30 (0.012)	1.02 (0.040)	0.64 (0.025)	0.64 (0.025)
2012 (0805)	2.30 (0.091)	1.70 (0.067)	1.52 (0.060)	1.27 (0.050)	0.50 (0.020)	1.78 (0.070)	1.02 (0.040)	0.76 (0.030)

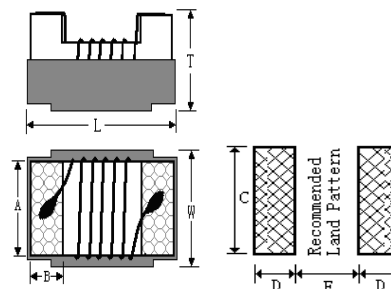

◆工作温度范围 Operating Temperature Range

工作温度范围: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$

Operating Temperature Range: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$

◆电性能参数 Electrical Characteristics

* 测试条件 Testing conditions

电感量/Q 值 Inductance/ Q: HP4286A 或 E4982A 电桥或等同测量仪器, 测试电压 500mV. HP4286A or E4982A bridge or equivalent measuring instrument, test voltage 500mV.

直流电阻 Rdc: HP4286A、RM3542 或等同测量仪器. HP4286A、RM3542 or equivalent measuring instrument.

额定电流 Rated current: 施加额定电流, 产品表面温升不超过 20°C 。使用直流电流源、LCR 测试仪与温表测试。Apply the rated current, and the surface temperature rise of the product shall not exceed 20°C . Use a DC current source, LCR tester, and temperature gauge for testing.

0402 Type

型号 Part NO	电感量 Inductance (nH)	偏差范围 Tolerance	Q 值 Q (Min)	自谐振频率 SRF (MHZ) Min	最大直流电阻 Rdc (Ω) Max	额定电流 Idc(mA) Max	印字代码 Marking
AHW0402UC1N0□ST	1.0@250MHz	K	13@250MHz	10000	0.045	1360	/
AHW0402UC1N2□ST	1.2@250MHz	K	8@250MHz	10000	0.135	640	/
AHW0402UC1N8□ST	1.8@250MHz	K	16@250MHz	6000	0.070	1040	/
AHW0402UC1N9□ST	1.9@250MHz	K	16@250MHz	6000	0.070	1040	/
AHW0402UC2N0□ST	2.0@250MHz	K	18@250MHz	6000	0.070	1040	/
AHW0402UC2N2□ST	2.2@250MHz	K	18@250MHz	6000	0.070	960	/
AHW0402UC2N4□ST	2.4@250MHz	K	16@250MHz	6000	0.080	790	/
AHW0402UC2N5□ST	2.5@250MHz	K	15@250MHz	6000	0.120	640	/
AHW0402UC2N7□ST	2.7@250MHz	K	15@250MHz	6000	0.120	640	/
AHW0402UC2N9□ST	2.9@250MHz	K	8@250MHz	6000	0.300	400	/
AHW0402UC3N0□ST	3.0@250MHz	K	8@250MHz	6000	0.300	400	/
AHW0402UC3N3□ST	3.3@250MHz	J,K	20@250MHz	6000	0.066	840	/
AHW0402UC3N6□ST	3.6@250MHz	G,J,K	20@250MHz	6000	0.066	840	/
AHW0402UC3N9□ST	3.9@250MHz	G,J,K	20@250MHz	6000	0.066	840	/
AHW0402UC4N0□ST	4.0@250MHz	G,J,K	20@250MHz	6000	0.066	840	/
AHW0402UC4N2□ST	4.2@250MHz	G,J,K	20@250MHz	6000	0.091	700	/
AHW0402UC4N3□ST	4.3@250MHz	G,J,K	20@250MHz	6000	0.091	700	/
AHW0402UC4N7□ST	4.7@250MHz	G,J,K	18@250MHz	4500	0.200	640	/
AHW0402UC5N1□ST	5.1@250MHz	G,J,K	18@250MHz	4800	0.083	800	/
AHW0402UC5N6□ST	5.6@250MHz	G,J,K	20@250MHz	4800	0.083	760	/
AHW0402UC6N2□ST	6.2@250MHz	G,J,K	23@250MHz	4800	0.083	760	/
AHW0402UC6N8□ST	6.8@250MHz	G,J,K	23@250MHz	4800	0.260	680	/
AHW0402UC7N5□ST	7.5@250MHz	G,J,K	23@250MHz	4800	0.100	680	/
AHW0402UC8N2□ST	8.2@250MHz	G,J,K	25@250MHz	4400	0.100	680	/
AHW0402UC8N7□ST	8.7@250MHz	G,J,K	25@250MHz	4K0	0.200	480	/
AHW0402UC9N0□ST	9.0@250MHz	G,J,K	25@250MHz	4160	0.100	680	/

AHW0402UC9N5□ST	9.5@250MHz	G,J,K	25@250MHz	4000	0.200	480	/
AHW0402UC010□ST	10@250MHz	G,J,K	25@250MHz	3900	0.200	480	/
AHW0402UC011□ST	11@250MHz	G,J,K	25@250MHz	3680	0.120	640	/
AHW0402UC012□ST	12@250MHz	J,K	25@250MHz	3600	0.120	640	/
AHW0402UC013□ST	13@250MHz	G,J,K	25@250MHz	3450	0.210	440	/
AHW0402UC015□ST	15@250MHz	G,J,K	25@250MHz	3280	0.300	560	/
AHW0402UC016□ST	16@250MHz	G,J,K	25@250MHz	3100	0.220	560	/
AHW0402UC018□ST	18@250MHz	G,J,K	25@250MHz	3100	0.230	420	/
AHW0402UC019□ST	19@250MHz	G,J,K	25@250MHz	3040	0.200	480	/
AHW0402UC020□ST	20@250MHz	G,J,K	25@250MHz	3000	0.250	420	/
AHW0402UC022□ST	22@250MHz	G,J,K	25@250MHz	2800	0.300	400	/
AHW0402UC023□ST	23@250MHz	G,J,K	22@250MHz	2720	0.380	310	/
AHW0402UC024□ST	24@250MHz	G,J,K	25@250MHz	2700	0.300	400	/
AHW0402UC027□ST	27@250MHz	G,J,K	24@250MHz	2480	0.520	280	/
AHW0402UC030□ST	30@250MHz	G,J,K	25@250MHz	2350	0.500	400	/
AHW0402UC033□ST	33@250MHz	G,J,K	24@250MHz	2350	0.650	350	/
AHW0402UC036□ST	36@250MHz	G,J,K	25@250MHz	2320	0.600	250	/
AHW0402UC039□ST	39@250MHz	G,J,K	25@250MHz	2100	0.750	200	/
AHW0402UC040□ST	40@250MHz	G,J,K	25@250MHz	2240	0.600	220	/
AHW0402UC043□ST	43@250MHz	J,K	25@250MHz	2030	0.810	100	/
AHW0402UC047□ST	47@250MHz	G,J,K	25@250MHz	2100	0.830	150	/
AHW0402UC051□ST	51@250MHz	J,K	25@250MHz	1750	0.820	100	/
AHW0402UC056□ST	56@250MHz	G,J,K	25@250MHz	1760	0.970	100	/
AHW0402UC062□ST	62@250MHz	G,J,K	25@250MHz	1620	1.120	100	/
AHW0402UC068□ST	68@250MHz	G,J,K	25@250MHz	1620	1.120	100	/
AHW0402UC075□ST	75@250MHz	G,J,K	25@250MHz	1400	1.630	50	/
AHW0402UC082□ST	82@250MHz	G,J,K	25@250MHz	1260	1.700	50	/
AHW0402UCR10□ST	100@250MHz	G,J,K	25@250MHz	1160	2.000	30	/
AHW0402UCR12□ST	120@250MHz	G,J,K	25@250MHz	1100	2.200	30	/

0603 Type

型号 Part NO	电感量 Inductance (nH)	偏差范围 Tolerance	Q 值 Q (Min)	自谐振频率 SRF (MHZ) Min	最大直流电阻 Rdc (Ω) Max	额定电流 Idc(mA) Max	印字代码 Marking
AHW0603UC1N6□ST	1.6@250MHz	K	18@250MHz	12500	0.040	700	/
AHW0603UC1N7□ST	1.7@250MHz	J,K	18@250MHz	12500	0.045	700	/
AHW0603UC1N8□ST	1.8@250MHz	K	16@250MHz	12500	0.045	700	/
AHW0603UC2N0□ST	2.0@250MHz	J,K	12@250MHz	10000	0.090	700	/
AHW0603UC2N2□ST	2.2@250MHz	K	12@250MHz	10000	0.090	700	/
AHW0603UC3N3□ST	3.3@250MHz	K	20@250MHz	5900	0.075	700	/
AHW0603UC3N6□ST	3.6@250MHz	J,K	22@250MHz	5900	0.075	700	/
AHW0603UC3N9□ST	3.9@250MHz	J,K	22@250MHz	6900	0.080	700	/
AHW0603UC4N3□ST	4.3@250MHz	J,K	22@250MHz	5900	0.075	700	/
AHW0603UC4N7□ST	4.7@250MHz	J,K	20@250MHz	5800	0.116	700	/
AHW0603UC5N1□ST	5.1@250MHz	J,K	20@250MHz	5700	0.120	700	/
AHW0603UC6N0□ST	6.0@250MHz	J,K	27@250MHz	5700	0.110	700	/
AHW0603UC6N2□ST	6.2@250MHz	J,K	27@250MHz	5700	0.110	700	/
AHW0603UC6N8□ST	6.8@250MHz	G,J,K	27@250MHz	5800	0.110	700	/



AHW0603UC7N5□ST	7.5@250MHz	G,J,K	28@250MHz	4800	0.110	700	/
AHW0603UC8N2□ST	8.2@250MHz	G,J,K	28@250MHz	4700	0.120	700	/
AHW0603UC8N7□ST	8.7@250MHz	G,J,K	28@250MHz	4600	0.120	700	/
AHW0603UC9N1□ST	9.1@250MHz	G,J,K	26@250MHz	4500	0.150	700	/
AHW0603UC9N5□ST	9.5@250MHz	G,J,K	26@250MHz	5400	0.150	700	/
AHW0603UC010□ST	10@250MHz	G,J,K	31@250MHz	4800	0.130	700	/
AHW0603UC011□ST	11@250MHz	G,J,K	33@250MHz	4000	0.130	700	/
AHW0603UC012□ST	12@250MHz	G,J,K	35@250MHz	4000	0.130	700	/
AHW0603UC013□ST	13@250MHz	G,J,K	30@250MHz	4000	0.140	700	/
AHW0603UC014□ST	14@250MHz	G,J,K	35@250MHz	4000	0.140	700	/
AHW0603UC015□ST	15@250MHz	G,J,K	30@250MHz	4000	0.150	700	/
AHW0603UC016□ST	16@250MHz	G,J,K	34@250MHz	3300	0.160	700	/
AHW0603UC018□ST	18@250MHz	G,J,K	35@250MHz	3100	0.170	700	/
AHW0603UC020□ST	20@250MHz	G,J,K	38@250MHz	3000	0.190	700	/
AHW0603UC022□ST	22@250MHz	G,J,K	38@250MHz	3000	0.190	700	/
AHW0603UC024□ST	24@250MHz	G,J,K	37@250MHz	2650	0.200	700	/
AHW0603UC025□ST	25@250MHz	G,J,K	38@250MHz	2600	0.210	700	/
AHW0603UC027□ST	27@250MHz	G,J,K	36@250MHz	2800	0.220	600	/
AHW0603UC030□ST	30@250MHz	G,J,K	37@250MHz	2250	0.220	600	/
AHW0603UC033□ST	33@250MHz	G,J,K	36@250MHz	2300	0.220	600	/
AHW0603UC036□ST	36@250MHz	G,J,K	36@250MHz	2080	0.250	600	/
AHW0603UC039□ST	39@250MHz	G,J,K	40@250MHz	2200	0.250	600	/
AHW0603UC043□ST	43@250MHz	G,J,K	36@250MHz	2000	0.280	600	/
AHW0603UC047□ST	47@200MHz	G,J,K	36@200MHz	2000	0.280	600	/
AHW0603UC049□ST	49@200MHz	G,J,K	36@200MHz	2000	0.280	600	/
AHW0603UC050□ST	50@200MHz	G,J,K	36@200MHz	1900	0.295	600	/
AHW0603UC051□ST	51@200MHz	G,J,K	36@200MHz	1900	0.300	600	/
AHW0603UC056□ST	56@200MHz	G,J,K	38@200MHz	1900	0.280	600	/
AHW0603UC068□ST	68@200MHz	G,J,K	36@200MHz	1700	0.340	600	/
AHW0603UC072□ST	72@150MHz	G,J,K	34@150MHz	1700	0.530	400	/
AHW0603UC075□ST	75@150MHz	G,J,K	30@150MHz	1400	0.600	400	/
AHW0603UC082□ST	82@150MHz	G,J,K	34@150MHz	1700	0.550	400	/
AHW0603UC091□ST	91@150MHz	G,J,K	30@150MHz	1400	0.630	400	/
AHW0603UCR10□ST	100@150MHz	G,J,K	30@150MHz	1400	0.630	400	/
AHW0603UCR11□ST	110@150MHz	G,J,K	32@150MHz	1350	0.670	300	/
AHW0603UCR12□ST	120@150MHz	G,J,K	32@150MHz	1300	0.730	300	/
AHW0603UCR15□ST	150@150MHz	G,J,K	28@150MHz	990	0.800	280	/
AHW0603UCR16□ST	160@100MHz	G,J,K	25@100MHz	990	1.250	250	/
AHW0603UCR18□ST	180@100MHz	G,J,K	25@100MHz	990	1.450	240	/
AHW0603UCR20□ST	200@100MHz	G,J,K	25@100MHz	900	1.550	200	/
AHW0603UCR22□ST	220@100MHz	G,J,K	25@100MHz	900	2.100	200	/
AHW0603UCR25□ST	250@100MHz	G,J,K	25@100MHz	822	3.550	120	/
AHW0603UCR27□ST	270@100MHz	G,J,K	24@100MHz	900	2.300	170	/
AHW0603UCR30□ST	300@100MHz	G,J,K	24@100MHz	1000	3.000	100	/
AHW0603UCR33□ST	330@100MHz	G,J,K	25@100MHz	900	3.890	100	/
AHW0603UCR39□ST	390@100MHz	G,J,K	25@100MHz	800	4.350	100	/
AHW0603UCR47□ST	470@100MHz	G,J,K	25@100MHz	700	7.000	75	/

0805 Type



型号 Part NO	电感量 Inductance (nH)	偏差范围 Tolerance	Q 值 Q (Min)	自谐振频率 SRF (MHZ) Min	最大直流电阻 Rdc (Ω) Max	额定电流 Idc(mA) Max	印字代码 Marking
AHW0805UC2N2□GT	2.2@250MHz	K	50@1500MHz	8500	0.030	800	2N2
AHW0805UC2N7□GT	2.7@250MHz	J,K	50@1500MHz	8000	0.045	800	2N7
AHW0805UC3N3□GT	3.3@250MHz	K	35@1500MHz	7900	0.090	600	3N3
AHW0805UC4N7□GT	4.7@250MHz	K	40@1000MHz	6000	0.050	600	4N7
AHW0805UC5N6□GT	5.6@250MHz	J,K	50@1000MHz	5500	0.065	600	5N6
AHW0805UC6N8□GT	6.8@250MHz	J,K	50@1000MHz	5500	0.110	600	6N8
AHW0805UC8N2□GT	8.2@250MHz	J,K	35@1000MHz	4700	0.200	600	8N2
AHW0805UC010□GT	10@250MHz	G,J,K	50@500MHz	4200	0.150	600	10N
AHW0805UC012□GT	12@250MHz	G,J,K	50@500MHz	4000	0.150	600	12N
AHW0805UC015□GT	15@250MHz	G,J,K	45@500MHz	3400	0.170	600	15N
AHW0805UC018□GT	18@250MHz	G,J,K	55@500MHz	3300	0.200	600	18N
AHW0805UC022□GT	22@250MHz	G,J,K	55@500MHz	2600	0.220	500	22N
AHW0805UC027□GT	27@250MHz	G,J,K	55@500MHz	2500	0.250	500	27N
AHW0805UC033□GT	33@250MHz	G,J,K	55@500MHz	2050	0.270	500	33N
AHW0805UC039□GT	39@250MHz	G,J,K	55@500MHz	2000	0.290	500	39N
AHW0805UC047□GT	47@200MHz	G,J,K	55@500MHz	1650	0.310	500	47N
AHW0805UC056□GT	56@200MHz	G,J,K	55@500MHz	1550	0.340	500	56N
AHW0805UC068□GT	68@200MHz	G,J,K	55@500MHz	1450	0.380	500	68N
AHW0805UC075□GT	75@200MHz	G,J,K	55@500MHz	1400	0.400	400	75N
AHW0805UC082□GT	82@150MHz	G,J,K	55@500MHz	1300	0.420	400	82N
AHW0805UCR10□GT	100@150MHz	G,J,K	50@500MHz	1200	0.460	400	R10
AHW0805UCR12□GT	120@150MHz	G,J,K	45@250MHz	1100	0.510	400	R12
AHW0805UCR15□GT	150@100MHz	G,J,K	45@250MHz	920	0.560	400	R15
AHW0805UCR18□GT	180@100MHz	G,J,K	45@250MHz	870	0.640	400	R18
AHW0805UCR22□GT	220@100MHz	G,J,K	40@250MHz	850	1.050	400	R22
AHW0805UCR27□GT	270@100MHz	G,J,K	40@250MHz	650	1.100	350	R27
AHW0805UCR33□GT	330@100MHz	J,K	40@250MHz	600	1.400	310	R33
AHW0805UCR39□GT	390@100MHz	J,K	40@250MHz	560	1.500	290	R39
AHW0805UCR47□GT	470@50MHz	J,K	33@100MHz	375	2.000	250	R47
AHW0805UCR56□GT	560@25MHz	J,K	23@50MHz	340	1.900	230	R56
AHW0805UCR68□GT	680@25MHz	J,K	23@50MHz	300	2.100	190	R68
AHW0805UCR75□GT	750@25MHz	J,K	23@50MHz	280	2.120	180	R75
AHW0805UCR82□GT	820@25MHz	J,K	23@50MHz	250	2.140	180	R82
AHW0805UCR91□GT	910@25MHz	J,K	20@50MHz	220	2.280	180	R91
AHW0805UC1R0□GT	1000@25MHz	J,K	20@50MHz	200	2.400	170	1R0
AHW0805UC1R2□GT	1200@7.9MHz	J,K	18@50MHz	180	2.550	170	1R2
AHW0805UC1R5□GT	1500@7.9MHz	J,K	18@50MHz	170	2.800	160	1R5
AHW0805UC1R8□GT	1800@7.9MHz	J,K	18@50MHz	140	3.800	150	1R8
AHW0805UC2R2□GT	2200@7.9MHz	J,K	16@7.9MHz	50	4.200	150	2R2

◆ 产品特性曲线图 Product Characteristic Curve



AHW0402 Type

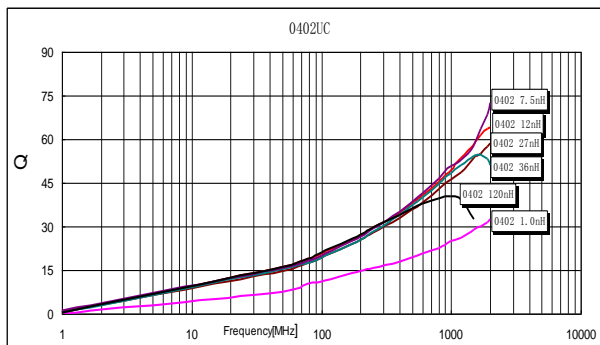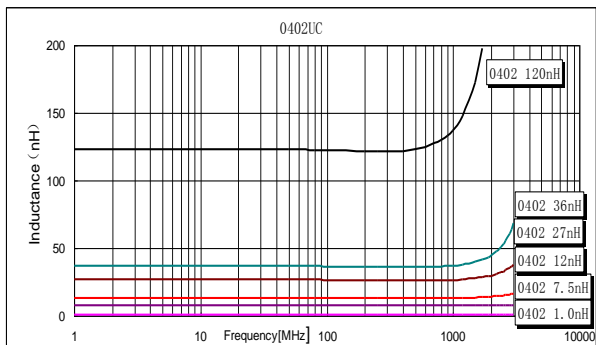

AHW0603 Type

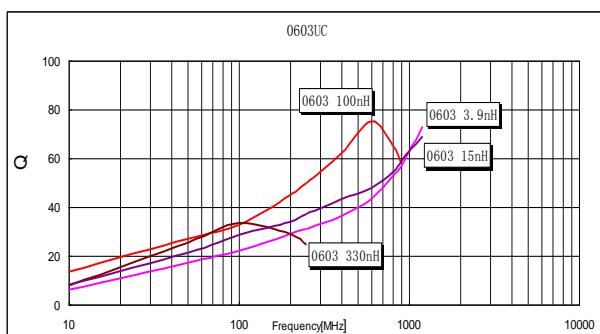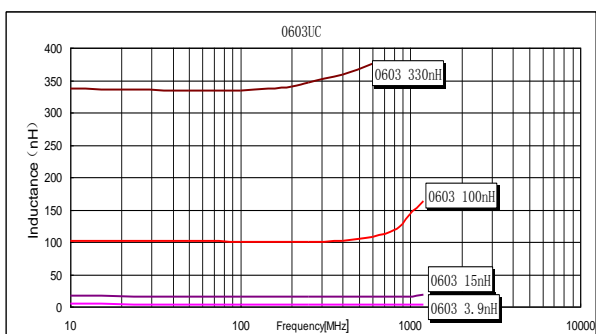


AHW0805 Type

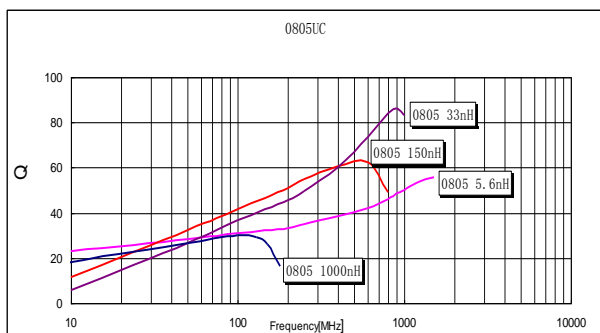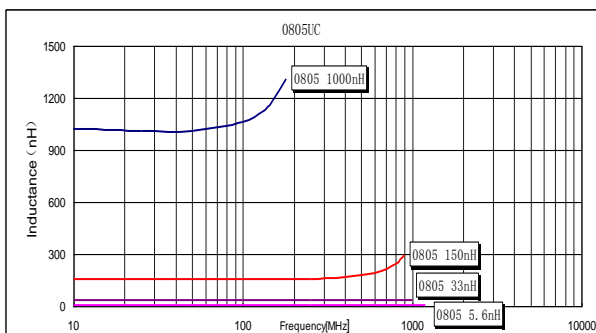


◆可靠性测试方法 Reliability Test Method

序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
1	高温存储 High Temperature Exposure (Storage)	无可见损伤; 电感量: $\Delta L/L \leq \pm 5\%$; Q 值: $\Delta Q/Q \leq \pm 20\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 5\%$; Q: $\Delta Q/Q \leq \pm 20\%$.	温度 125℃; 不通电; 持续时间 1000h; 试验结束后 (24±4)h 内进行电性能测量。 Temperature 125℃; Unpowered; Duration 1000h; Measurement at (24±4) hours after test conclusion.
2	温度循环 Temperature Cycling	无可见损伤; 电感量: $\Delta L/L \leq \pm 5\%$; Q 值: $\Delta Q/Q \leq \pm 20\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 5\%$; Q: $\Delta Q/Q \leq \pm 20\%$.	高温 125℃; 低温 -40℃; 高、低温下暴露时间各 30 分钟; 转换时间 ≤ 1min; 循环次数 1000 次。 试验结束后 24±4 小时内进行测试。 High Temperature +125℃; low temperature -40℃; Duration at each temperature 30 min; Transition time ≤ 1 min. Severity 1000 cycles; Measurement at 24±4 hours after test conclusion.
3	偏高湿度(高温高湿) Biased Humidity	无可见损伤; 电感量: $\Delta L/L \leq \pm 5\%$; Q 值: $\Delta Q/Q \leq \pm 20\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 5\%$; Q: $\Delta Q/Q \leq \pm 20\%$.	温度 85℃; 湿度 85RH%; 持续时间 1000 小时, 不通电。 试验结束后 24±4 小时内进行测试。 Temperature 85℃; Relative humidity 85%; Duration 1000 h; Unpowered. Measurement at 24±4 hours after test conclusion.
4	工作寿命 Operational Life	无可见损伤; 电感量: $\Delta L/L \leq \pm 5\%$; Q 值: $\Delta Q/Q \leq \pm 20\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 5\%$; Q: $\Delta Q/Q \leq \pm 20\%$.	温度 125℃; 施加电流: 额定电流; 持续时间: 1000 小时。 试验结束后 24±4 小时内进行测试。 Temperature 125℃; Test current: Rated current; Duration 1000 h; Measurement at 24±4 hours after test conclusion.
5	机械冲击 Mechanical Shock	无可见损伤; 电感量: $\Delta L/L \leq \pm 5\%$; Q 值: $\Delta Q/Q \leq \pm 20\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 5\%$; Q: $\Delta Q/Q \leq \pm 20\%$.	正半弦波; 峰值加速度 100g; 脉冲持续时间 6ms; 三轴六向各 3 次, 共 18 次。 Half sine wave. Peak value 100g. Normal duration 6 ms; Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks)

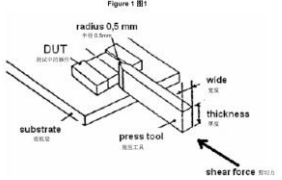
6	振动 Vibration	无可见损伤; 电感量: $\Delta L/L \leq \pm 5\%$; Q 值: $\Delta Q/Q \leq \pm 20\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 5\%$; Q: $\Delta Q/Q \leq \pm 20\%$.	频率 10Hz~2000Hz; 加速度 5g; 一个循环 20 分钟; X、Y、Z 三个方向每个方向 12 个循环,共 36 个循环; . The entire frequency range of 10 to 2000 Hz and return to 10 Hz shall be traversed in 20 minutes. This cycle shall be preformed 12 time in each of three mutually perpendicular directions (total of 36 times), so that the motion shall be applied for a total period of approximately 12 hours. Peak value 5g.
7	耐焊接热 Resistance to Soldering Heat	无可见损伤; 电感量: $\Delta L/L \leq \pm 5\%$; Q 值: $\Delta Q/Q \leq \pm 20\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 5\%$; Q: $\Delta Q/Q \leq \pm 20\%$.	模拟电磁器件回流焊, 3 次 Simulate electromagnetic device reflow soldering, 3 times
8	可焊性 Solder Ability	无可见损伤; 电极面 95%以上覆盖新的焊料(不包含焊点)。 95% or more of electrode area shall be coated by new solder (Except exposed wire) .	焊槽法; 无铅焊锡; 温度(245±5) °C; 浸渍时间 (3±0.3) s。 Solder bath; Lead-free solder; Temperature (245±5) °C; Immersion timer (3±0.3) seconds.
9	弯曲 Board Flex	无可见损伤; 直流电阻: 符合性能标准值. No Visible damage; Rdc: Meets performance standard values.	电感器安装在厚 1.6mm 环氧玻璃布板上, 以 1mm/s 的速度向下弯曲 2mm; 维持时间 60s±5s。 The testing samples shall be mounted on a 100mm×40mm FR4 PCB board, which is 1.6mm±0.2mm thick. Bending shall be applied to the 2.0mm with 1.0mm/sec; Duration: 60s(+5s).
10	端子强度 Terminal Strength (SMD)	无可见损伤; No Visible damage.	试样安装在环氧玻璃布板上, 施加 0402 规格: 5N, ≥0603 规格: 17.7N 的力到试样的侧面, 保持 60s±1s。 The testing samples shall be mounted on the testing epoxy boards, exerting force on side of the samples, Size 0402: 5N ; ≥ Size 0603: 17.7N, Duration 60s±1s. 

◆包装 Packaging

* 编带图 Taping drawings

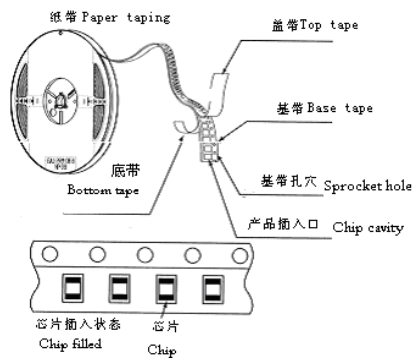


* 卷盘尺寸 Reel dimensions (Unit:mm)

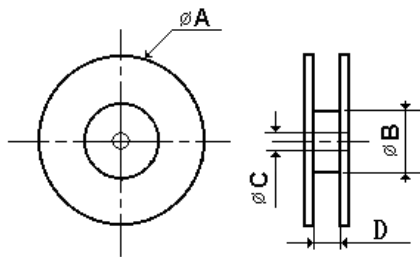


Part NO.	ϕA typ.	ϕB typ.	ϕC typ.	D typ.
0402-0805	178	60	13	8.4

* 导带及空格部分 Leader and blank portion

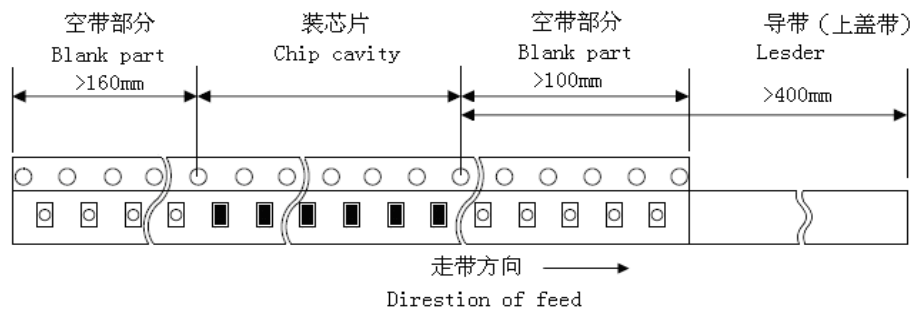


* 编带尺寸 Taping dimensions (Unit: mm)

纸带 Paper tape

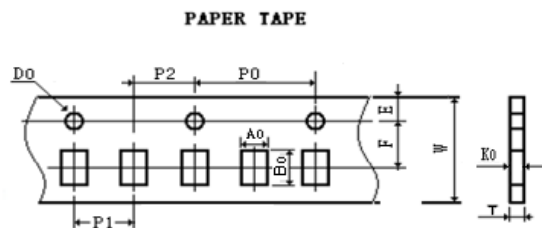



Part NO.	W	E	F	D0	P0	P1	P2	P0×10	A0	B0	K0	T
0402	8.00	1.75	3.50	1.55	4	2	2	40	0.74	1.23	0.60	0.75
0603	8.00	1.75	3.50	1.55	4	4	2	40	1.20	1.85	0.95	1.05

塑料胶带 Embossed tape

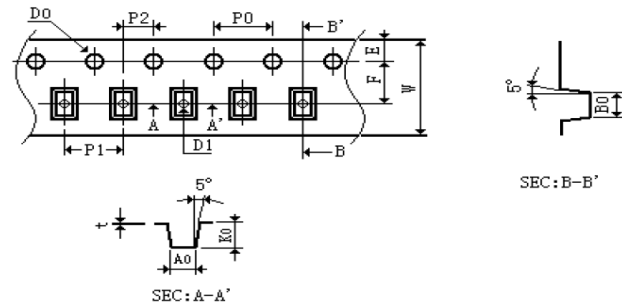

Part NO.	W	E	F	D0	D1	P0	P1	P2	P0×10	t	A0	B0	K0
0805	8.00	1.75	3.50	1.55	0.65	4	4	2	40	0.23	1.85	2.45	1.50

* 剥离力检验 Peeling off force

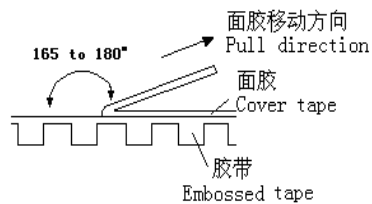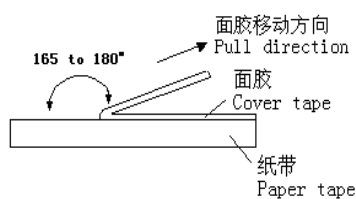

盖带的剥离力要求 Peeling required

0402~0805 series : 10g~80g

测试条件 Test condition

盖带剥离速度: 300mm/min±10%

盖带剥离角度: 165° ~180°

Speed of peeling off : 300mm/min±10%

Angle of peeling off: 165°~180°

* 包装数量 (单位: 粒) Packaging number (Unit: Pcs)

尺寸 Size		0402	0603	0805
每卷数量 Per Reel		5000	4000	3000
每盒数量 Per Box	3 卷盒	15000	12000	9000
	5 卷盒	25000	20000	15000
	10 卷盒	50000	40000	30000
每箱数量 Per Case	1.5 盒箱	75000	60000	45000
	2 盒箱	100000	80000	60000
	3 盒箱	150000	120000	90000
	4 盒箱	200000	160000	120000
	6 盒箱	300000	240000	180000

◆推荐焊接条件 Recommended Soldering Conditions

* 焊接条件 Soldering Conditions

本产品使用回流焊接法。

Applicable soldering process to the products is reflow soldering.

* 焊剂要求 Flux, Solder

使用松香基助焊剂，禁止使用卤化物含量超过 0.2(wt)%的强酸性助焊剂。

Don't use highly acidic flux with halide content exceeding 0.2(wt)%(chlorine conversion value).

使用无铅焊料(96.5Sn /3.0Ag/0.5Cu)。

Using lead-free solder (96.5Sn /3.0Ag/0.5Cu)。

* 焊接要求 Soldering conditions

预热时，产品表温与焊料温度的温差最大不允许超出 150℃，焊接完冷却时，产品表温与溶剂温度之间的温差最大不超过 100℃。预热不足有可能引发产品表面裂纹，从而导致产品品质下降。

Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150℃ max. Also cooling into solvent after soldering should be in such way that the temperature difference is limited to 100℃ max. Un-enough pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.

产品要在以下画出的曲线允许的范围进行焊接。其它焊接条件可能引起产品电极的腐蚀。当焊接重复时，允许的时间为第一次做的累计时间。

Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode. When soldering is repeated, allowable time is the accumulated time.

* 回流焊曲线 Reflow soldering profile

预热条件: 150~200℃/60~120 秒

Preheat condition: 150 ~200℃/60~120sec

最大温度: 260℃


max temp: 260 °C

最高温的最大时间: 10 秒

max time at max temp: 10 sec

回流焊次数: 最多 3 次

Allowed Reflow time: 3x max

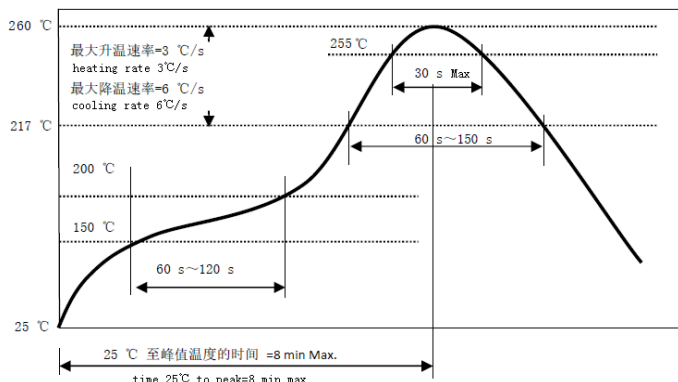

* 手工焊接 Iron soldering


烙铁温度: 350℃ (Max)

功率: 最大为 30W

烙铁停留时间: <5S (注意不要将烙铁碰到产品线圈及包封层)。

Perform soldering at 350℃ on 30W max.

Soldering Time: < 5S (Take care not to apply the tip of the soldering iron to the terminal electrodes)。

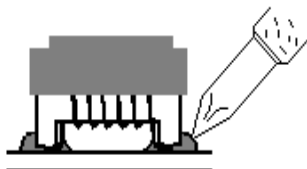

◆贮存方法 Storage Methods

* 存储期限 Storage period

距电感公司出厂检验时间 1 年内正常使用。若时间超过 1 年，应检查焊接性能后方可使用。

Please use the products within 1 year since the factory inspection before the delivery, the welding performance should be checked before use if the storage time exceeds 1 year.

* 存储条件 Storage conditions

存放货物的库房应满足以下条件：温度：-10 ~ +40℃，相对湿度：30 ~ 70%。

Products should be storage in the warehouse on the following conditions:

Temperature : -10~+40℃ Humidity: 30~70% relative humidity

* 禁止将产品保管在腐蚀性物质中，如硫磺、氯气或酸，否则将引起端头氧化，导致降低焊接性。Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidation of Electrodes resulting in poor solder ability.

* 为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。

Products should be stored on the pallet for the prevention of the influence from humidity, dust and so on.

* 产品保管在库房中，应避免热冲击、振动以及直接光照等等。

Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

* 产品应密封包装。

Products should be stored under the airtight packaged condition.

◆使用注意事项 Precautions For Use

* 本证书保证我司产品作为一个单体时的质量情况，当我司产品被安装到贵司产品上时请保证贵司的产品已根据贵司的规范进行了有效评价和确认。









This product specification guarantees the quality of our product as a single unit, Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.

* 如果贵司对我司产品的试用已超过了本测试规范所界定的产品功能，对于此所引发的失效我司将不予保证。

We can't warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.

* 为防止断线，请不要使用锋利的物体接触线圈，如镊子。

Do not touch wire with sharp objects such as tweezers to prevent wire breakage.

<p>正确方法 Correct method</p> <p>(夹端头两端 Tweezers should support on both sides of the chip)</p>	<p>错误方法 Wrongly method</p> <p>(夹到产品线圈 Tweezers should not support on enameled wire of the chip)</p>		
 	 	 	 

■ AHP 车规绕线型片式电感器

AHP Automotive Grade Wire Wound Chip Inductors

◆ 特征 Feature

- * 本产品满足 AEC-Q200 汽车标准相关条款

The products involved in this letter are compliant with AEC-Q200 standard.

- * 适合高密度表面贴装

Small Size Suitable For SMT.



◆ 应用 Application

- * 推荐用于汽车信息系统、影音娱乐系统、车身与舒适系统等。

recommended for automobile information system, audio-visual entertainment system, body and comfort system, etc.

- * 应用于同轴电源 (PoC)

Applications Power over Coaxial (PoC)

◆ 型号表示法 Part Number

AHP	0603	PF	1R0	K	S	T	BEG
①	②	③	④	⑤	⑥	⑦	⑧

① 产品类型 Product Type:

AHP: 车规绕线型片式电感器系列

AHP: Automotive Grade Wire Wound Inductor Series

② 尺寸 Dimensions: 0402(1.0×0.5mm)、0603(1.6×0.8mm)、0805(2.0×1.2mm)

③ 材料代号 Material Code: IF/PF---铁氧体芯 Ferrite core

④ 标称电感量 Inductance: R10=0.1μH、1R0=1.0μH、100=10μH


⑤ 标称电感值偏差 Tolerance: J---±5%; K---±10%; M---±20%

⑥ 电极表面镀层材料 Terminal: S---锡端头 Tin

⑦ 包装 Packaging: T: 编带包装 Tape & Reel

⑧ 设计代号 Design Code

◆ 产品结构 Product Structure

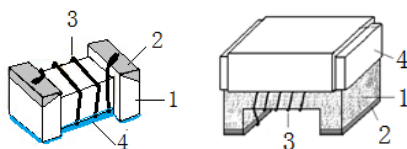

0402 Series


0603&0805 Series

序号 No.	部位 Component	材料 Material
1	磁芯Core	镍锌铁氧体Ni-Zn ferrite
2	电极Electrode	锡Sn
3	漆包线wire	铜Cu
4	包封层encapsulation layer	树脂UV Adhesive

◆ 规格尺寸 Dimension

单位 Unit: mm (inch)

Size	L (Max)	W (Max)	T (Max)	A(typ)	B(typ)	C(typ)	D(typ)	E(typ)
1005 (0402)	1.19 (0.047)	0.66 (0.026)	0.60 (0.024)	0.50 (0.020)	0.23 (0.009)	0.66 (0.026)	0.36 (0.014)	0.46 (0.018)
1608 (0603)	1.80 (0.071)	1.20 (0.047)	1.10 (0.043)	0.90 (0.035)	0.35 (0.014)	1.02 (0.040)	0.64 (0.025)	0.70 (0.028)
2012 (0805)	2.30 (0.091)	1.70 (0.067)	1.52 (0.060)	1.27 (0.050)	0.50 (0.020)	1.78 (0.070)	1.02 (0.040)	0.76 (0.030)

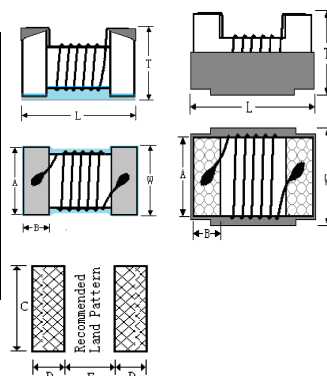

◆工作温度范围 Operating Temperature Range

工作温度范围,包括自身发热的上升温度: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$

Operating Temperature Range, Including self-heating temperature rise: $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$.

◆电性能参数 Electrical Characteristics

* 测试条件 Testing conditions

电感量 Inductance: HP4286A 或 E4982A 电桥或等同测量仪器, 测试电压 500mV。HP4286A or E4982A bridge or equivalent measuring instrument, test voltage 500mV.

直流电阻 Rdc: HP4286A、RM3542 或等同测量仪器。HP4286A、RM3542 or equivalent measuring instrument.

额定电流 Rated current: 施加额定电流, 产品表面温升不超过 40°C 。使用直流电流源、LCR 测试仪与温表测试。Apply the rated current, and the surface temperature rise of the product shall not exceed 40°C . Use a DC current source, LCR tester, and temperature gauge for testing.

0402IF Type

型号 Part NO	电感量 Inductance (μH)	偏差范围 Tolerance	自谐振频率 SRF (MHZ) Min	最大直流电阻 Rdc (Ω) Max	额定电流 Idc(mA) Max
AHP0402IFR18KST	0.18@100MHz	K	1000	0.312	560
AHP0402IFR27JST	0.27@100MHz	J	720	0.52	420
AHP0402IFR47JST	0.47@10MHz	J	380	0.66	350
AHP0402IFR88KST	0.88@1MHz	K	850	1.48	350
AHP0402IF1R2MST	1.2@1MHz	M	720	2.6	250

0603PF Type


型号 Part NO	电感量 Inductance (μH)	偏差范围 Tolerance	自谐振频率 SRF (MHZ) Min	最大直流电阻 Rdc (Ω) Max	额定电流 Idc(mA) Max
AHP0603PFR22KST	0.22@7.9MHz	K	1000	0.20	1000
AHP0603PFR27KST	0.27@7.9MHz	K	1000	0.30	1000
AHP0603PFR33KST	0.33@7.9MHz	K	1000	0.35	1000
AHP0603PFR47KST	0.47@7.9MHz	K	750	0.45	550
AHP0603PFR47KSTBEG	0.47@7.9MHz	K	800	0.25	1200
AHP0603PFR56KST	0.56@7.9MHz	K	700	0.48	500
AHP0603PFR62KST	0.62@7.9MHz	K	600	0.55	500
AHP0603PFR65KSTBEG	0.65@7.9MHz	K	600	0.55	500
AHP0603PFR82KSTBEG	0.82@7.9MHz	K	580	0.62	430
AHP0603PF1R0KSTBEG	1.0@7.9MHz	K	550	0.65	400
AHP0603PF1R0KSTCEG	1.0@7.9MHz	K	550	0.63	520
AHP0603PF1R5KSTBEG	1.5@7.9MHz	K	400	0.85	390
AHP0603PF2R2KSTBEG	2.2@7.9MHz	K	110	1.00	380
AHP0603PF2R2KSTCEG	2.2@7.9MHz	K	290	1.30	350
AHP0603PF2R2KSTEEG	2.2@7.9MHz	K	100	0.95	410
AHP0603PF3R3KSTBEG	3.3@7.9MHz	K	85	1.35	350
AHP0603PF4R7KSTBEG	4.7@7.9MHz	K	80	1.56	330

0805PF Type

型号 Part NO	电感量 Inductance (μ H)	偏差范围 Tolerance	自谐振频率 SRF (MHZ) Min	最大直流电阻 Rdc (Ω) Max	额定电流 Idc(mA) Max
AHP0805PFR47KSTBEG	0.47@7.9MHz	K	680	0.25	850
AHP0805PFR65KSTBEG	0.65@7.9MHz	K	560	0.25	820
AHP0805PFR82KST	0.82@7.9MHz	K	200	0.17	1300
AHP0805PF1R0KST	1.0@7.9MHz	K	200	0.17	1300
AHP0805PF1R2KSTBEG	1.2@7.9MHz	K	250	0.55	600
AHP0805PF1R5KSTBEG	1.5@7.9MHz	K	300	0.65	500
AHP0805PF2R2KSTBEG	2.2@7.9MHz	K	200	1.00	400
AHP0805PF3R3KSTBEG	3.3@7.9MHz	K	90	1.05	320
AHP0805PF4R7KSTBEG	4.7@7.9MHz	K	90	1.10	300

注：可根据客户需求做定制产品。Note: Customized products can be made according to customer needs.

* 电流降额 Current derating.

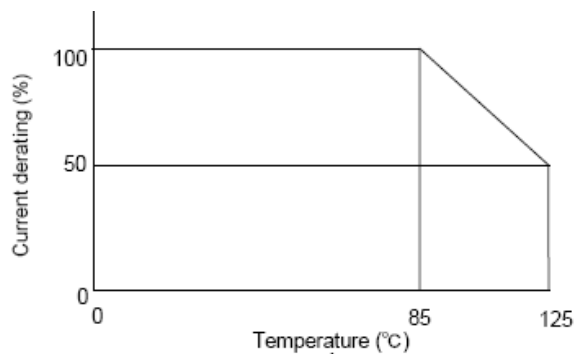


根据工作温度对额定电流进行降额使用。

Derating of Rated Current Depend on Operating Temperature.


◆ 产品特性曲线图 Product Characteristic Curve

* 阻抗频率曲线 Impedance frequency curve


0402 Series

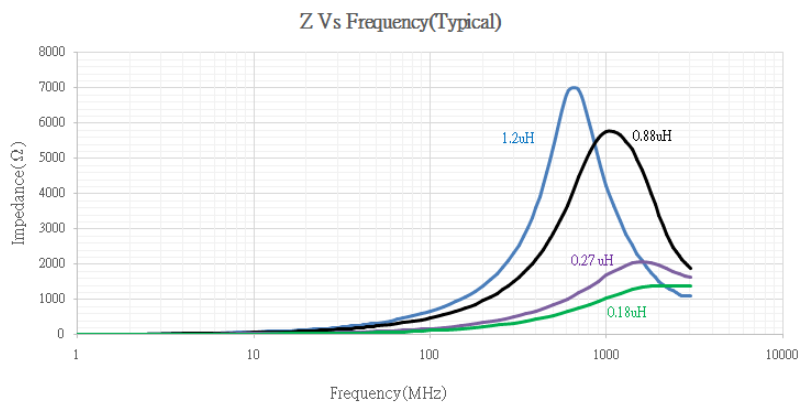

0603 Series

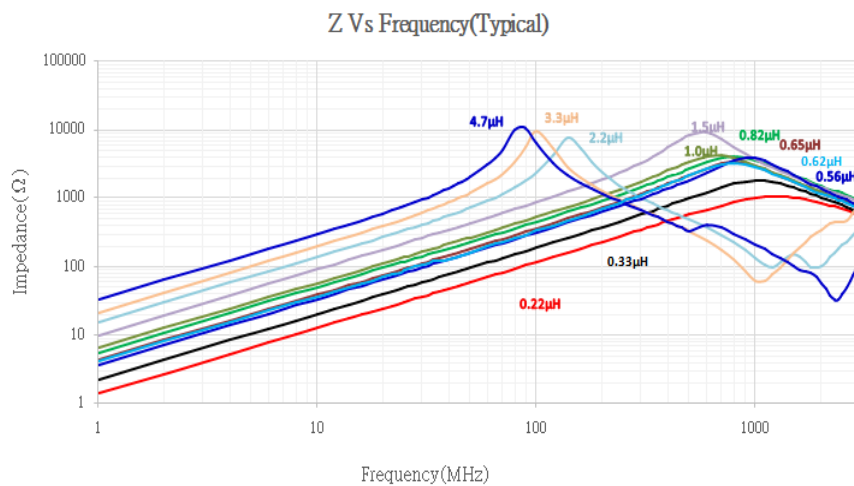


0805 Series

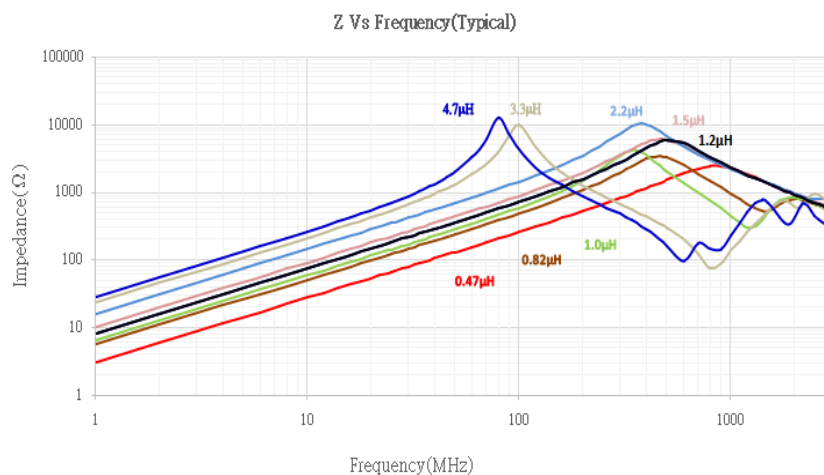


* 饱和电流曲线 Isat curve(25°C)


0402IFR27

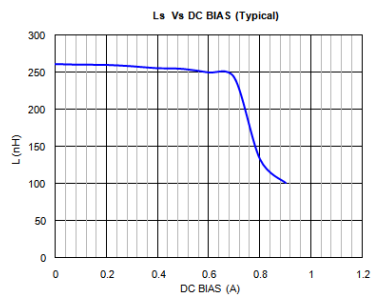


0402IF1R2

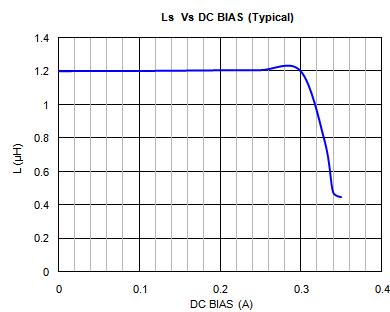


0603PFR65

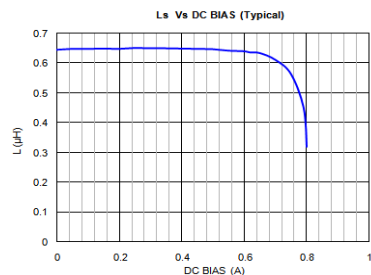


0603PFR82

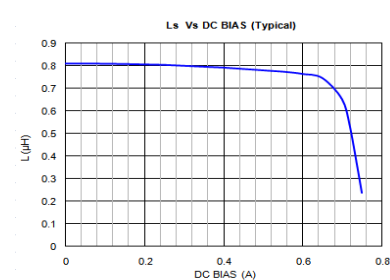


0603PF2R2

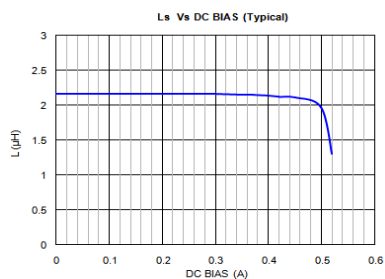


0603PF4R7

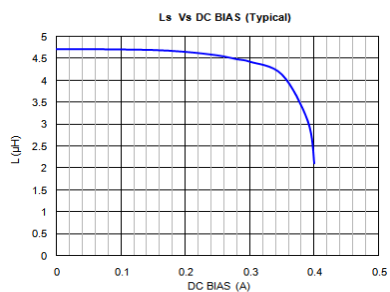


0805PFR47

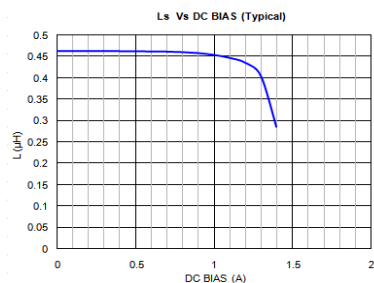


0805PFR82

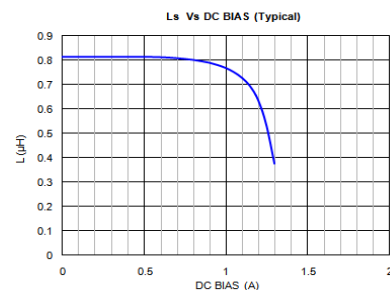

0805PF1R5


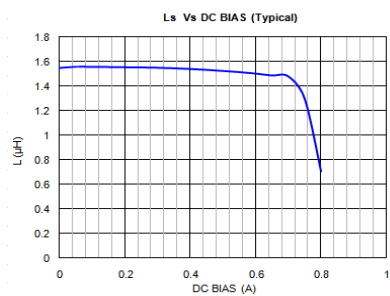


0805PF4R7

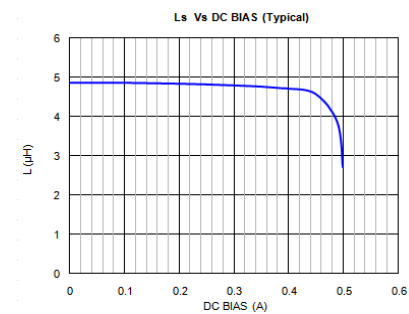


◆可靠性测试方法 Reliability Test Method

序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
1	高温存储 High Temperature Exposure (Storage)	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	温度 125℃; 不通电; 持续时间 1000h; 试验结束后 (24±4)h 内进行电性能测量。 Temperature 125℃; Unpowered; Duration 1000h; Measurement at (24±4) hours after test conclusion.
2	温度循环 Temperature Cycling	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	高温 125℃; 低温 -40℃; 高、低温下暴露时间各 30 分钟; 转换时间 ≤ 1min; 循环次数 1000 次。 试验结束后 24±4 小时内进行测试。 High Temperature +125℃; low temperature -40℃; Duration at each temperature 30 min; Transition time ≤ 1 min. Severity 1000 cycles; Measurement at 24±4 hours after test conclusion.
3	偏高湿度(高温高湿) Biased Humidity	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	温度 85℃; 湿度 85RH%; 持续时间 1000 小时, 不通电。 试验结束后 24±4 小时内进行测试。 Temperature 85℃; Relative humidity 85%; Duration 1000 h; Unpowered. Measurement at 24±4 hours after test conclusion.
4	工作寿命 Operational Life	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	温度 85℃; 施加电流: 额定电流; 持续时间: 1000 小时。 试验结束后 24±4 小时内进行测试。 Temperature 85℃; Test current: Rated current; Duration 1000 h; Measurement at 24±4 hours after test conclusion.
5	机械冲击 Mechanical Shock	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	正半弦波; 峰值加速度 100g; 脉冲持续时间 6ms; 三轴六向各 3 次, 共 18 次。 Half sine wave. Peak value 100g. Normal duration 6 ms; Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks)

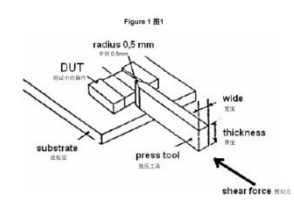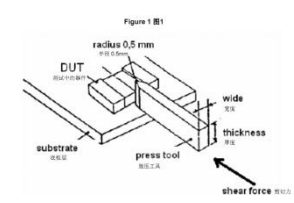
6	振动 Vibration	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	频率 10Hz~2000Hz; 加速度 5g; 一个循环 20 分钟; X、Y、Z 三个方向每个方向 12 个循环,共 36 个循环; . The entire frequency range of 10 to 2000 Hz and return to 10 Hz shall be traversed in 20 minutes. This cycle shall be preformed 12 time in each of three mutually perpendicular directions (total of 36 times), so that the motion shall be applied for a total period of approximately 12 hours. Peak value 5g.
7	耐焊接热 Resistance to Soldering Heat	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	模拟电磁器件回流焊, 3 次 Simulate electromagnetic device reflow soldering, 3 times
8	可焊性 Solder Ability	无可见损伤; 电极面 95%以上覆盖新的焊料(不包含焊点)。 95% or more of electrode area shall be coated by new solder (Except exposed wire) .	焊槽法; 无铅焊锡; 温度(245±5) °C; 浸渍时间 (3±0.3) s。 Solder bath; Lead-free solder; Temperature (245±5) °C; Immersion timer (3±0.3) seconds.
9	弯曲 Board Flex	无可见损伤; 直流电阻: 符合性能标准值. No Visible damage; Rdc: Meets performance standard values.	电感器安装在厚 1.6mm 环氧玻璃布板上, 以 1mm/s 的速度向下弯曲 2mm; 维持时间 60s±5s。 The testing samples shall be mounted on a 100mm×40mm FR4 PCB board, which is 1.6mm±0.2mm thick. Bending shall be applied to the 2.0mm with 1.0mm/sec; Duration: 60s(+5s)。 
10	端子强度 Terminal Strength (SMD)	无可见损伤; No Visible damage;	试样安装在环氧玻璃布板上, 施加 0402 规格: 2N, 0603 规格: 7N, 0805 规格: 13N 的力到试样的侧面, 保持 60s±1s。 The testing samples shall be mounted on the testing epoxy boards, exerting force on side of the samples, Size 0402: 2N ; Size 0603: 7N ; Size 0805: 13N, Duration 60s±1s. 

◆包装 Packaging

* 编带图 Taping drawings

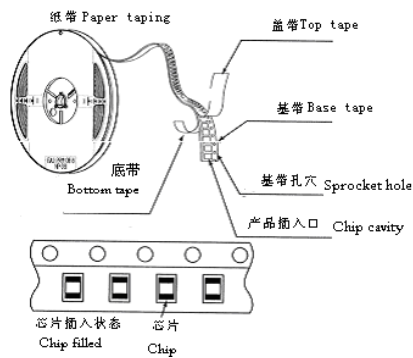


* 卷盘尺寸 Reel dimensions (Unit:mm)

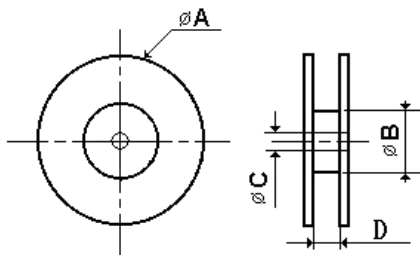


Part NO.	ΦA typ.	ΦB typ.	ΦC typ.	D typ.
0402-0805	178	60	13	8.4

* 导带及空格部分 Leader and blank portion

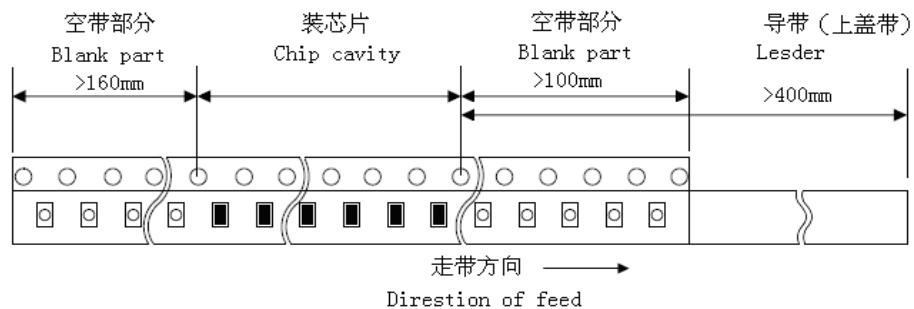


* 编带尺寸 Taping dimensions (Unit: mm)

纸带 Paper tape

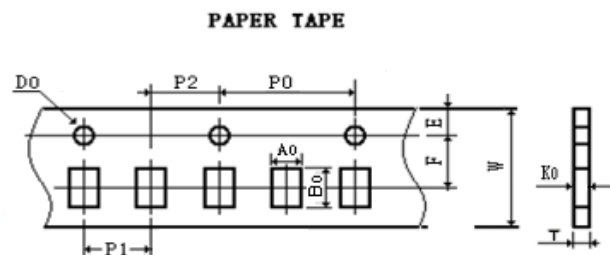


Part NO.	W	E	F	D0	P0	P1	P2	P0x10	A0	B0	K0	T
0402	8.00	1.75	3.50	1.55	4	2	2	40	0.66	1.20	0.60	0.75

塑料胶带 Embossed tape

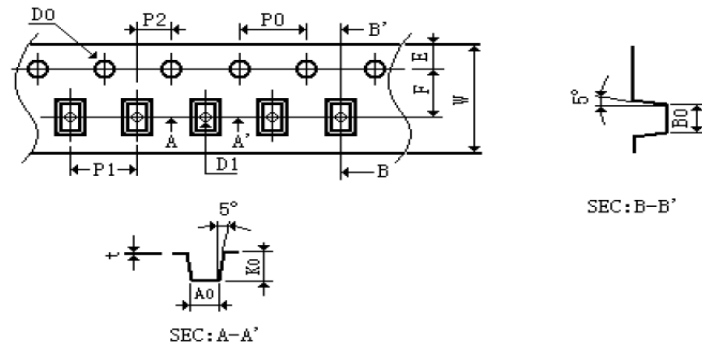

Part NO.	W	E	F	D0	D1	P0	P1	P2	P0×10	t	A0	B0	K0
0603	8.00	1.75	3.50	1.55	0.60	4	4	2	40	0.22	1.20	1.85	1.10
0805	8.00	1.75	3.50	1.55	0.65	4	4	2	40	0.23	1.85	2.45	1.50

* 剥离力检验 Peeling off force

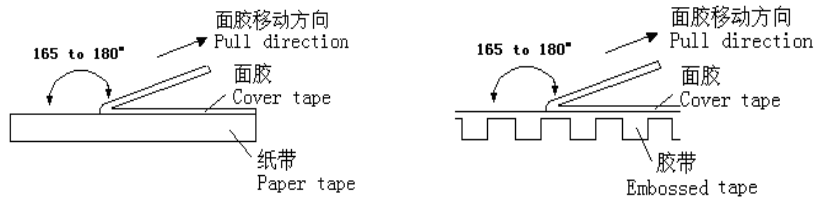

盖带的剥离力要求 Peeling required

0402-0805 series : 10g~80g

测试条件 Test condition

盖带剥离速度: 300mm/min±10%

Speed of peeling off : 300mm/min±10%

盖带剥离角度: 165° ~180°

Angle of peeling off: 165°~180°

* 包装数量 (单位: 粒) Packaging number (Unit: Pcs)

类型 Size		0402	0603	0805
每卷数量 Per Reel		5000	4000	3000
每盒数量 Per Box	3 卷盒	15000	12000	9000
	5 卷盒	25000	20000	15000
	10 卷盒	50000	40000	30000
每箱数量 Per Case	1.5 盒箱	75000	60000	45000
	2 盒箱	100000	80000	60000
	3 盒箱	150000	120000	90000
	4 盒箱	200000	160000	120000
	6 盒箱	300000	240000	180000

◆推荐焊接条件 Recommended Soldering Conditions

* 焊接条件 Soldering Conditions

本产品使用回流焊接法。

Applicable soldering process to the products is reflow soldering.

* 焊剂要求 Flux, Solder

使用松香基助焊剂，禁止使用卤化物含量超过 0.2(wt)%的强酸性助焊剂。

Don't use highly acidic flux with halide content exceeding 0.2(wt)%(chlorine conversion value).

使用无铅焊料(96.5Sn /3.0Ag/0.5Cu)。

Using lead-free solder (96.5Sn /3.0Ag/0.5Cu)。

* 焊接要求 Soldering conditions

预热时，产品表温与焊料温度的温差最大不允许超出 150℃，焊接完冷却时，产品表温与溶剂温度之间的温差最大不超过 100℃。预热不足有可能引发产品表面裂纹，从而导致产品品质下降。

Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150℃ max. Also cooling into solvent after soldering should be in such way that the temperature difference is limited to 100℃ max. Un-enough pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.

产品要在以下画出的曲线允许的范围内进行焊接。其它焊接条件可能引起产品电极的腐蚀。当焊接重复时，允许的时间为第一次做的累计时间。

Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode. When soldering is repeated, allowable time is the accumulated time.

* 回流焊曲线 Reflow soldering profile

预热条件: 150~200℃/60~120 秒

Preheat condition: 150 ~200℃/60~120sec

最大温度: 260℃


max temp: 260 °C

最高温的最大时间: 10 秒

max time at max temp: 10 sec

回流焊次数: 最多 3 次

Allowed Reflow time: 3x max

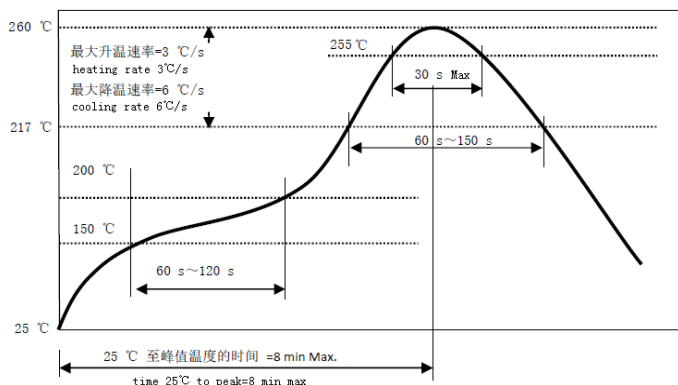

* 手工焊接 Iron soldering


烙铁温度: 350℃ (Max)

功率: 最大为 30W

烙铁停留时间: <5S (注意不要将烙铁碰到产品线圈及包封层)。

Perform soldering at 350℃ on 30W max.

Soldering Time: < 5S (Take care not to apply the tip of the soldering iron to the terminal electrodes)。

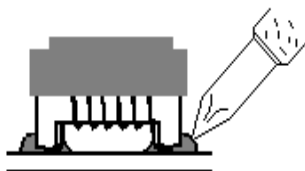

◆贮存方法 Storage Methods

* 存储期限 Storage period

距电感公司出厂检验时间 1 年内正常使用。若时间超过 1 年，应检查焊接性能后方可使用。

Please use the products within 1 year since the factory inspection before the delivery, the welding performance should be checked before use if the storage time exceeds 1 year.

* 存储条件 Storage conditions

存放货物的库房应满足以下条件：温度：-10 ~ +40℃，相对湿度：30 ~ 70%。

Products should be storage in the warehouse on the following conditions:

Temperature : -10~+40℃ Humidity: 30~70% relative humidity

* 禁止将产品保管在腐蚀性物质中，如硫磺、氯气或酸，否则将引起端头氧化，导致降低焊接性。Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidation of Electrodes resulting in poor solder ability.

* 为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。

Products should be stored on the pallet for the prevention of the influence from humidity, dust and so on.

* 产品保管在库房中，应避免热冲击、振动以及直接光照等等。

Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

* 产品应密封包装。

Products should be stored under the airtight packaged condition.

◆使用注意事项 Precautions For Use

* 本证书保证我司产品作为一个单体时的质量情况，当我司产品被安装到贵司产品上时请保证贵司的产品已根据贵司的规范进行了有效评价和确认。

This product specification guarantees the quality of our product as a single unit, Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.

* 如果贵司对我司产品的试用已超过了本测试规范所界定的产品功能，对于此所引发的失效我司将不予保证。

We can't warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.

* 为防止断线，请不要使用锋利的物体接触线圈，如镊子。

Do not touch wire with sharp objects such as tweezers to prevent wire breakage.

<p>正确方法 Correct method</p> <p>(夹端头两端 Tweezers should support on both sides of the chip)</p>	<p>错误方法 Wrongly method</p> <p>(夹到产品线圈 Tweezers should not support on enameled wire of the chip)</p>
 	     

■AHP1210SF 车规绕线型片式电感器

AHP1210SF Automotive Grade Wire Wound Chip Inductors

◆特征 Feature

- * 本产品满足 AEC-Q200 汽车标准相关条款

The products involved in this letter are compliant with AEC-Q200 standard.

- * 适合高密度表面贴装

Small Size Suitable For SMT.



◆应用 Application

- * 推荐用于汽车信息系统、影音娱乐系统、车身与舒适系统等。

Recommended for automobile information system, audio-visual entertainment system, body and comfort system, etc.

- * 应用于同轴电源 (PoC)

Applications Power over Coaxial (PoC)

◆型号表示法 Part Number

AHP	1210	SF	100	M	S	T
-----	------	----	-----	---	---	---

① ② ③ ④ ⑤ ⑥ ⑦

①产品类型 Product Type:

AHP: 车规绕线型片式电感器系列

AHP: Automotive Grade Wire Wound Inductor Series

②尺寸 Dimensions: 1210 (3.2×2.5mm)

③材料代号 Material Code: SF---铁氧体芯 Ferrite core


④标称电感量 Inductance: 1R0=1.0μH、100=10μH

⑤标称电感值偏差 Tolerance: M---±20%

⑥电极表面镀层材料 Terminal: S---锡端头 Tin

⑦包装 Packaging: T: 编带包装 Tape & Reel

◆产品结构 Product Structure

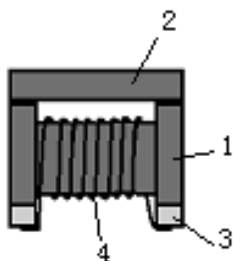


序号 No.	部位 Component	材料 Material
1	磁芯 Core	镍锌铁氧体 Ni-Zn ferrite
2	盖板 Cover plates	镍锌铁氧体 Ni-Zn ferrite
3	电极 Electrode	锡 Sn
4	漆包线 Wire	铜 Cu

◆规格尺寸 Dimension

单位 Unit: mm (inch)

Size	L (Max)	W (Max)	T (Max)	A(typ)	B(typ)	C(typ)	D(typ)	E(typ)
3225 (1210)	3.40 (0.134)	2.50 (0.098)	2.55 (0.100)	2.10 (0.083)	0.50 (0.020)	2.54 (0.100)	1.02 (0.040)	1.78 (0.070)

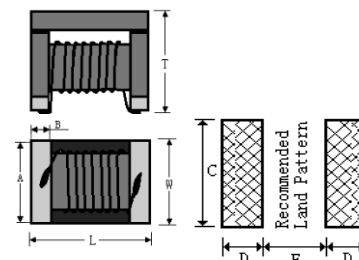

◆工作温度范围 Operating Temperature Range

工作温度范围: -40℃~+125℃

Operating Temperature Range: -40℃~+125℃

◆电性能参数 Electrical Characteristics

* 测试条件 Testing conditions

电感量 Inductance: HP4286A 或 E4982A 电桥或等同测量仪器, 测试电压 1V。HP4286A or E4982A bridge or equivalent measuring instrument, test voltage 1V.

直流电阻 Rdc: HP4286A、RM3542 或等同测量仪器。HP4286A、RM3542 or equivalent measuring instrument.

* 额定电流: 饱和电流或温升电流, 以较小者为准。

饱和电流 Isat: 施加此电流产品电感量变化率≤30%, 使用直流电流源、LCR 测试仪与温表测试。inductance will be within ±30% of nominal inductance value. Use a DC current source, LCR tester, and temperature gauge for testing.


温升电流 Irms: 施加此电流后产品温升 ΔT40℃ Max, 使用直流电流源、LCR 测试仪与温表测试。When rated current is applied to the products, temperature rise caused by self-generated heat shall be limited to 40℃ max. Use a DC current source, LCR tester, and temperature gauge for testing.

1210SF Type

型号 Part NO	电感量 Inductance (μH)	偏差范围 Tolerance	自谐振频率 SRF (MHZ) Min	最大直流电阻 Rdc (Ω) Max	饱和电流 Isat (mA) Max	温升电流 Irms (mA) Max
AHP1210SF2R2MST	2.2@1MHz	M	200	0.19	1000	1000
AHP1210SF2R7MST	2.7@1MHz	M	150	0.22	975	975
AHP1210SF3R3MST	3.3@1MHz	M	150	0.24	950	950
AHP1210SF3R9MST	3.9@1MHz	M	120	0.26	900	900
AHP1210SF4R7MST	4.7@1MHz	M	100	0.28	850	850
AHP1210SF100MST	10@1MHz	M	80	0.55	500	700
AHP1210SF220MST	22@1MHz	M	50	0.88	400	550
AHP1210SF470MST	47@1MHz	M	30	1.50	300	500

注: 可根据客户需求做定制产品。Note: Customized products can be made according to customer needs.

* 电流降额 Current derating.

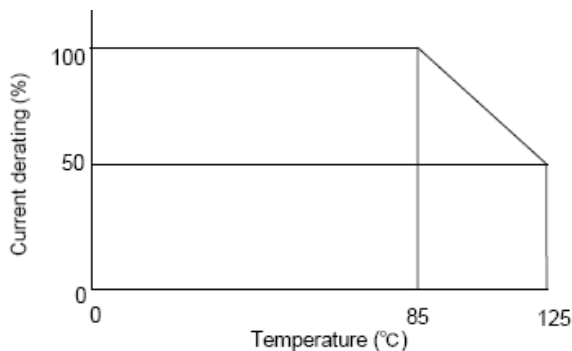

根据工作温度对额定电流进行降额使用。

Derating of Rated Current Depend on Operating Temperature.




◆ 产品特性曲线图 Product Characteristic Curve

1210SF2R2




1210SF4R7

1210SF100

* 阻抗频率曲线 Impedance frequency curve

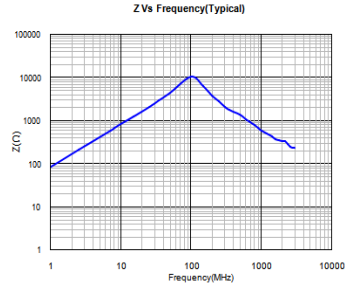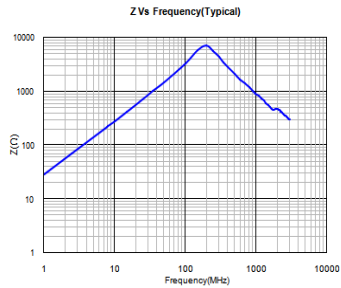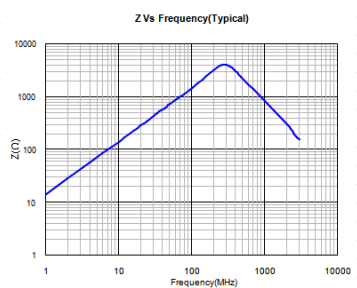


* 饱和电流曲线 Isat curve(25°C)

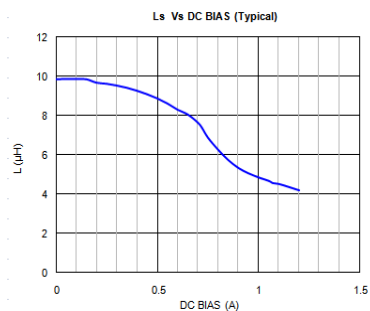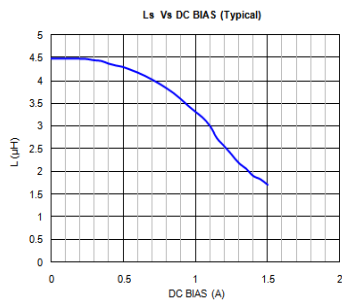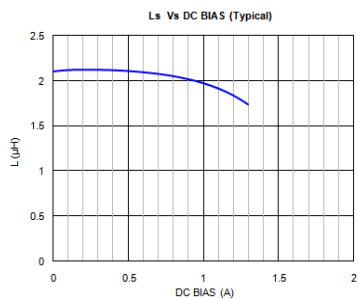


◆可靠性测试方法 Reliability Test Method

序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
1	高温存储 High Temperature Exposure (Storage)	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	温度 125℃; 不通电; 持续时间 1000h; 试验结束后 (24±4)h 内进行电性能测量。 Temperature 125℃; Unpowered; Duration 1000h; Measurement at (24±4) hours after test conclusion.
2	温度循环 Temperature Cycling	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	高温 125℃; 低温 -40℃; 高、低温下暴露时间各 30 分钟; 转换时间 ≤ 1min; 循环次数 1000 次。 试验结束后 24±4 小时内进行测试。 High Temperature +125℃; low temperature -40℃; Duration at each temperature 30 min; Transition time ≤ 1 min. Severity 1000 cycles; Measurement at 24±4 hours after test conclusion.
3	偏高湿度(高温高湿) Biased Humidity	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	温度 85℃; 湿度 85RH%; 持续时间 1000 小时, 不通电。 试验结束后 24±4 小时内进行测试。 Temperature 85℃; Relative humidity 85%; Duration 1000 h; Unpowered. Measurement at 24±4 hours after test conclusion.
4	工作寿命 Operational Life	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	温度 125℃; 施加电流: 额定电流; 持续时间: 1000 小时。 试验结束后 24±4 小时内进行测试。 Temperature 125℃; Test current: Rated current; Duration 1000 h; Measurement at 24±4 hours after test conclusion.
5	机械冲击 Mechanical Shock	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	正半弦波; 峰值加速度 100g; 脉冲持续时间 6ms; 三轴六向各 3 次, 共 18 次。 Half sine wave. Peak value 100g. Normal duration 6 ms; Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks)

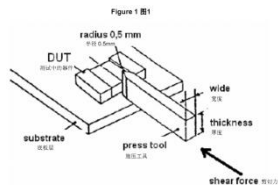
6	振动 Vibration	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	频率 10Hz~2000Hz; 加速度 5g; 一个循环 20 分钟; X、Y、Z 三个方向每个方向 12 个循环,共 36 个循环; . The entire frequency range of 10 to 2000 Hz and return to 10 Hz shall be traversed in 20 minutes. This cycle shall be preformed 12 time in each of three mutually perpendicular directions (total of 36 times), so that the motion shall be applied for a total period of approximately 12 hours. Peak value 5g.
7	耐焊接热 Resistance to Soldering Heat	无可见损伤; 电感量: $\Delta L/L \leq \pm 10\%$. No Visible damage; Inductance: $\Delta L/L \leq \pm 10\%$.	模拟电磁器件回流焊, 3 次 Simulate electromagnetic device reflow soldering, 3 times
8	可焊性 Solder Ability	无可见损伤; 电极面 95%以上覆盖新的焊料(不包含焊点)。 95% or more of electrode area shall be coated by new solder (Except exposed wire) .	焊槽法; 无铅焊锡; 温度(245±5) °C; 浸渍时间 (3±0.3) s。 Solder bath; Lead-free solder; Temperature (245±5) °C; Immersion timer (3±0.3) seconds.
9	弯曲 Board Flex	无可见损伤; 直流电阻: 符合性能标准值. No Visible damage; Rdc: Meets performance standard values.	电感器安装在厚 1.6mm 环氧玻璃布板上, 以 1mm/s 的速度向下弯曲 2mm; 维持时间 60s±5s。 The testing samples shall be mounted on a 100mm×40mm FR4 PCB board, which is 1.6mm±0.2mm thick. Bending shall be applied to the 2.0mm with 1.0mm/sec; Duration: 60s(+5s)。
10	端子强度 Terminal Strength (SMD)	无可见损伤; No Visible damage;	试样安装在环氧玻璃布板上, 施加 17.7N 的力到试样的侧面, 保持 60s±1s。 The testing samples shall be mounted on the testing epoxy boards, exerting force on side of the samples, Size 1210: 17.7N. Duration 60s±1s. 

◆包装 Packaging

* 编带图 Taping drawings

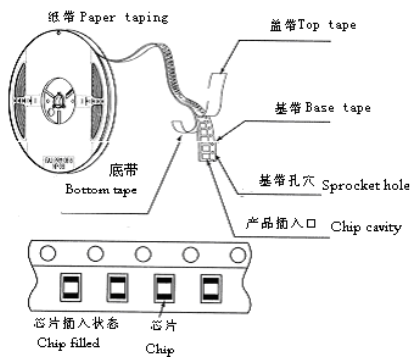


* 卷盘尺寸 Reel dimensions (Unit:mm)

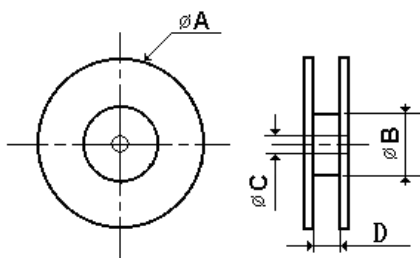


Part NO.	ΦA typ.	ΦB typ.	ΦC typ.	D typ.
1210	330	98	13	12.4

* 导带及空格部分 Leader and blank portion

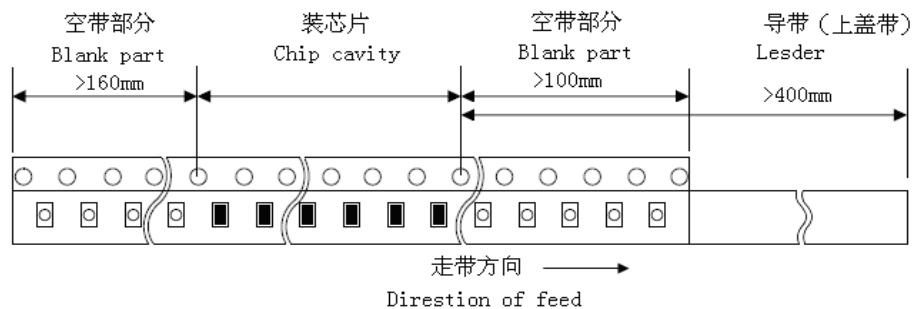



* 编带尺寸 Taping dimensions (Unit: mm)

塑料胶带 Embossed tape

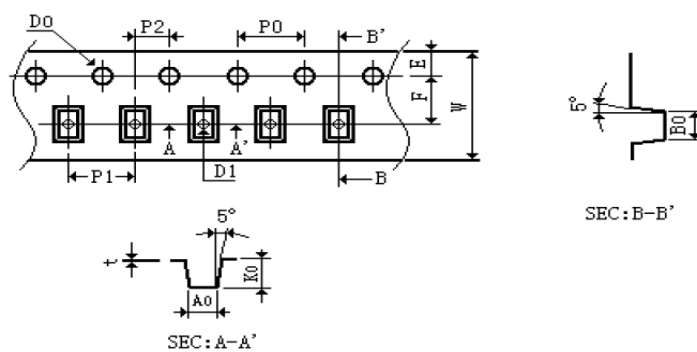

Part NO.	W	E	F	D0	D1	P0	P1	P2	P0×10	t	A0	B0	K0
1210	12.00	1.75	5.50	1.55	1.50	4	4	2	40	0.30	2.40	3.40	2.6

* 剥离力检验 Peeling off force

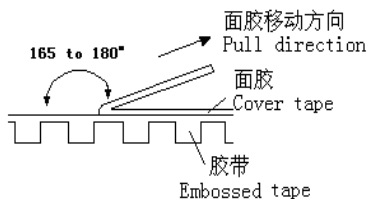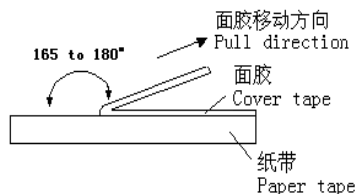

盖带的剥离力要求 Peeling required

1210 series : 10g~100g

测试条件 Test condition

盖带剥离速度: 300mm/min±10%

Speed of peeling off : 300mm/min±10%

盖带剥离角度: 165° ~180°

Angle of peeling off: 165°~180°

* 包装数量 (单位: 粒) Packaging number (Unit: Pcs)

类型 Size		1210
每卷数量 Per Reel		2000
每盒数量 Per Box	5 卷盒	8000
每箱数量 Per Case	大 3 盒箱	24000

◆推荐焊接条件 Recommended Soldering Conditions

* 焊接条件 Soldering Conditions

本产品使用回流焊接法。

Applicable soldering process to the products is reflow soldering.

* 焊剂要求 Flux, Solder

使用松香基助焊剂, 禁止使用卤化物含量超过 0.2(wt)%的强酸性助焊剂。

Don't use highly acidic flux with halide content exceeding 0.2(wt)%(chlorine conversion value).

使用无铅焊料(96.5Sn /3.0Ag/0.5Cu)。

Using lead-free solder (96.5Sn /3.0Ag/0.5Cu)。

* 焊接要求 Soldering conditions

预热时, 产品表温与焊料温度的温差最大不允许超出 150℃, 焊接完冷却时, 产品表温与溶剂温度之间的温差最大不超过 100℃。预热不足有可能引发产品表面裂纹, 从而导致产品品质下降。

Pre-heating should be in such a way that the temperature difference between solder and ferrite surface is limited to 150℃ max. Also cooling into solvent after soldering should be in such way that the temperature difference is limited to 100℃ max. Un-enough pre-heating may cause cracks on the ferrite, resulting in the deterioration of product quality.

产品要在以下画出的曲线允许的范围进行焊接。其它焊接条件可能引起产品电极的腐蚀。当焊接重复时, 允许的时间为第一次做的累计时间。

Products should be soldered within the following allowable range indicated by the slanted line. The excessive soldering conditions may cause the corrosion of the electrode. When soldering is repeated, allowable time is the accumulated time.

* 回流焊曲线 Reflow soldering profile

预热条件: 150~200°C/60~120 秒

Preheat condition: 150 ~200°C/60~120sec

最大温度: 260°C


max temp: 260 °C

最高温的最大时间: 10 秒

max time at max temp: 10 sec

回流焊次数: 最多 3 次

Allowed Reflow time: 3x max

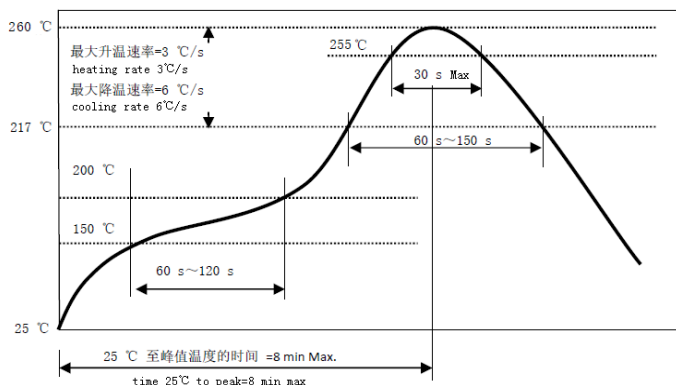

* 手工焊接 Iron soldering


烙铁温度: 350°C (Max)

功率: 最大为 30W

烙铁停留时间: <5S (注意不要将烙铁碰到产品线圈及封装层)。

Perform soldering at 350°C on 30W max.

Soldering Time: < 5S (Take care not to apply the tip of the soldering iron to the terminal electrodes)。

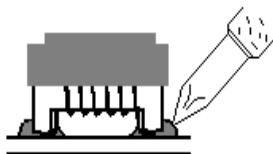

◆贮存方法 Storage Methods

* 存储期限 Storage period

距电感公司出厂检验时间 1 年内正常使用。若时间超过 1 年，应检查焊接性能后方可使用。

Please use the products within 1 year since the factory inspection before the delivery, the welding performance should be checked before use if the storage time exceeds 1 year.

* 存储条件 Storage conditions

存放货物的库房应满足以下条件: 温度: -10 ~ +40°C, 相对湿度: 30 ~ 70%。

Products should be storage in the warehouse on the following conditions:

Temperature : -10~+40°C Humidity: 30~70% relative humidity

* 禁止将产品保管在腐蚀性物质中, 如硫磺、氯气或酸, 否则将引起端头氧化, 导致降低焊接性。Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may case oxidization of Electrodes resulting in poor solder ability.

* 为了避免受潮气、灰尘等物质的影响, 产品应保管于货架上。

Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.

* 产品保管在库房中, 应避免热冲击、振动以及直接光照等等。

Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

* 产品应密封包装。

Products should be stored under the airtight packaged condition.

◆使用注意事项 Precautions For Use

* 本承认书保证我司产品作为一个单体时的质量情况, 当我司产品被安装到贵公司产品上时请保证贵司的产品已根据贵司的规范进行了有效评价和确认。

This product specification guarantees the quality of our product as a single unit, Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.

* 如果贵司对我司产品的试用已超过了本测试规范所界定的产品功能, 对于此所引发的失效我司将不予保证。

We can't warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.

* 为防止断线，请不要使用锋利的物体接触线圈，如镊子。

Do not touch wire with sharp objects such as tweezers to prevent wire breakage.

<p>正确方法 Correct method</p> <p>(夹端头两端 Tweezers should support on both sides of the chip)</p>	<p>错误方法 Wrongly method</p> <p>(夹到产品线圈 Tweezers should not support on enameled wire of the chip)</p>
 	     