


## ■HY 系列铝电解电容器

### HY Series Aluminum Electrolytic Capacitor

#### ◆特征

##### Feature

- \* 寿命: 105℃ 10000 小时  
Load life:105℃ 10000 hours.
- \* 符合 RoHS  
Compliant to the RoHS Directive.
- \* 符合 AEC-Q200  
Compliant to the AEC-Q200 Directive.

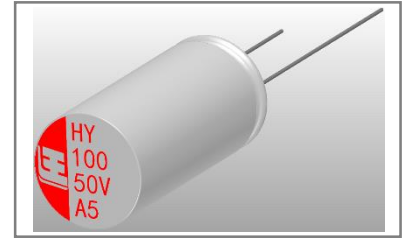

#### ◆应用


##### Application

- \* 适用于汽车模块电子产品  
Ideally suited for switching power supplies, telecommunication and other electronic products.

#### ◆型号表示法

##### Part Number

8	220	LF	M	AA06	HY	F	R	0	B	0	
代码 Code	产品类别 Type	代码 Code	电压 Voltage	代码 Code	尺寸 Dimensions ΦDxL(mm)	代码 Code	商标 Trademark	代码 Code	内码 Internal Code	代码 Code	产品脚型 Lead Forming Type
8	成品 Product	LC	16	AA06	Φ6.3x6	0	无商标	0	无印刷温度品, 贴片、闪光灯品,	0	散装品 Bulk
		LD	25	AA08	Φ6.3x8	F	FH			P	直脚方式 编带品 original type(vertical tape)
		LE	35	0810	Φ8x10						
		LF	50	1010	Φ10x10						
		LG	63								
		LH	80								
代码 Code	标称容量 Nominal Capacitance	代码 Code	误差 Tolerance	代码 Code	型号 Series	代码 Code	胶管颜色 Marking Color	代码 Code	内码 Internal Code		
100	10μF	K	±10%	HY	HY	R	红色 RED	B	汽车电子 Automotive electronics		
470	47μF	V	± <sup>20</sup> <sub>10</sub> %								
471	470μF	M	±20%								
		Q	± <sup>30</sup> <sub>10</sub> %								

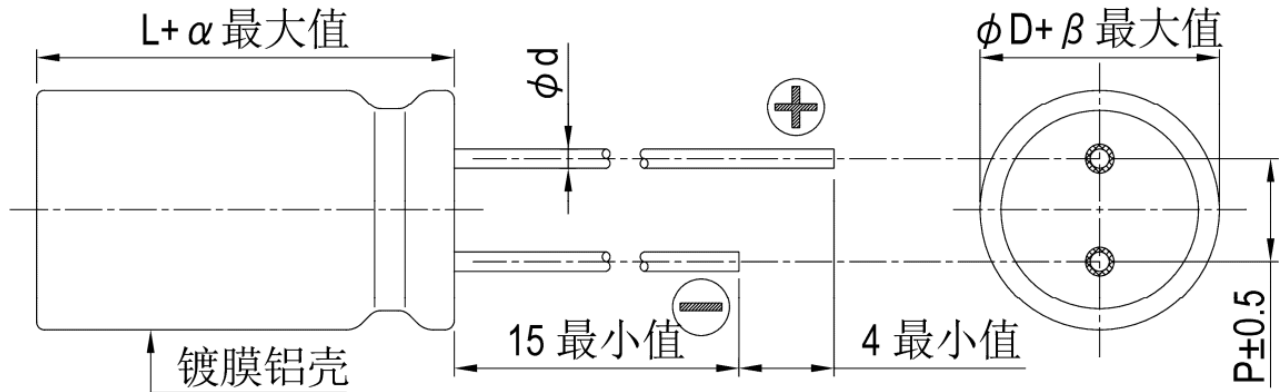**◆产品结构**
**Product Structure**


$\phi D$	L	P	$\phi d$	$\alpha$	$\beta$
6.3	6	2.5	0.5	1.0	0.5
6.3	8	2.5	0.5	1.0	0.5
8	10	3.5	0.6	1.0	0.5
10	10	5	0.6	1.0	0.5

**◆主要特性表**
**Main specifications**

项目 Item	主要特性 Performance Characteristics	
额定工作电压范围 Rated Voltage Range	16~80V.DC	
使用温度范围 Operating Temperature Range	-55°C~+105°C	
标称静电容量范围 Nominal Capacitance Range	10~470 $\mu$ F	
静电容量允许偏差 Capacitance Tolerance	$\pm 20\%$ (M, +20°C, 120Hz)	
漏电流 Leakage Current (20°C)	额定工作电压(V) Rated working voltage	16~80
	漏电流 Leakage current	2 分钟后 $I \leq 0.01CV$ 或 $10\mu A$ , 取较大值 After 2 min, $I \leq 0.01CV$ or $10\mu A$ , whichever is greater.
C: 标称静电容量 ( $\mu$ F) Nominal Capacitance in $\mu$ F V: 额定工作电压 (V) Rated working voltage in V		
损耗角正切值 Dissipation Factor	额定工作电压(V) Rated working voltage	16 25 35 50 63 80
	DF(MAX) (20°C, 120Hz)	0.16 0.14 0.12 0.10 0.08 0.08

浪涌电压 Surge Voltage	<table><tr><td>额定工作电压(V) Rated working voltage</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td></tr><tr><td>浪涌电压 Surge voltage (V)</td><td>18.4</td><td>28.8</td><td>40.3</td><td>57.5</td><td>72.5</td><td>92</td></tr></table>							额定工作电压(V) Rated working voltage	16	25	35	50	63	80	浪涌电压 Surge voltage (V)	18.4	28.8	40.3	57.5	72.5	92																												
	额定工作电压(V) Rated working voltage	16	25	35	50	63	80																																										
	浪涌电压 Surge voltage (V)	18.4	28.8	40.3	57.5	72.5	92																																										
	施加表中所列浪涌电压，充电 30±5 秒，放电 5.5±0.5 分钟作为一个周期，共进行 1000 次。测试温度：15℃-35℃。然后在标准大气条件下放置达到热稳定，测试各参数。 Application of DC surge Voltage stated at table,1000 times of charging for 30±5 sec., discharging with a period of 5.5±0.5 min. Test temperature: 15℃-35℃ And the capacitor shall be stored under standard atmospheric conditions to obtain thermal stability, after which measurements shall be made.																																																
	容量变化：在初始值的±30%以内。 Capacitance change: Within ± 30% of the initial value																																																
	损耗角正切值：≤200%不大于规定值。 Dissipation factor: Not more than 200% of the specified value.																																																
	ESR：≤200%不大于规定值。 ESR: Not more than 200% of the specified value.																																																
	漏电流：不大于规定值。 Leakage current: Not more than the specified value																																																
温度特性 Temperature Characteristic	电容器根据下表的次序处理，放置在每一温度下，待阻抗或电容量稳定后方可测试。 The capacitor shall be subjected in turn to the procedures specified below. The capacitor should be stored at each temperature until measured impedance or capacitance are stabilized.																																																
	<table><tr><td>阶段 Step</td><td colspan="2">温度 Temperature</td><td colspan="4">时间 Time</td></tr><tr><td>1</td><td colspan="2">20±2℃</td><td colspan="4">热平衡状态 Thermal balance</td></tr><tr><td>2</td><td colspan="2">-55±2℃</td><td colspan="4">2 hours</td></tr><tr><td>3</td><td colspan="2">20±2℃</td><td colspan="4">热平衡状态 Thermal balance</td></tr><tr><td>4</td><td colspan="2">105±2℃</td><td colspan="4">2 hours</td></tr><tr><td>5</td><td colspan="2">20±2℃</td><td colspan="4">热平衡状态 Thermal balance</td></tr></table>							阶段 Step	温度 Temperature		时间 Time				1	20±2℃		热平衡状态 Thermal balance				2	-55±2℃		2 hours				3	20±2℃		热平衡状态 Thermal balance				4	105±2℃		2 hours				5	20±2℃		热平衡状态 Thermal balance			
	阶段 Step	温度 Temperature		时间 Time																																													
	1	20±2℃		热平衡状态 Thermal balance																																													
	2	-55±2℃		2 hours																																													
	3	20±2℃		热平衡状态 Thermal balance																																													
	4	105±2℃		2 hours																																													
	5	20±2℃		热平衡状态 Thermal balance																																													
	阶段 1：测定容量，损耗和阻抗值。 Step 1: Capacitance, Dissipation Factor and impedance shall be measured.																																																
	阶段 2：放置 2 小时后，达到热平衡状态再测定容量，损耗和阻抗值。 Step 2: After the capacitor being stored for 2 hours, Capacitance, Dissipation Factor and impedance shall be Measured. The measurement shall be made at thermal stability.																																																
阶段 4：放置 2 小时后，达到热平衡状态再测定容量，损耗和阻抗值。 Step 4: After the capacitor being stored for 2 hours, Capacitance, Dissipation Factor and impedance shall be Measured. The measurement shall be made at thermal stability.																																																	
阶段 2：阻抗比 Step 2: Impedance ratio																																																	
<table><tr><td colspan="2">额定工作电压(V) Rated working voltage</td><td colspan="5">16~80</td></tr><tr><td>阻抗比(100kHz)</td><td colspan="2">Z(-25℃)/Z(+20℃)</td><td colspan="4">1.5</td></tr><tr><td>Impedance Ratio</td><td colspan="2">Z(-55℃)/Z(+20℃)</td><td colspan="4">2.0</td></tr></table>							额定工作电压(V) Rated working voltage		16~80					阻抗比(100kHz)	Z(-25℃)/Z(+20℃)		1.5				Impedance Ratio	Z(-55℃)/Z(+20℃)		2.0																									
额定工作电压(V) Rated working voltage		16~80																																															
阻抗比(100kHz)	Z(-25℃)/Z(+20℃)		1.5																																														
Impedance Ratio	Z(-55℃)/Z(+20℃)		2.0																																														
静电容量变化率：阶段 1 的±30% Capacitance change: within ±30% of step 1																																																	
阶段 4 (Step 4)：漏电流：规定值 5 倍以下 Leakage Current: Less than 500% of specified value.																																																	

<p>高温负荷 High Temperature Operating Life</p>	<p>试验温度: <math>105\pm 2^{\circ}\text{C}</math>, 施加额定电压和额定纹波电流            试验时间: 10000 小时            Test temperature: <math>105\pm 2^{\circ}\text{C}</math>, Application of the rated voltage and rated ripple current.            Test time: 10000h</p> <p>外观: 无异状            Appearance: No remarkable abnormality            容量变化: 在初始值<math>\pm 30\%</math>范围内            Capacitance change: Within <math>\pm 30\%</math> of the initial value            损耗角正切值: <math>\leq 200\%</math>规定值            Dissipation factor: <math>\leq 200\%</math> of the specified value            ESR: <math>\leq 200\%</math>规定值            ESR: <math>\leq 200\%</math> of the specified value            漏电流: 不大于规定值            Leakage current: <math>\leq</math>specified value</p>
<p>高温贮存 High Temperature Exposure (Storage)</p>	<p>试验温度: <math>105\pm 2^{\circ}\text{C}</math>环境下无负荷贮存            试验时间: 1000 小时            Test temperature: without voltage load at <math>105\pm 2^{\circ}\text{C}</math>            Test time : 1000h</p> <p>外观: 无异状            Appearance: No remarkable abnormality            容量变化: 在初始值<math>\pm 30\%</math>范围内            Capacitance change: Within <math>\pm 30\%</math> of the initial value.            损耗角正切值: <math>\leq 200\%</math>规定值            Dissipation factor: <math>\leq 200\%</math> of the specified value            ESR: <math>\leq 200\%</math>规定值            ESR: <math>\leq 200\%</math> of the specified value            漏电流: <math>\leq</math>规定值            Leakage current: <math>\leq</math>specified value</p>
<p>温度循环 Temperature Cycling</p>	<p>试验温度: 高温: 上限类别温度、低温: 下限类别温度; 高低温暴露时间: 各 30 分钟; 转换时间: 小于 1 分钟; 循环次数: 1000 次; 试验结束后 (<math>24\pm 4</math>) 小时内进行测试。            Expose to the upper and lower category temperatures for 30 minutes each, with a transition time of less than 1 minute between high and low temperatures, and cycle 1000 times. The test shall be conducted within <math>24\pm 4</math> hours after the end of the experiment.</p> <p>外观: 无可见损伤和电解质漏出            Appearance: No remarkable damage and electrolyte leakage            容量变化: 在初始值<math>\pm 30\%</math>范围内            Capacitance change: Within <math>\pm 30\%</math> of the initial value.            损耗角正切值: <math>\leq 200\%</math> 规定值            Dissipation factor: <math>\leq 200\%</math> of the specified value            ESR: <math>\leq 200\%</math>规定值            ESR: <math>\leq 200\%</math> of the specified value            漏电流: 不大于规定值    Leakage current: <math>\leq</math>specified value</p>

<p>耐溶剂性 Solvent Resistance</p>	<p>三种溶剂：</p> <p>溶剂 a、在 20°C~30°C按下述配方构成混合溶剂：1）一份体积的分析纯异丙醇；2）三份体积的 80%体积的煤油和 20%体积的乙苯构成的混合液；</p> <p>溶剂 b、三氯三氟乙烷，半水溶性的溶剂；</p> <p>溶剂 c、在 63°C~70°C，按下述配方构成混合溶剂；1）42 份体积的去离子水；</p> <p>2）一份体积的乙二醇-丁醚；3）一份体积的单乙醇胺；</p> <p>将样品分成 3 组，分别浸在 a、b、c 三种溶剂 3min 后擦拭 10 次；擦拭后，立即按上述方法再重复 2 回，浸、刷共 3 回。然后用水洗清洗剂进行清洗，并在室温下对整个表面进行通风干燥。</p> <p>The solvent solutions used in this test shall consist of the following:</p> <p>Solvent a: A mixture consisting of the following at 20°C~30°C:</p> <p>1) One part by volume of isopropyl alcohol.</p> <p>2) Three parts by volume of a mixture of 80% by volume of kerosene and 20% by volume ethyl benzene.</p> <p>Solvent b: Trichlorotrifluoroethane, semi water-soluble solvents.</p> <p>Solvent c: A mixture consisting of the following at 63°C~70°C:</p> <p>1) Forty-two parts by volume of deionized water.</p> <p>2) One part by volume of ethylene glycol butyl ether.</p> <p>3) One part by volume of monoethanolamine.</p> <p>The specimens subjected to this test shall be divided into three groups of approximately equal size, were immersed in a, b, c three solvents solutions. The specimens shall be completely immersed for 3 minutes, immediately following immersing, each specimen shall be tested as follows: The bristle portion of the brush, shall be dipped in the solution until wetted and the specimen shall be brushed with normal hand pressure (approximately 2 to 3 ounce applied normal to the surface) for ten strokes on the portion of the specimen where has been applied. The brush stroke shall be directed in a forward direction across the surface of the specimen being tested. Immediately after brushing, the procedure shall be repeated two more times, for a total of three immersions, followed by brushing. After completion of the third immersion and brushing, the specimens shall be rinsed in approximately 25°C water and all surfaces sir-blown dry.</p> <p>外观：无异状 Appearance: No remarkable abnormality</p> <p>容量变化：在初始值±3%范围内 Capacitance change: Within ±3% of the initial value.</p> <p>损耗角正切值：不大于规定值 Dissipation factor: ≤ specified value</p> <p>ESR：不大于规定值 ESR: ≤ specified value</p> <p>漏电流：不大于规定值 Leakage current: ≤ specified value</p>
------------------------------------	---

耐焊接热 Resistance to Soldering Heat	焊锡温度：260±5℃，浸入时间：10±1 秒，浸入深度：1.5mm Solder bath temperature : 260±5℃,Immersion time : 10±1s. Immersion depth: 1.5mm  容量变化：在初始值±3%范围内 Capacitance change: Within ±3% of the initial value. 损失角正切值：不大于规定值 Dissipation factor: ≤specified value 漏电流：不大于规定值 Leakage current: ≤specified value									
可焊性 Solderability	焊锡温度：235±5℃，浸入时间：(3±0.3)秒 Solder Temperature: 235±5℃, Solder Immersion Time:(3±0.3) sec.  浸入焊锡的引线表面积约 95%以上应附着新锡。 At least 95% of circumferential surface of the dipping portion of terminal shall be covered with new solder. 外观：无可见机械损伤 Appearance: no visible mechanical damage									
高温高湿 Biased Humidity	试验电压：额定电压 Test voltage: rated voltage 试验温湿度：85℃，85%RH Test temperature and humidity : 85℃, 85%RH 试验时间：1000 小时 Test time :1000 h 试验结束后 24±4 小时后进行测试 Measurement at 24±4 hours after test.  外观：绝缘套管的剥落、剥落、碎裂、起泡或收缩是可以接受的。 Appearance: Peeling, flaking, chipping, bubbling or shrinking of insulation sleeve is acceptable. 容量变化：在初始值±20%范围内 Capacitance change: Within ±20% of the initial value. 损耗角正切值：≤150% 规定值 Dissipation factor: ≤ 150% of specified value ESR：≤150% 规定值 ESR: ≤ 150% of specified value 漏电流：≤规定值 Leakage current: ≤ specified value									
端子强度 Terminal Strength	电容器引脚向下，固定电容器本体，在引脚上静态负重至规定时间，符合以下要求： Fixing capacitor body and pins down, static load on the pins to the specified time, meets the following requirements <table><tr><td>电容器引线直径(mm) diameter of pin</td><td>负重(N) weight</td><td>负重时间(s) load time</td></tr><tr><td>d≤0.5</td><td>5</td><td>10±1</td></tr><tr><td>0.5&lt;d≤0.8</td><td>10</td><td>10±1</td></tr></table>	电容器引线直径(mm) diameter of pin	负重(N) weight	负重时间(s) load time	d≤0.5	5	10±1	0.5<d≤0.8	10	10±1
电容器引线直径(mm) diameter of pin	负重(N) weight	负重时间(s) load time								
d≤0.5	5	10±1								
0.5<d≤0.8	10	10±1								

	<p>外观：无可见机械损伤</p> <p>Appearance: no visible mechanical damage</p> <p>电容器应无接触不良开路或短路</p> <p>The capacitor shall be no intermittent contacts, or open or short circuiting</p>
<p>振动试验</p> <p>Resistance To Vibration</p>	<p>在 X、Y、Z 三个互相垂直的方向分别进行 12 个循环，共 36 个循环，一个循环 20 分钟。</p> <p>频率：10-2000Hz</p> <p>加速度：5g.</p> <p>Perform 12 cycles in X, Y, and Z directions perpendicular to each other, for a total of 36 cycles, each lasting 20 minutes.</p> <p>Vibration frequency range: 10-2000Hz</p> <p>Acceleration: 5g</p> <p>外观：无可见机械损伤</p> <p>Appearance: No visible mechanical damage</p> <p>容量变化：在初始值<math>\pm 3\%</math>范围内</p> <p>Capacitance change: Within <math>\pm 3\%</math> of the initial value.</p> <p>损耗角正切值：不大于规定值</p> <p>Dissipation factor: <math>\leq</math> specified value</p> <p>ESR：不大于规定值</p> <p>ESR: <math>\leq</math> specified value</p> <p>漏电流：不大于规定值</p> <p>Leakage current: <math>\leq</math> specified value</p>
<p>机械冲击</p> <p>Mechanical Shock</p>	<p>脉冲波形：正半弦波；峰值加速度：100g；脉冲持续时间：6ms；三个轴六个向各 3 次，共 18 次，电容器的性能符合下面要求：</p> <p>Waveform: Half-sine, Peak value: 100g, Normal duration: 6ms Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). Capacitors meet the characteristics listed as below.</p> <p>外观：无可见机械损伤</p> <p>Appearance: No visible mechanical damage</p> <p>电容量变化率：<math>\pm 3\%</math>初始测量值以内</p> <p>Capacitance change: Within <math>\pm 3\%</math> of the initial value.</p> <p>损耗角正切值<math>\leq</math>规定值</p> <p>Dissipation factor: <math>\leq</math>specified value</p> <p>ESR：不大于规定值</p> <p>ESR: <math>\leq</math> specified value</p> <p>漏电流: <math>\leq</math>规定值</p> <p>Leakage current:<math>\leq</math> specified value</p>

※当产生疑问的时候，用以下电压处理后测试漏电流。

电压处理：105℃下，连续加载电压 120 分钟。加载电压为额定电压。

※Note: If any doubt arises, measure the leakage current after following voltage application treatment.

Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105℃.

#### ◆尺寸表、允许纹波电流、纹波电流频率因子

Dimensions and ripple current and frequency coefficient

\* 纹波电流频率修正系数

Ripple current frequency coefficient

频率 Frequency(Hz)	120≤频率<1k	1k≤频率<10k	10k≤频率<50k	50k≤频率<100k	100k≤频率<500k
系数 Coefficient	0.1	0.30	0.60	0.85	1.00

\* 尺寸表与允许纹波电流

Dimensions and ripple current

Rated voltage 额定电压(V)	Rated capacitance 标称容量(μF)	Case size 尺寸 D×L(mm)	Leakage current 漏电流(μA)	ESR(mΩ) 等效串联电阻 at 20°C, 100 kHz	Rated ripple current 额定纹波电流 (mArms/105°C/100kHz)
16(LC)	82	6.3×6	13.1	50	1300
	150	6.3×8	24.0	30	2000
	270	8×10	43.2	27	2300
	470	10×10	75.2	20	2500
25(LD)	47	6.3×6	11.8	50	1300
	56	6.3×6	14.0	50	1300
	68	6.3×8	17.0	30	2000
	100	6.3×8	25.0	30	2000
	150	8×10	37.5	27	2300
	220	8×10	55.0	27	2300
	330	10×10	82.5	20	2500
35(LE)	27	6.3×6	10.0	60	1300
	33	6.3×6	11.6	60	1300
	47	6.3×8	16.5	60	1300
	68	6.3×8	23.8	35	2000
	100	8×10	35.0	27	2300
	150	8×10	52.5	27	2300
	220	10×10	77.0	20	2500
	270	10×10	94.5	20	2500
50(LF)	22	6.3×6	11.0	80	1100
	33	6.3×8	16.5	40	1600
	47	8×10	23.5	30	1800
	68	8×10	34.0	30	1800
	100	10×10	50.0	28	2000
63(LG)	10	6.3×6	10.0	120	1000
	22	6.3×8	13.9	80	1500
	27	8×10	17.0	40	1700
	33	8×10	20.8	40	1700



Rated voltage 额定电压(V)	Rated capacitance 标称容量(μF)	Case size 尺寸 D×L(mm)	Leakage current 漏电流(μA)	ESR(mΩ) 等效串联电阻 at 20°C, 100 kHz	Rated ripple current 额定纹波电流 (mArms/105°C/100kHz)
63(LG)	47	8×10	29.6	40	1700
	56	10×10	35.3	30	1800
	68	10×10	42.8	30	1800
	82	10×10	51.7	30	1800
80(LH)	22	8×10	17.6	45	1550
	33	10×10	26.4	36	1700
	47	10×10	37.6	36	1700

### ◆包装

#### Packaging

包装标签内容      Package label content

- |              |                       |            |                                |
|--------------|-----------------------|------------|--------------------------------|
| 1) 客户物料号 P/N | Customer Material P/N | 6) 容量偏差    | Tolerance on Rated Capacitance |
| 2) 风华物料号 P/N | FENGHUA Material P/N  | 7) 规格尺寸    | Specification                  |
| 3) 批号        | Lot number            | 8) 日期      | Date                           |
| 4) 数量        | Quantity              | 9) RoHS 标识 | RoHS                           |
| 5) 系列        | Series                | 10) 二维码    | QR code                        |

其中批号的填写      Lot number

1
2
3
4
5
6
7
8
9
10
11
12
13
14

类别   年份   月份   日期   区别号


流传单号码

Sort   Year   Month   Date   Discriminate mark

Sequence number

\* 编带产品包装规范与数量      Taped packaging quantity

直径 ΦD(mm)	数量 (只) Qty. (Pcs)	L(电容高度)≤22mm
		L×W×H(mm)
Φ6.3	1500	328×235×50
Φ8	1000	
Φ10	600	



\* 散装品包装数量      Bulk packaging quantity

直径 ΦD(mm) Diameter	高度 L(mm) Length	数量 (只/袋) Quantity (pcs/bag)	袋/盒 bag/box	内箱/外箱 Inner box/outer box	(只/箱) psc/box
Φ6.3	8-15	1000	8	4	32000
Φ8	5-12	500	8	4	16000
Φ10	9-13	500	6	4	12000

### ◆贮存方法 Storage Methods

\* 请保管在室温 5℃~35℃，湿度 75%RH 以下，无阳光直射的环境

\* (1)产品储存期限: ≤12 个月;

\* (2)产品储存期限超 12 个月时，需充电后再使用

\* (3)产品储存时间超过 3 年的应报废处理

\* (4)库存有效期以套管上印刷的时间开始计算

\* (5)请尽量以包装状态保管

\* (6)避免在下列环境中保管

- ① 溅水、高温高湿及结露的环境;
- ② 溅油、或者充满气体油成分的环境;
- ③ 充满酸性有毒气体 (硫化氢、亚硫酸、亚硝酸、氯、溴、溴化甲烷等) 的环境;

\* Store the capacitor in a place where a normal temperature condition (5°C to 35°C) and a normal humidity condition (Less than 75% RH) are maintained and direct sunlight is blocked.

\* (1) Storage life: ≤12 months;

\* (2) If storage life time is over 12 months, the products need to be recharged;

\* (3) If storage life time is over three years, the products need to be discarded;

\* (4) Expiry date: calculating from the date marked on the sleeve;

\* (5) Please keep capacitors in the original package;

\* (6) Avoid storing the capacitors under such circumstances:

- ① Environment of water splashing, high temperature, high humidity and dewing;
- ② The environment that splashes oil, or is filled with gas oil;
- ③ With full of acid toxic gases environment such as (hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, bromine, methyl bromide, etc.

## ◆ 铝电解电容器使用注意事项

### Precautions for using aluminum electrolytic capacitors

\* (1)直流铝电解电容器应按正确的极性使用

当直流铝电解电容器被反极性接入电路时, 电容器会导致电子线路短路, 由此产生的电流会引致电容器损坏。若电路中有可能在负引线施加正极电压, 请选用无极性产品

\* (2)在额定工作电压以下作用

当电容器上所施加电压高于额定工作电压时, 电容器的漏电流将上升, 其电气特性将在短小时内劣化直至损坏。注意电压峰值请勿超出额定工作电压。虽然规定了超过额定电压的浪涌电压, 但有限制条件, 不能保证长时间使用

\* (3)常规产品禁止作快速充放电使用

当常规电容器被用作快速充电用途。其使用寿命可能会因为容量下降, 温度急剧上升等而缩减。

\* (4)施加纹波电流应小于额定值

施加纹波电流超过额定值后, 会导致电容器体过热, 容量下降, 寿命缩短。所施加纹波电压的峰值应小于额定工作电压。

\* (5)使用温度

请不要在高温(超过工作上限温度的温度)下使用。如果超过工作上限温度使用, 电容器的寿命会缩短, 并导致压力阀动作等破损。不仅限于环境温度及机器内的温度, 请确认机器内的发热体(晶体管、电阻等)的辐射热、包括纹波电流自身发热等在内的电容温度。另外, 请不要在电容的背面配置发热体等。此外, 电容的寿命受使用温度的影响, 所以请在工作上限温度内使用。如果将温度设定的较低, 寿命会延长。

\* (6)引出线强度

当拉力施加到电容器引出线，该拉力将作用于电容器内部，这将导致电容器内部短路，开路或漏电流上升。在电容器焊装到电路板，请勿强烈摇动电容器。

\* (7)焊接过程耐热性

铝电解电容器装至电路板进行浸焊或波峰焊时，其塑料套管可能因焊接时间过长、温度过高而发生破裂或二次收缩。

\* (8)电路板的安装孔距及安装位置

电路板安装孔的设计应与产品说明书的引线脚距一致，如果将电容器强行插入孔距不配套的电路板，那么会有应力作用于引出线，这将导致短路或漏电流上升。

\* (9)铝电解电容可能会有残留电压，请在使用前对电容器进行放电。

(1) DC aluminum electrolytic capacitors should be used according to the correct polarity

When a DC aluminum electrolytic capacitor is connected to a circuit with reverse polarity, the capacitor will cause a short circuit in the electronic circuit, and the resulting current will cause damage to the capacitor. If it is possible to apply positive voltage to the negative lead in the circuit, please choose a non-polar product.

(2) Function below rated operating voltage

When capacitor is used at higher voltage than the rated voltage, leakage current increases, characteristics drastically deteriorate and damage in a short period may occur as a result. Please take extra caution that the peak voltage should not exceed the rated voltage. Although capacitors specify a surge voltage that exceeds the full rated voltage, it does not assure long-term use but limited use under specific conditions.

(3) Conventional capacitors are prohibited from being used for fast charging and discharging

When aluminum electrolytic capacitors for general purpose are employed in rapid charge and discharge application, its life may be shorted by capacitance decreasing, heat rising, etc.

(4) The applied ripple current should be less than the rated value

Excessive heat will reduce capacitance and result in shortened life of capacitor if ripple currents exceeding the specified rated value are applied. The peak value of the ripple voltage should be less than the rated voltage.

(5) Operating temperature

Do not apply high temperatures that exceed the upper limit of the category temperature range specified for the capacitors. Using the capacitors at temperatures higher than the upper limit will considerably shorten the lifetime of the capacitors and make the pressure relief vent open. The temperature, please confirm the temperature of the capacitors which included the ambient temperature of the device, not only the temperature in the device but also radiant heat of the heating element (power transistor, resistance) in the apparatus, self-heating caused by the ripple current. Additionally, please do not place heating element on the back side of the capacitors. In addition, please use the capacitors within category temperature range because the life of the capacitors are affected by the operating temperature. In other words, lowering ambient temperatures will extend the expected lifetime of the capacitors.

(6) Terminal Strength

When a strong force is applied to the lead wires or terminals, stress is put on the internal connections. This may result in short circuit, open circuit or increased leakage current. It is not advisable to bend or handle a capacitor after it has been soldered to the PCB board.

(7) Heat resistance during welding process

In the dip soldering process of PCB board with aluminum electrolytic capacitors mounted, secondary shrinkage or crack of PVC sleeve may be observed when solder temperature is too high or dipping time is too long.

(8) Installation pitch-row and installation position of circuit boards

PCB board must be designed so its hole coincides with the lead pitch (lead spacing) of the capacitor specified by the catalog or specifications. When a capacitor is forcibly inserted into an unmatched hole, a stress is put on the leads. This could result in a short circuit or increased leakage current.

(9) Aluminum electrolytic capacitors may have residual voltage, please discharge the capacitor before use.

◆ **推荐安装/焊接方法 Recommended Installation/Welding Methods**

\*波峰焊接条件


预热: 105°C

波峰焊: 260±5°C 10±1 秒以下 (或 380±10°C 3±0.5 秒以下: 手焊)

\*Wave Soldering Conditions

Preheating: 105°C

Wave Soldering: 260±5°C for ≤10±1 seconds (or 380±10°C for ≤3±0.5 seconds for manual soldering)

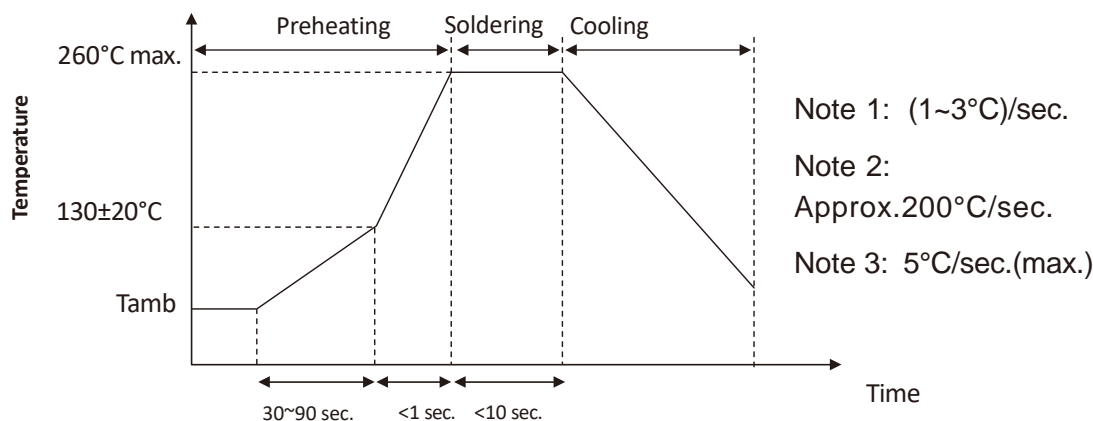

◆ **其它说明 OTHERS**

\*本产品不含铅、镉等元素

This product does not include Plumbum or Cadmium.

注：上述所提供之内容为产品规格说明。在产品未变更时，风华保有修改此内容不另行通知之所有权利，任何产品变更将会以 P C N 通知客户。